

AUDIO ENGINEERING

March
1952
35c

Be
Your Own
Custom-Builder
see page 24



THE WORLD OF SOUND



They bring true listening enjoyment to millions—through the finest in modern sound recording methods and equipment

RCA Victor's modern Vinylite phonograph records are infinitely superior to the old shellac pressings of a few years ago. Better in tone quality, distortion, surface noise and frequency range. This improvement in quality requires more precision than ever before in every step of record manufacture and processing. That's particularly true of the original sound recording and the master discs from which the stampers are made. And RCA Victor has found that Audiotape and Audiodiscs are an ideal combination to meet the exacting demands for today's high fidelity phonograph records — Audiotape for clearest recording of the original sound and Audiodiscs for fast, easy processing without loss of sound quality. In fact this record-making combination is now being used with outstanding success by America's *leading producers* of fine phonograph records and broadcast transcriptions.

Whatever *your* recording work may be, Audiotape and Audiodiscs offer you this same sound perfection — the result of more than 12 years of specialized experience by the only company in America devoted solely to the manufacture of fine sound recording media, both discs and tape.


AUDIO DEVICES, Inc.

444 MADISON AVE., NEW YORK 22, N. Y.
Export Dept.: 13 East 40th St., New York 16, N. Y., Cables "ARLAB"

...including
audiotape*
for the original sound



...and **audiodiscs***
for the master recording



*Trade Mark

Successor to **RADIO** —Established 1917

AUDIO ENGINEERING

INCLUDING



C. G. McProud, Editor

Ladd Haystead, Publisher

Marrie K. Richardson, Associate Editor

Luci Turner, Production Manager S. L. Cahn, Advertising Director

Lucille Carly, Circulation Manager H. N. Reizes, Advertising Manager

Editorial Advisory Board

Howard A. Chinn

John D. Colvin

C. J. LeBel

J. P. Maxfield

George M. Nixon



Representatives

H. Thorpe Covington, Special Representative
677 N. Michigan Ave., Chicago 11, Ill.
Sanford R. Cowan, Mid-West Sales
67 W. 44th St., New York 18, N. Y.
James C. Galloway, Pacific Coast Sales
816 W. 5th St., Los Angeles 17, Calif.
Technical Book & Magazine Co.
297 Swanston St., Melbourne, C. I.
Victoria, Australia

CONTENTS

MARCH, 1952

Vol. 36, No. 3

Audio Patents—Richard H. Dorf	2
Technica	6
Letters	10
Editor's Report	12
Audiana	14
Pickup Tracking Error—Edgar M. Villchur	17
How Good is an Audio Transformer?—N. H. Crowhurst	20
Design and Construction of Horn-type Loudspeakers—Part 1— Wayne B. Denny	22
Be Your Own Custom-Builder—Jay Carver and Cliff Howard	24
The Best British Records of 1950-1951—H. A. Hartley	28
Equipment Report—Bell 2145-A Amplifier	30

AUDIO engineering society SECTION

AES News	32
Employment Register	32
How to Use Magnetic Pickups—Ulric J. Childs	35
Record Review—Edward Tatnall Canby	38
Audio in the Home—William C. Shrader	47
New Products	48
New Literature	59
NEDA and The REPS Dine and Dance Together	60
Price and Product Changes—Radio's Master Reports	61
Audio Techniques	63
Improved Cathode Bias Circuit Affording Fixed Bias	
Audio Engineering Society Membership Application	64
Industry People	65
Advertising Index	66

COVER

The high-fidelity home music system doesn't have to be encumbered by a large and complicated control unit—as indicated by the complete control section of the Bell 2145-A amplifier, described in this month's Equipment Report on page 30. Aside from the phonograph turntable and the radio tuner—which may be located in a convenient closet or bookcase—this small box provides complete control of the amplifier. Photographed in the new sound studio of Hudson Radio and Television Corporation in New York.

RADIO MAGAZINES, INC., 342 MADISON AVE., NEW YORK 17, N. Y.

AUDIO ENGINEERING (title registered U. S. Pat. Off.) is published monthly at 10 McGovern Ave., Lancaster, Pa., by Radio Magazines, Inc. (D. S. Fotts, President, Henry A. Schuber, Secretary-Treasurer. Executive and Editorial Offices: 342 Madison Avenue, New York 17, N. Y. Subscription rates—United States, U. S. Possessions and Canada, \$5.00 for 1 year, \$5.00 for 2 years; elsewhere \$4.00 per year. Single copies 35c. Printed in U. S. A. All rights reserved. Entire contents copyright 1951 by Radio Magazines, Inc. Entered as Second Class Matter February 9, 1950 at the Post Office, Lancaster, Pa. under the Act of March 3, 1879.

AUDIO ENGINEERING • MARCH, 1952



Shallcross for PRECISION RESISTORS

Accuracy from $\pm 1\%$ to
0.05% as required—
Any mounting arrangement

Over 50 Standard
Types Including:

JAN-R-93 types
including both "A" and "B" characteristics

High-stability types
(Tolerance 0.01%, Stability 0.003%)

Matched pairs and sets

Miniature types

Hermetically-sealed types

Low-temperature
co-efficient types

Types with pre-determined
time constants

Lug-type midguts,
hermetically-sealed

Vertical style resistors

Precision power types

Multi-unit strip resistors

Potted types

Special card resistors

Write for Shallcross Data
Bulletin R3A

Shallcross Manufacturing
Company
Collingdale, Pa.

Come again Audio men!

The 1952 IRE Convention once again presents some of the latest developments in audio engineering, on

**Audio Day—
Monday, March 3, 1952**

The session sponsored by the IRE Professional Group on Audio is organized by William S. Backman, and will be under the chairmanship of Dr. Leo L. Beranek. It meets at 2:30 P.M. in Maroon Hall at Grand Central Palace.

Papers presented will be:

"Microphones for the Measurement of Sound-Pressure Levels of High Intensity over Wide-Frequency Ranges"
—J. K. Hilliard

"An Instrument for Measuring the Time-Displacement Error of Recorders"
—E. N. Dingley, Jr.

"A Method for Measuring the Changes Introduced in Recorded Time Intervals by a Recorder-Reproducer"
—J. F. Sweeney

"Application of Electric-Circuit Analogies to Loudspeaker Design Problems"
—B. N. Locantini

"A Sound-Survey Meter"
—A. Peterson

Also visit the Audio Center Exhibits on this same third floor, where in special sound theatres and exhibits you will see the latest audio equipment.

Registration is \$3.00 for non-members, \$1.00 for IRE members.


SETS THE PACE

**Come and See
356 Exhibits**

**Radio Engineering Show - March 3-6,
Grand Central Palace New York City 1952**



AUDIO PATENTS

RICHARD H. DORF*

ONE OF THE SEVERAL annoying things about the telephone is the fact that to use it you must hold the instrument to your ear. That automatically puts one hand out of business. To overcome the handicap numerous shoulder rests have been devised, each of which requires a different type of contortionism.

How much nicer to have a loudspeaking telephone in a little box like an intercom with no talk-listen switch to operate except at the beginning and end of a call. Ralph K. Potter is the inventor of such a device, covered in patent No. 2,568,823, and assignor of the patent to Bell Telephone Laboratories, Inc. The primary problem with such devices—which if successful would find use in switchless intercom as well as other systems—is acoustic feedback. This has been eliminated in the patent by a novel and ingenious use of a modulated ultrasonic carrier rather than an audio output for the loudspeaker.

Figure 1 is a diagram of the electrical circuit in semi-block form. A microphone mounted in the unit excites a transmitting audio amplifier, the output of which is sent through a standard telephone hybrid transformer to the telephone line. Incoming signals from the line are fed to a receiving audio amplifier. A 30-kc oscillator in the receiving circuit is modulated by the received signals and the modulated 30-kc carrier is emitted by an ultrasonic transducer. The user of the equipment wears in one ear a small, simple, unpowered detector unit which rectifies the 30-kc waves, demodulating them so that he can hear the audio. More on the demodulator later.

The purpose of the hybrid coil in Fig. 1 is to prevent excessive transmission of microphone signal to the receiving amplifier and modulator without substantially attenuating transmission of microphone signals to the telephone line or line signals to the receiving circuit. Output from the transmitting amplifier goes to the two primary windings L_3 and L_4 . The second-

aries L_1 , L_2 , L_3 , and L_4 feed signals to the line and to the balancing resistance, which matches the line resistance. The two secondary signals, as can be seen by tracing the phasing through the two meshes, pass through the receiving amplifier input in opposite phase and if all the elements are balanced they cancel. In practice there is usually a slight unbalance, which permits some signal to pass from the microphone to the modulated oscillator, giving a little desirable sidetone.

The detector worn in the user's ear may take any of several shapes, none of which involves any electrical elements at all. Figure 2 illustrates one form, a substantially cylindrical metal (nickel silver) shell about 1.25 cm long with an inside radius of about 0.4 cm. The left end has a central opening with a radius of about 0.25 cm, while the right end consists of a slightly dome-shaped metal diaphragm with a curvature radius





Fig. 2, left; Fig. 3, right.

of about 0.6 cm. Because of the dome shape, any air pressure waves entering the cylinder through the opening at the left end can cause the diaphragm to flex outward (to the right) but rarefactions cannot cause it to flex inward. Thus only half of each ultrasonic pressure wave will be reproduced in a diaphragm motion. When the cylinder is placed in the ear with the diaphragm facing inward, the device effectively rectifies the ultrasonic waves before they reach the ear and the ear recovers the modulation. The ear acts as its own 30-kc filter, of course, since it is insensitive to discrete 30-kc waves. For actual use the detector device is covered with soft felt so that it


[Continued on page 4]

* 255 West 84th St., New York 24, N. Y.

Fig. 1

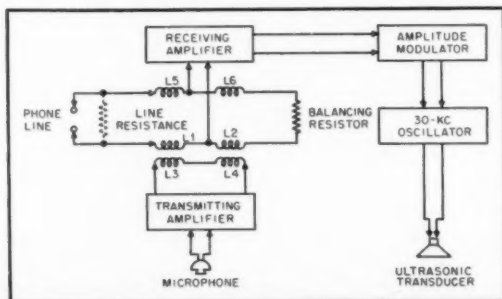

Model RC-80
GARRARD "Triumph"
THE WORLD'S FINEST RECORD CHANGER

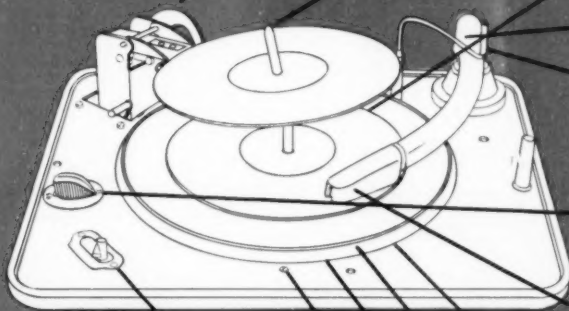

PLAYS ALL 3 SPEEDS
—fully automatic with
automatic stop.

*A triumph of engineering,
with every feature tested
for finest performance.*

GARRARD SALES CORP. Dept. 3 E 164 Duane St., New York 13

Gentlemen:
I am interested in learning more
about the Garrard "Triumph"
3-speed record changer. Please
tell me, with no obligation, where
I can see and hear it in my area.

NAME.....
ADDRESS.....
CITY..... ZONE..... STATE.....

Minimum cabinet space required is 13 1/2" long x 12 1/2" wide with
3 1/2" clearance above and 3 1/2" clearance below top of motor board.

PUSHER TYPE PLATFORM:

Adjusts simply to 7"-10"-12" records regardless of diameter or size of spindle hole.


No record changing mechanism has been developed to equal the performance of the precision pusher platform. For records with standard center holes, the pusher platform is the only method that gives positive gentle record operation.



TWO INTERCHANGEABLE SPINDLES

Easily inserted, the two Garrard spindles accommodate all records as they were made to be played. (If user prefers one spindle can be used throughout simply by plugging center hole of 45 rpm records).

a) Typical Garrard spindle for standard center holes.
b) Easily inserted wide spindle, for 45 rpm records, remains stationary when record is played. Only a small collar revolves, assuring longer center hole and record wear.



HEAVY DRIVE SHAFT:


A unique feature! Exclusive with Garrard!

Drive shaft for 33 1/3 rpm and 45 rpm is heavy, thus obtaining more consistent quality at critical low speeds. Wows and wavers eliminated.




BALANCED TONE ARM:

Parallel lift tone arm construction guarantees true tangent tracking. Disturbing resonance eliminated.



AUTOMATIC STOP:

Insures positive and unfailing action at end of any type of record and returns tone arm to rest position.



TRIPLE SPEED SWITCH:

Speed changes are clearly marked, easily made. The RC-80 plays 33 1/3, 45 and 78 rpm. Records are placed on the player and simple settings made. Action is then completely automatic, including automatic shut-off after last record of any size.



INTERCHANGEABLE PLUG-IN HEADS:

Carefully engineered to accommodate user's choice of crystal, magnetic or variable reluctance cartridges for standard and microgroove reproduction, such as Astatic, Audak, G.E. Variable Reluctance, Pickering, Garrard Magnetic, etc.




HEAVY DUTY SILENT MOTOR WITH ABSOLUTELY NO RUMBLE:

Speed maintained throughout a wide variation in line voltage. There is no appreciable speed variation operating unit "cold" with a full load, or "hot" with one record, regardless of weight, thickness or diameter of records.




WEIGHTED TURNTABLE:

RC-80 turntable is heavily weighted to give firm action. No turntable rumble. No "wows", no wavering reproduction.



MUTING SWITCH:

No sound while changer operates on run-in or run-off grooves. Continuity of music undisturbed by noises.




SIMPLE INSTALLATION:

Mounting holes are identical with former Garrard models, so that replacement is very simple. Unique spring suspension.



CONVENIENT START-STOP-REJECT LEVER:

Start, stop and reject lever are combined and located conveniently away from tone arm.



Changer operates on 100/130 and/or 200/250 volts, 60 cycles, A.C.
(50 cycle bushing available.) D.C. model also now available.

PROBLEM:


How to produce
fine-quality tape recorders
at low cost?

SOLUTION:

Specify the New **SHURE** TR16
low cost magnetic
recording head for
record and playback!

Now available for the first time to the manufacturers of tape recording equipment—the TR16 tape-head provides fine quality at exceptionally low cost. This means that for the first time, you can provide your customers with excellent reproduction in even your lowest-cost models.

The TR16 is the result of almost five years experience in the development of mass production-line techniques for the manufacturing of magnetic recording heads. Coupling amazingly low cost with high-quality performance, the TR16 is outstanding in the field of tape recording. Listed below are the unique features of this magnetic recording-playback head:



★
NEW TE2 MAGNETIC ERASE HEAD
No less outstanding in its contribution
to low cost fine-quality tape-
recording is the new Shure erase
head, Model TE2.

SPECIAL FEATURES

1. Low cost.
2. High quality—excellent frequency response.
3. Compactness. The TR16 is only .765" wide by .845" long by .609" thick.
4. Precision-controlled track width may be furnished with a track of from .025 to .100 inches.
5. Flexibility of mounting.

6. May be used for multiple-track applications.
7. Utilizes the famous Shure pin-jack pin-terminal combination method of attaching leads.
8. Ideal for use with pre-recorded tape.
9. Highly recommended for use in dictating or low cost playback machines.
10. Effective mu-metal shielding for optimum hum reduction.
11. Provides low cost production assembly.
12. Simplifies field replacement.

SHURE

Patented by Shure Brothers, Inc.

SHURE BROTHERS, Inc. ★

225 W. Huron St., Chicago 10, Illinois

MANUFACTURERS OF MICROPHONES
AND ACOUSTIC DEVICES

Cable Address: SHUREMICRO

fits well and does not cause discomfort because of the cold metal. The flange at the outside end of the unit prevents it from entering the ear canal too deeply.

Figure 3 shows another form of rectifier. A small ear-fitting tube has two diaphragms, one at each end, connected by a light silk thread. The thread is maintained at the right tension so that when the left diaphragm (facing outward) is distended outward by a rarefaction of air it pulls the right diaphragm (facing into the ear) in the same direction. But, when the left diaphragm is pushed inward by a pressure half-cycle, the thread merely slackens and the right diaphragm does not move. The patent shows several other forms as well.

Single-Tube Phase Inverter

Phase inverters have been the subject of much controversy with respect to balance at all frequencies and similar questions, none of which the writer intends to get into, at least at the moment. It does look, however, as though the ingenious new circuit diagrammed in Fig. 4 would balance well—and it has the advantage of using only a single tube, yet giving considerable amplification as well as phase inversion. The circuit is the invention of Kurt Enslein, covered by Patent No. 2,571,431, assigned to Stromberg-Carlson.

The 6BN6 gated-beam tube is used in the circuit. In this tube a sharply focused electron beam passes through two control grids, the first and third, each of which has an unusually steep and linear transfer characteristic. Grid No. 2 is an accelerator electrode. Because the total cathode current of the tube is limited to a certain maximum value by the shaped electron beam, the total cathode current remains constant despite changes in the voltage applied to grid No. 1 (or No. 3). Therefore, when the plate current increases the accelerator electrode current decreases, the relative




Fig. 4

amounts in each case being determined by the respective transconductances of the control grid to the plate and accelerator. This transconductance has a high positive value with respect to plate and a somewhat smaller negative value with respect to accelerator.

As the diagram of Fig. 4 shows, the input signal is fed to grid No. 1 and one output derived from the plate in the usual manner. Since the transconductance of the accelerator is negative (its current varying in opposite phase to that of the plate), a second output may be taken from it; and this accelerator output is in opposite phase to that of the plate, giving, obviously, a phase inverter with outputs 180 deg. apart with respect to ground common point.

To make the two outputs have equal amplitudes, it is only necessary to choose the plate and accelerator resistors so that

[Continued on page 62]

REEVES

SOUNDCRAFT

THE ONLY MANUFACTURER OF RECORDING MEDIA
WITH 20 YEARS' EXPERIENCE IN SOUND RECORDING

ANNOUNCES NEW PRODUCTS . . .

NEW DEVELOPMENTS . . .

NEW ERA IN MAGNETIC SOUND

NEW IMPROVED SOUNDCRAFT TAPE

Only Soundcraft SPN magnetic recording tape with improved formulation has these new exclusive features. Available in all standard sizes.

UNIFORM COATING THICKNESS to produce the ultimate in sound fidelity.

PRE-COATED BASE, BUFFED, SURFACE

LUBRICATED to assure smooth, curl-free operation, uniform output level and high frequency response, plus years of extra service.

NEW SOUNDCRAFT 5 DRAWER CHEST

PERMANENT FILING CABINETS—with five drawers, constructed of durable, lined boxboard, containing 625 or 1250 ft. sizes, at no extra cost. Only Soundcraft can make this offer.

BUILD A BETTER TAPE LIBRARY. Recordings of fine artists, sound effects, memorable events can now be conveniently filed with the aid of this new cabinet.

NEW SOUNDCRAFT DISCS

Only Reeves SOUNDCRAFT

Recording Discs offer the latest developments to reduce surface noise to the point of inaudibility and produce the last word in fidelity.

INGREDIENTS OF PERFECTION


Heavy aluminum bases free of imperfections, with flawless mirror-like finish, guaranteed flatness, fine-grain lacquer which has been subjected to micro-filtration and blended with chemically pure solvents.

FACTORY WITH MAN-MADE WEATHER

Unlike most discs, Soundcraft Discs are manufactured in a weather-controlled factory, under dust-free conditions.

Temperature and relative humidity are completely regulated.

Soundcraft Discs, because of these controlled conditions, are delivered the year 'round.



REEVES

SOUNDCRAFT

10 East 52nd Street New York 22, N. Y.

THE ONLY
RECORDING MATERIALS PERFECTED

AND MANUFACTURED

BY RECORDING SPECIALISTS

Please write Reeves Soundcraft for additional information.

The TURNTABLE is the **HEART** of your HIGH FIDELITY SYSTEM

You may own the finest pickup, amplifier and speaker that money can buy...yet you'll get poor reproduction if your TURNTABLE has excessive wow, hum or rumble!

REK-O-KUT

...offers a complete range of 12" Turntable models to match your present high-fidelity equipment and your own pocketbook. Not every sound system requires the most expensive turntable...your turntable must be chosen to complement your other components. Each REK-O-KUT Turntable carries an engineering specification which enables your Sound Dealer to select the appropriate unit. The quality and workmanship of every REK-O-KUT Turntable, from our most economically-priced model, to our highest priced professional machine is identical...price differential is dependent solely upon the type of materials used.



MODEL LP-743

3-Speed 12" Turntable
Induction type motor, designed for smooth, vibration-free operation. Instantaneous speed changes without stopping turntable or removing disc...\$54.95 Net



MODEL CVS-12

All-Speed Continuously-Variable Turntable

Plays all records, 6" to 16" and broadcast transcriptions, not only at the three normal speeds, BUT AT ANY SPEED from 25 to 100 RPM. You play your records at the EXACT SPEED at which they were recorded, or at any variation of speed or pitch which gives you a maximum pleasure. A "must" for serious music lovers, pro musicians, schools, dance studios, etc.

\$84.95 Net

MODELS T-12H & T-43H

2-Speed 12" Turntables

The only 12" dual-speed turntables that meet the standards for speed regulation and WOW content specified by the National Association of Broadcasters.

Recommended for use with ULTRA HIGH FIDELITY Amplifiers and Speaker Systems.

MODELS	MOTOR	SPEED	PRICE
T-12 H*	Hysteresis Synchronous	78-33 1/2	\$110.95
T-43 H*	Hysteresis Synchronous	45-33 1/2	\$110.95
T-12	4 Pole Induction	78-33 1/2	\$84.95
T-43	4 Pole Induction	45-33 1/2	\$84.95

* Delivery limited to very short supply of Hysteresis motors.

See...hear...compare REK-O-KUT Turntables, Phonographs and Professional Disc Recorders at leading Music Stores, Audio-Visual Dealers and Radio Parts Jobbers...or write for latest, free Catalogue.

REK-O-KUT CO.

38-01 Queens Blvd., Long Island City, N. Y.

EXPORT DIVISION: 454 Broadway, New York City, N. Y. 5

CORPORATE: 4545 RADCLIFFE, LTD., 100 King St. W., Toronto 28, Ontario

TECHNICANA

Magnetic Sound Film in Great Britain

Developments in the field of magnetic sound film in Great Britain are discussed by O. K. Kolb in an article appearing in the November 1950 *J. Soc. Mot. Pict. & Tele. Engrs.* Available in Great Britain are three types of film stock, the differences being in the width coated. The first has a coating for its full width, the second is coated only between sprocket holes, while the third is coated for half its width with magnetic material, the other half being coated with a zinc oxide-lacquer mixture upon which a trace of the sound level or envelope may be made.

A comparison of a medium hard American film, a British film, and a Continental


bulk erasing both the film and electromagnet are moved. The film rotates and the magnet is subjected to translatory motion.

The conclusions reached by the author bear out practices here in that it does not appear that magnetic recording will displace photographic recording for the finished prints. However, all the recording up to the final print will be magnetic, with its attendant ease of editing, splicing, and re-use of stock.

Theatre Sound System

The new Simplex XL theatre sound system is described in the May 1951 *J. Soc. Mot. Pict. & Tele. Engrs.* By B. Passman and J. Ward, the article not only describes

Fig. 1

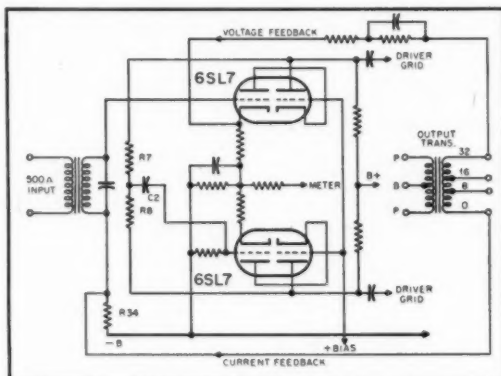

film as to bias, level, and response are presented. The British film requires about half the bias that the American film needs for maximum output, while the Continental film needs almost as much bias as the American film. When a system is adjusted for flat response from the British film and only the record bias adjusted, the American film has 10 db higher output with a rising high-frequency response, while the Continental film is down 2 db from the output of the British product and has a drooping low-frequency response.

Splicing and erasing techniques appear to be similar to those used in the United States with the major exception that in

the equipment, but gives the design philosophy. Important system features include dual exciter lamps on a turret, 20-db preamplifier feedback, low preamplifier distortion, separate preamplifier for nonsynchronous inputs and standby, and a multipurpose power amplifier.

The nonsynchronous preamplifier has the same changeover features as the sound head pre-amps so that phonograph and line input facilities do not have to be designed and haywired into the system by the installation engineer. Also it provides a spare unit for replacement in the sound head in case of failure of one of the plug-in pre-

[Continued on page 8]

TABLE I

Preferred Maximum Sound Level in db above 10^{-12} watts per cm^2

	Public		Musicians	Program Engineers		Engineers
	Men	Women		Men	Women	
Symphonic Music	78	78	88	90	87	88
Light Music	75	74	79	89	84	84
Dance Music	75	73	79	89	83	84
Speech	71	71	74	84	77	80



THE GATES DYNAMOTE
Here is the latest model GATES
DYNAMOTE — as new as next
fall's election!

YOU'RE THERE WITH THE

Gates "Dynamote"

Some Outstanding DYNAMOTE Features

- Three microphone channels
- Public address take-off with level control
- Cue circuit to studios
- A.C. or battery powered
- Instant — automatic — changeover to batteries if line fails
- High gain — low noise
- Four inch V.U. meter with dimmer control
- Completely self-contained
- Weighs just 31 pounds with batteries installed
- One-piece construction



Whether baseball or politics, symphony or jazz — you can be sure of clean, crisp quality when Dynamoting your "out of studio" shows.

The GATES DYNAMOTE, originated about two decades ago at the advent of the Dynamic microphone, is each year brought up to date as the latest major league standings. — Your 1952 Dynamote is the engineers' choice, the producers' choice and the people's choice — compulsory, of course, because GATES DYNAMOTES are used wherever there is broadcasting.

Heavy political and sports coverage will create unusual demands on remote facilities. Recognizing this, production on the GATES DYNAMOTE has been increased. Orders are being handled same day as received in most cases.

GATES

GATES RADIO COMPANY, QUINCY, ILLINOIS, U.S.A.
MANUFACTURING ENGINEERS SINCE 1922

2700 Polk Avenue, Houston, Texas • Warner Building, Washington, D. C. • International Division, 13 E. 40th St., New York City
Canadian Marconi Company, Montreal, Quebec

These Great Names Use AMPEX...

American Broadcasting Company
Apex Recording
Peter Bartok
British Broadcasting Corp.
Capitol Records — New York & Hollywood
Carnegie Hall Recording Company
Columbia Records, Inc.
Fulton Recording
Gotham Recording Co.
Gray-O'Reilly Studios
Ice Capades, Inc.
Les Paul & Mary Ford
Zeke Manners
Mutual Broadcasting System
Muzak
Nola Studios
Peter Lind Hayes
Radio Free Europe
Arturo Toscanini
Fred Waring Enterprises
Warner News, Inc.
Westminster Recordings
WOR Recording
Columbia Broadcasting System
Concert Hall Society
Empire Broadcasting Corp.
MGM Recording
Mercury Records, Inc.
Movietone, Inc.

These great names and many others use professional quality Ampex Magnetic Tape Recorders...

SOLD AND SERVICED BY



Exclusive in Canada

Canadian General Electric Co., Ltd.
212 King Street, West
Toronto, Canada

In Washington, D. C.

Gallant Engineering Company
261 Constitution Avenue
Washington 1, D. C.

Audio & Video Products Corporation
730 Fifth Ave., New York 19, N. Y.

Please send me details and literature describing the following Ampex equipment: (Check one or both)

Ampex Model 300... ☐ Ampex Series 400-A... ☐

Name _____

Title _____

Company Name _____

Mail Address _____

amps in the sound head during a run. The power amplifiers are unique in that they make use of cascode floating paraphase phase inverters, and have both voltage and current negative feedback to provide low distortion and stability without reducing the internal impedance of the amplifier. Two sizes of power amplifier are available, one using 807's and delivering 70 watts, and the other a low power unit using 6L6's and capable of handling 20 watts. The output tubes in both cases are driven by cathode followers. Figure 1 shows the cascode phase inverter stage. All of the rack- and wall-mounted equipment is designed for ease of maintenance, using either a drawer chassis that pulls out and turns over or doors giving access to terminal boards.

Specially designed loudspeaker systems have been provided to handle theatres of all sizes and for installation in drive-in theatres.

TV Audio Console

A new audio console for television studios is described by Robert W. Byloff in the June 1951 *RCA Review*.

A removable housing is provided at the back of the console to take five ten-inch video monitors, and panels are provided at each end of the console for auxiliary controls and patching. The main console panel has, in the top row, twelve microphone mixer positions each capable of being sub-mastered on one of three color-coded channels, and a VU meter. Above each microphone fader, therefore, is a translucent window. This is lighted with the appropriate color as the fader positions are switched by push button switches located on the left side panel. Also on the front panel, in the lower row, are the three color-coded sub-master faders, the studio master fader, remote master fader, and controls for studio playback and reverberation. Six lever keys provide switching for remotes, preview, sound effects filter, and auxiliary circuits.

The left side panel contains four auxiliary microphone faders in a separate mixer circuit, sound effects circuits, monitor controls, and the push buttons for assigning faders to the sub-master circuits.

The right side panel includes a jackfield, a dropcord well, microphone equalizer controls, and a switch for selecting either limiting or compression characteristics in the program amplifier.

All the amplifiers, power supplies, re-lays and an auxiliary jackfield are contained in two separate racks. Placing this equipment in racks enables the size of the console, without the video monitors, to be reduced to 66 in. long, 23 in. deep, and 41 in. high. A desk in front of the sloping face will take legal-size paper without any overhang.

New electrical circuits have been developed for the console to permit the flexibility offered by submastering without excessive losses or change in level with switching. Distortion in the over-all system, at a signal level 10 db above normal program level, is below one half of one per cent while the noise is 77 db below the +10 level. The frequency response is flat from 30 to 15,000 cps.

Automatic Chime Sounder

The January 1951 *A.W.A. Technical Review* (Australia) carries an article by W. A. Colebrook on an automatic unit for sounding the Angelus and other bell sequences.

The unit is operated by a clock mecha-

[Continued on page 54]


• *Something worth thinking about—*

*Are Daily
Adjustments
Upping Your
Operating Costs?*

There's a big factor showing up in the tape recording world . . . it's the tragedy of *High Maintenance Costs*. Many radio stations are confronted with the daily ritual of recorder checking and adjusting. Added to the time cost of such inspections is the cost of frequent parts replacements and loss of program time.

In contrast, Ampex users find their equipment will operate continuously eighteen hours a day with but infrequent inspection. Upkeep and replacements are almost nil; heads have remarkably long life. Ampex performance is constant over long periods of continuous operation. Long life with low maintenance is assured in each Ampex recorder by high manufacturing standards and complete test of each machine before shipment. It all adds up to one sure fact—Ampex quickly pays for itself out of savings from lower operating costs and added dependability.

**YOU CAN RECORD ON AN AMPEX
TODAY—AND BE SURE OF IDENTICAL
PLAYBACK A YEAR FROM NOW**

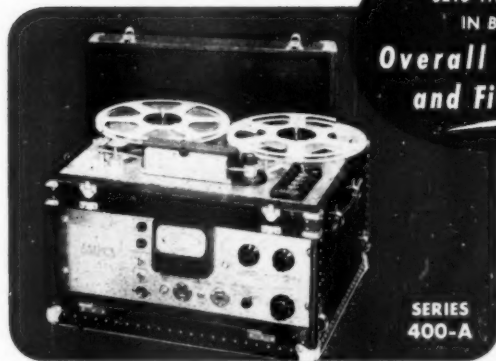

**SERIES
400-A**

**AMPEX
SETS THE PACE
IN BOTH**

**Overall Economy
and Fidelity!**



**MODEL
300**

Complete Specifications on Request

Shown here are the time proven Model 300 Console and the advanced Series 400-A. Throughout the field of professional audio recording these two Ampex machines are the recognized leaders. Model 300 put many a big name artist on tape—Series 400-A incorporates many of its features.

AMPEX
Magnetic Tape Recorders

AMPEX ELECTRIC CORPORATION
REDWOOD CITY • CALIFORNIA

AX-71

Dealers in Principal Cities

STANDARD OF THE GREAT RADIO SHOWS



Balanced tone

... from the flashing sunlight
of Mozart to the storm of
Shostakovich

PERMOFLUX
ROYAL EIGHT" WITH
THE FAMOUS
BLUE CONE

Permoflux ROYAL EIGHT"

AUDIOPHILES the country over acclaim the clean, brilliant, life-like musical reproduction of the Permoflux Royal Eight"...the 8" Speaker comparable to any 12"! Combined with the new Permoflux Corner Baffle, Model CB-8-M, the Royal Eight" re-creates original programs with even superior sensitivity and fidelity—every instrument in full-range tonal balance. Here's Big Speaker Performance in a small, easy-to-install frame at a sensible price. (\$22.50 List, less Baffle).

See your Radio Parts Distributor or write to Permoflux today for full information about the complete Royal Blue Line of 6" to 15" Speakers and Baffle Combinations. Ask for Permoflux Catalog J-207.

"Sound in Design!... Sound in Price!"

PERMOFLUX CORPORATION

4902-AW. GRAND AVE., CHICAGO 39, ILL.
236 S. VERDUGO RD., GLENDALE 5, CALIF.

Canadian licensee—Campbell Mfg. Company, Toronto, Canada

LETTERS

Speaker and Microphone Directivity

Sir:

It is somewhat alarming to learn how slowly advanced ideas percolate into production practice.

While Dr. Olson's article in the October 1950 issue, with details of the frequency-directional characteristics of a new RCA speaker, is not the first in recent years on such characteristics of sound transducers, this still prevalent source of distortion appears only now to be receiving attention.

In a series of articles in *Radio Broadcast* during 1925, the writer pointed out in detail the distortion introduced in an otherwise perfect sound system, by non-uniform angular pickup and distribution with varying frequency, of the pickup and reproducing devices. Curves on polar co-ordinates were presented for both microphones and speakers from measurements made at the Staten Island laboratory of Wired Radio, Inc. The curves proved beyond doubt that higher and higher frequencies are more and more attenuated if either the sound source or the listener are displaced off the axis of the transducer. When both are so displaced, the separate attenuations are additive. Thus at no angular position about a reproducer would the spectral distribution be the same as that of the cone motion of a loudspeaker, even though it followed an otherwise perfect system.

A visual analogue consists of a white light source having in front of it an optical device which projects the shortest-wavelength (violet) radiations strongly through a small cone on its axis, and which projects the longer waves (blue, through green, yellow, orange, and red) waves in ever widening solid angles beyond the speaker axis. As with the speaker, there is no point in the light radiation field where one can find the white light of the source behind the optical device.

Over-all sound-to-sound measurements of a system are therefore worthless unless both microphone and loudspeaker are designed so as to have uniform directional characteristics throughout the required audio spectrum of frequencies. Also, the frequency-characteristic curves of microphones and loudspeakers should always be accompanied by frequency-directional curves if they are not to be all but meaningless.

B. F. Miessner,
Van Beuren Road, R.F.D. 2
Morristown, N. J.

Another New Field?

Sir:

I suggest that we expand its primary field of interest and coverage beyond the limits of the audio spectrum. I suggest it might well cover the whole spectrum of sensory and motor response and control. This field would include the whole field of intelligence or data transmission, probably extending from d.c. to 10 mc/sec. Thus it would include all forms of intelligence usefully capable of modulating a carrier, including servo, computer, radar, audio, video, photographic, telemetering, remote control, cryptographic, and other miscellaneous types of data sensing, recording, transmitting, measuring, indicating, and reproducing systems.

[Continued on page 65]

Be Sure of Your Installations

Get the *Aptitude-Tested*

RG/U TRANSMISSION LINE CABLES

• You know what you are doing when you use Belden RG/U Transmission Line Cables—they're aptitude rated. They are designed to provide desirable electrical characteristics, and rigid control assures constant quality. Specify Belden Radio Wires.

Belden Manufacturing Co. 4689-R W. Van Buren St., Chicago 44, Ill.

To You,
Belden's Golden Anniversary Means

—product performance that can come only from a "know-how" that has grown through actual service since the inception of Radio.

—an ability to co-operate in pioneering new wires to meet or anticipate industry's growing needs.

In the years that follow

This Belden Program Is—

—TO BE CONTINUED

APTITUDE RATING No. 8236		APTITUDE RATING No. 8237		APTITUDE RATING No. 8238		APTITUDE RATING No. 8239		APTITUDE RATING No. 8241	
Frequency (Mc)	Attenuation per 100 ft	Frequency (Mc)	Attenuation per 100 ft	Frequency (Mc)	Attenuation per 100 ft	Frequency (Mc)	Attenuation per 100 ft	Frequency (Mc)	Attenuation per 100 ft
100.	2.65	100.	2.10	100.	1.90	100.	3.10	100.	3.75
200.	3.85	200.	3.30	200.	2.85	200.	4.40	200.	5.60
300.	4.80	300.	4.10	300.	3.60	300.	5.70	300.	7.10
400.	5.60	400.	4.50	400.	4.35	400.	6.70	400.	8.30



Belden
Radio WIRE

The
Aptitude-Tested LINE

EDITOR'S REPORT

COMPONENTS

RECENT DISCUSSIONS regarding the components selected by those of us who like to "build our own" test equipment, amplifiers, power supplies, and other electronic apparatus brings to light some interesting facts which have rarely been mentioned in technical literature from the viewpoint of the constructor.

In building equipment for commercial sale—such as mass produced radio and TV sets, for example—the element of cost is of primary importance. The price of a tube socket or a resistor is usually measured in cents at the manufacturing level, but that figure is multiplied by a factor of around five when the finished product appears at the consumer level. Thus if a TV set with 150 resistors should be built with a higher quality part costing only one cent more than the competitive grade, this difference alone makes the selling price of the set some seven and a half dollars greater than if the low-priced part were used. As another example, it has often been said that Lock-in tubes never attained their deserved popularity because their sockets cost three-tenths of a cent more than the simpler-to-make octal.

In the construction of amplifiers or test equipment on a one-of-a-kind basis, or even for those hand-built units often assembled by the custom-builder, the few extra cents—or even dollars—are not of so great importance. When we consider that the average home- or shop-built amplifier involves a cost measured in dollars for the equipment, and probably in tens of dollars for the labor of building and testing, it seems desirable that we take a closer view of the economic advantage obtained by the use of the minimum-priced components. Not that we begrudge the labor—we'd be the last to suggest that the labor cost be taken into account for such equipment as we construct for our own use—but the fact remains that it is actually a factor in the over-all cost of the finished product. Therefore, when we do use a cheaper component, we are risking the performance of the unit for a small percentage of saving, and it is doubtful if this is an intelligent practice.

Many constructors are prone to use half-watt resistors throughout a circuit, unless the current requirements completely preclude it. We believe that any resistor which carries direct current—with the possible exception of a cathode resistor which is usually bypassed, and usually of low resistance value—should be at least of a one-watt rating. In any case, the resistor should be specified to work with a factor of safety of the order of four—one which dissipates 0.23 watts should preferably be a one-watt unit, and so on. The same reasoning applies to the selection of tube sockets, selector switches, coupling and bypass capacitors, wire, cable-plugs and receptacles, and any other component for which there is a high-rated equivalent.

This practice is followed rigorously by manufacturers of equipment for the military services, and for high-quality home construction it is strongly recommended.

MAGNETIC TAPE DIMENSIONS

We have recently had an experience with the dimensions of magnetic tape which led us into an interesting inquiry. In the preparation of our weekly "Audio Time" over WABF (New York), we encountered one box of tape which didn't fit the tape splicer as easily as previous rolls, and in one instance, the tape would bind in the recorder guides.

Mention of this to the manufacturer resulted in his making complete measurements on the tape, which proved to be within the allowable tolerance for width—not greater than 0.250 in. and not less than 0.244 in. This particular roll measured 0.2485. In the discussion of this problem, we learned that some manufacturers started making tape within the allowable limits, then—because tape heads develop a groove from continued passage of tape—the width was gradually decreased in small steps so that continued good performance could be obtained with succeeding shipments of tape.

All of which brings us to the point of this story. As tape heads wear, performance of the machine may be degraded—slightly, perhaps, but measurably. Honing may be resorted to in order to restore the performance to normal, and in professional applications it would be desirable that monthly maintenance checks should include some means of determining if the grooves which wear gradually are contributing to a loss of highs to an objectionable degree.


CONGRATULATIONS

The good-music listener gets little enough to keep him happy from the programming of most radio stations these days, so the recent addition of WNBC (New York) to the ranks of all-night stations six nights a week is received with open arms. Broadcasting on both AM and FM, NBC's flagship is now bringing all types of good music from midnight to six. We may not be the first to congratulate WNBC in print, but *AE's* readers in the New York area will undoubtedly be among those who derive the greatest pleasure from "Music Through the Night."

So far, New Yorkers have been fortunate in having the city-owned station WNYC on the air on FM until three, with classical music. We are unable to figure out why all three of the "good-music" stations in this area—WQXR, WNYC, and WABF—all elect to play chamber music from eleven until midnight. Such a lack of originality in programming is surprising in this day of strong competition. Please, couldn't one of them deviate from this standardization?

While we are at it, we should also congratulate CFRB of Toronto on its 25th anniversary, celebrated on February 19. Unique in that it was the first "batteryless" station, CFRB went on the air in 1927, pouring music into the airways with power and clarity that was revolutionary in those days. The power on the opening night was 1000 watts—it is now 50,000. Again we say, "Congratulations, CFRB."

**CUT CORES
SQUARE
RECTANGULAR
TOROIDAL**

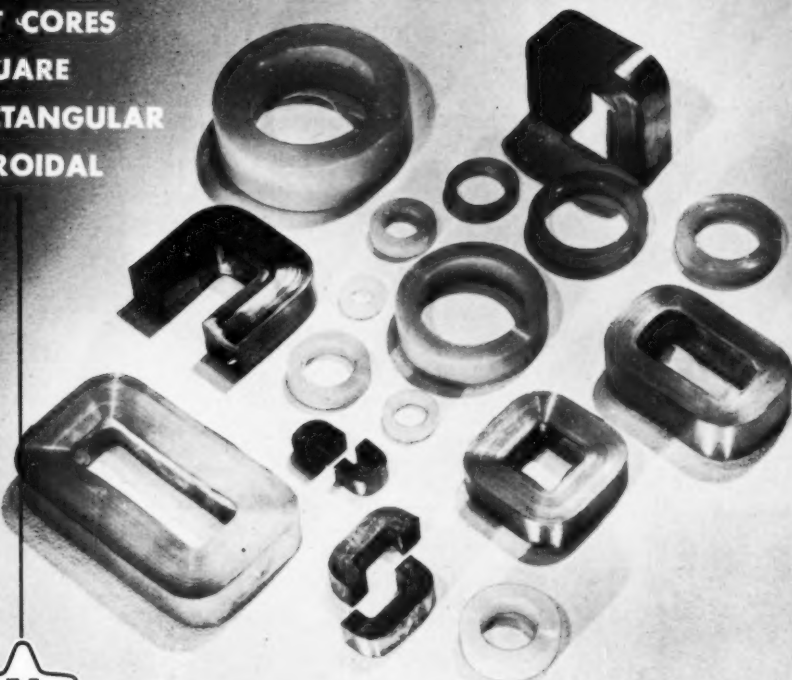

Anything You May Need in **TAPE-WOUND CORES**

RANGE OF MATERIALS

Depending upon the specific properties required by the application, Arnold Tape-Wound Cores are available made of DELTAMAX . . . 4-79 MO-PERMALLOY . . . SUPERMALLOY . . . MUMETAL . . . 4750 ELECTRICAL METAL . . . or SELECTRON (grain-oriented silicon steel).

RANGE OF SIZES

Practically any size Tape-Wound Core can be supplied, from a fraction of a gram to several hundred pounds in weight. Toroidal cores are available in fifteen standard sizes with protective nylon cases. Special sizes of toroidal cores—and all cut cores, square or rectangular

cores—are manufactured to meet your individual requirements.

RANGE OF TYPES

In each of the magnetic materials named, Arnold Tape-Wound Cores are produced in the following standard tape thicknesses: .012", .008", .004", .002", .001", .0005", or .00025", as required.

Applications

**MAGNETIC AMPLIFIERS
PULSE TRANSFORMERS
CURRENT TRANSFORMERS
WIDE-BAND TRANSFORMERS
NON-LINEAR RETARD COILS
PEAKING STRIPS . . . REACTORS.**

WAD 3963


THE ARNOLD ENGINEERING COMPANY

SUBSIDIARY OF ALLEGHENY LUDLIUM STEEL CORPORATION
General Office & Plant: Marenco, Illinois



Selected by broadcasters and sound studios as the best portable tape recorder for hi-fi recording.

Range—50 to 8000 cycles at $7\frac{1}{2}$ "
 50 to 5000 cycles at $3\frac{1}{2}$ "
 Push-Button Control for speed change.
 Rewind • Forward—70 sec. for 1200 ft.
 Amplifier—Auto. equalization at both speeds.
 Heads—Single or dual track.
 Editing Key—Erases or corrects recordings.
 Weight—Only 27 pounds.



Write for Complete Specifications Today!

THE PENTRON CORPORATION

221-AE EAST CULLERTON ST., CHICAGO 16, ILL.
 IN CANADA • ATLAS RADIO CORP., LTD., TORONTO

AUDIANA

How Good is an Audio Transformer

WHILE THE USE of audio transformers in a modern home-music-system amplifier is generally restricted to the one between the output stage and the loudspeaker, the consideration of the quality of this important component must take into account all of the general characteristics of transformers as a class.

In order to study the effect of various parameters of the design and construction of a transformer—or of practically any other unit of electronic equipment or transducers (pickups, speakers, microphones, etc.)—engineers make use of equivalent circuits. By this means, the performance characteristics can be determined with a fair degree of accuracy throughout the entire audio spectrum, and corrections may be applied to improve the product.

Equivalent circuits for transformers usually ignore the step-up or step-down ratio of the winding, with the assumption that this job is done perfectly—which is practically the case. Thus it is possible to draw a circuit which has all of the characteristics of a transformer except that of voltage raising or lowering, and to assume that the output voltage is equal to the input voltage, modified by the characteristics of the transformer itself, multiplied by the step-up or step-down ratio of the number of turns. In doing this, all of the qualities of the secondary winding are "referred" to the primary.

If a capacitor of a certain value is connected across the primary of a transformer, it will have a given effect upon the performance. If the same capacitor is connected across the secondary, its effect will be multiplied by the impedance ratio of the windings—the impedance ratio being the square of the turns ratio. In a similar manner, all of the characteristics of the secondary may be referred to the primary for ease in making the calculations. This referral is much like converting dimensions into the same terms—if we are speaking of two packages on a comparative basis, we do not say that one weighs sixteen ounces and the other weighs two pounds, but instead, we say that one weighs sixteen ounces and the other thirty-two, so that the weights can be compared readily.

The important characteristics of a transformer are: core loss, which means the energy consumed in magnetizing and demagnetizing the core with each cycle; winding resistance, or the losses due to the actual resistance of the copper wire making up the windings; interwinding capacitance, or the effect of capacitance between adjacent layers of the primary and secondary windings; capacitance to ground or

core, which affects high-frequency performance; and leakage reactance, which is a factor based on the degree of coupling between the two windings—in effect, a measure of the lack of perfection in transformer action.

While the performance of a transformer may be considered perfect (almost) at mid-frequencies, the performance at the high and low frequencies is what makes the important difference between a good unit and a poor one. In order to have good low-frequency response, the primary must have a high value of inductance. This is likely to increase winding resistance appreciably, and so makes a large transformer necessary. A high step-up ratio makes a greater number of turns on the secondary, with greater capacitance to ground, which reduces high-frequency response unless exceptional care is taken in the construction. And, unless windings are interleaved, it is probable that the leakage inductance will be high, also affecting high-frequency response adversely. Leakage inductance appears as a series inductance in the secondary circuit—having little effect upon lows but decreasing the highs appreciably.

This article is the first of a series of three which will deal with transformers, and particularly with their uses in audio applications, since power transformers have fewer problems of design—mainly because they work at only one frequency.


Pickup Tracking Error

Phonograph performance is affected by a large number of factors—not the least of which is the imperfect position of the stylus with respect to the groove. Almost without exception, phonograph records are cut by a stylus which moves laterally along a radius of the disc, thus remaining perfectly tangent to the groove at all times. However, in practically no instance does the pickup move along the same radial line, but instead it moves along the arc of a circle which is planned to lie as close to a radius as possible. If the pickup arm were infinite in length, the stylus would follow a straight line, but this is certainly not practical for the average phonograph. Several patents have been issued over the past twenty years or so on devices which would cause the pickup to track on a straight line, but most of these involved highly complicated structures which would undoubtedly introduce more troubles than the one they would cure.

An inspection of the geometry of the pickup will show that when a straight arm is used the axis of the arm is not tangent to the groove at more than one place, and

[Continued on page 49]

20° BELOW ZERO! Climate does not cripple THE MAURER 16mm.

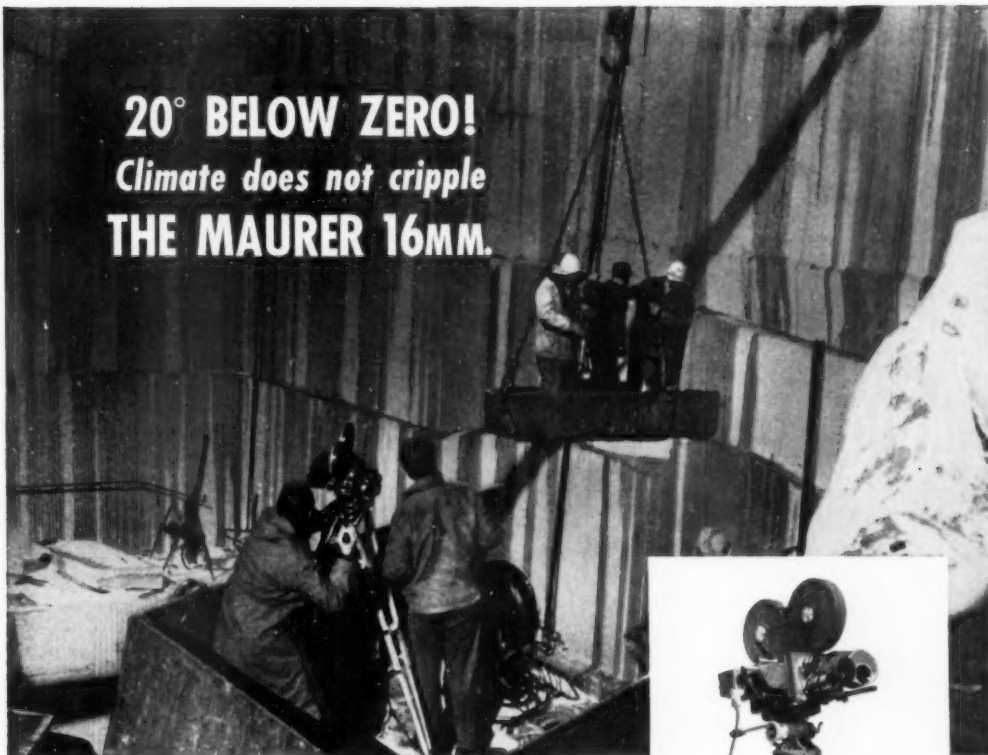

This remarkable photo shows the Maurer 16mm. Professional Camera shooting a scene at twenty degrees below zero... one hundred and fifty feet down in a marble quarry!

But that Maurer is getting perfect pictures... it was designed not to "freeze up." The Maurer 16's *dependability* under all conditions is only one of many reasons why the nation's top professionals choose this fine camera for all phases of professional motion picture production.

Hair-line accuracy... precise high-power focusing... the 235° dissolving shutter... and many special exclusive features all add up to finer motion pictures with the Maurer 16mm. Top results mean economical results too!


Write us for more information about how the Maurer 16mm. can answer your motion picture production problems.

maurer

means finer motion pictures!



THE MAURER 16mm. designed specifically for professional use, equipped with precision high-power focusing and view-finder. Standard equipment includes: 235° dissolving shutter, automatic fade control, view-finder, sunshade and filter holder, one 400-foot gear-driven film magazine, one 60-cycle 115-volt synchronous motor, one 8-frame handcrank, power cable and a lightweight carrying case.



THE 16mm. SOUND-ON-FILM RECORDING SYSTEM combines the highest fidelity in 16mm. recording practice with wide flexibility and extreme simplicity of operation.



THE MODEL F PRIME RECORDING OPTICAL SYSTEM AND GALVANOMETER a complete light modulating unit for recording sound photographically upon standard film, requires no special servicing or spare parts (other than recording lamp).

J. A. MAURER, INC.

37-01 31st Street, Long Island City 1, New York
1107 South Robertson Blvd., Los Angeles 35, California

**16mm
maurer**

CABLE ADDRESS:
JAMAURER

What
kind
of
men?



What kind of men are the 2500 scientists and engineers of Bell Telephone Laboratories?

They are men of many types, yet they work well together, for all have good minds as a foundation, years of study in the fundamentals of their science and in the methods of research and design. Vital, too, is their teamwork — for without the co-operation of many individuals the products of research and development could never be perfected.

Above all else these men have “the spirit to adventure, the wit to question, and the wisdom to accept and use.”

Such men can develop the world's finest telephone systems — and have done so.

Perhaps there is a place among them for you. Write the Employment Director, Bell Telephone Laboratories, New York 14.



BELL TELEPHONE LABORATORIES

• EXPLORING AND INVENTING, DEVISING AND PERFECTING FOR CONTINUED IMPROVEMENTS AND ECONOMIES IN TELEPHONE SERVICE

Pickup Tracking Error

EDGAR M. VILLCHUR*

Misconceptions on the subject of tracking error are many, and recent articles have been sparse. The author presents a lucid analysis of tracking error and its effects upon distortion in phonograph reproduction.

THE PROBLEM of keeping a phonograph pickup tangent to the record grooves at different radii has been with us ever since manufacturers abandoned the cylinder player, a device in which the pivot of the overhead pickup was driven across the record by a feed screw. With disc records, tracking error constitutes a problem, and the reasons for it and the principles involved in its solution are here discussed.


Some years ago the most serious effect of tracking error was considered to be undue wear of the record. The tip of a steel needle loses its spherical shape after a few revolutions of the turntable and is ground to the form of a wedge, with its long axis lying along the groove. If the pickup then turns with respect to the groove due to change of tracking angle the needle tip is re-ground and abrasion of the groove walls is increased. There has been some disagreement as to the extent of this increase, but in any case a jewel stylus maintains its shape better, and turning the spherical tip in the groove does less harm. Record wear is therefore a minor matter in tracking considerations when jewel styli are used. Tone arm design even makes a degree of sacrifice in this direction (side thrust is allowed to increase) for the sake of other benefits.

The main result of tracking error in modern equipment is that the vibration axis of the pickup is turned from the groove, generating distortion. If the line from stylus to arm pivot is at an angle to the groove tangent, the stylus is also pressed against one groove wall more than the other. Extreme angles will cause an increase in record wear and in the chances of groove jumping. None of these effects was very noticeable on older phonographs because pickups were quite heavy and tracking distortion was relatively small compared to other types of distortion.

Side Thrust

Figure 1 shows the forces acting on the stylus under two conditions of tracking error. The stylus at rest is subject only to the weight of the pickup and support of the groove, and will always be seated correctly, no matter what the tracking angle. When the groove is moved past the stylus, however, the tip is subjected to two additional forces equal

Fig. 1. Force components of side thrust on stylus.

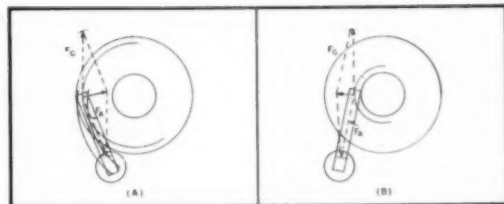

to each other in magnitude, the frictional force F_g of the groove which tries to drag the stylus with it in a tangential direction, and the force resisting F_f in a direction toward the pivot, shown as F_s . When the frictional pull of the groove and the resistance of the arm do not lie along the same line, a resultant side force is exerted on the stylus independent of groove modulation, either towards the center of the record, as at (A) in Fig. 1 or away from the center, as at (B). The slope of the groove walls directs some of this force upward, and so if pressure against the sidewall is great enough the stylus will climb towards and possibly over the top of the wall.

The force resisting frictional drag of the groove is applied along the straight line from arm pivot to stylus, coupled from the pivot by means of the arm. Since the arm is rigid the direction of the line of force is formed by the stylus and pivot independent of the particular shape of the arm. The tendency of the stylus to ride up on the walls of the groove cannot, therefore, be made less by the use of a bent arm.

Contrary to occasional popular opinion this tendency is actually somewhat greater in offset arms, not because of their shape but because of the way in which they must be mounted. The imaginary line connecting the pivot and stylus of an offset arm makes a larger angle with the groove tangent than the corresponding line of a properly mounted straight arm. The greater the angle of offset the worse the offending nature of the pivot location in this respect, and the more the side thrust on the stylus. This is one of the reasons that studio-type offset arms are long, requiring only a small angle, even though an eight-inch arm with a larger angle may be designed to have almost negligible tracking error. The increased side thrust of bent arms is accepted as a far lesser evil than

tracking error. Since the side thrust of bent arms is always directed toward the center of the record, a moderate amount serves to overcome frictional resistance of the arm pivot.

Tracking Error Distortion

It is evident that an arm which maintains tangency well due to its offset design may actually produce more side thrust than an arm with greater tracking error, and distortion generated by non-tangency cannot be laid primarily at the door of improper seating of the stylus in the groove. Even if the arm holds the pickup at an angle to the groove tangent, the stylus may follow the groove convolutions without error. Stylus motion in an oblique, pickup however, will not be perpendicular to the groove, and instantaneous stylus displacement relative to the longitudinal axis of the pickup will not correspond to the recorded signal. Figure 2 shows consecutive positions of styli in two identically modulated grooves. In (A) there is no tracking error. Displacement of the stylus relative to the pickup, plotted against time, is a copy of the groove's wave form. In (B), with the stylus tip still following the groove, a tracking error of α results in a distorted shape of the same graph. As can be seen, maximum stylus displacement relative to the center line of the pickup occurs first too soon and then too late within the recorded period. Maximum stylus displacement across the pickup is also greater in amplitude than maximum displacement relative to the center line of the groove.

This effect is aggravated when groove modulations are heavier or closer together. The distortion generated is therefore inversely proportional to groove radius and turntable r.p.m., and directly proportional to the amplitude and frequency of the recorded sound.

Another source of possible tracking

* 136-03 70th Road, Flushing 67, N. Y.

distortion is the offset angle of the cartridge in bent arms¹. The force trying to carry the stylus away from the arm pivot tends to turn a swivel-type stylus assembly to face the pivot. But the cartridge held by a bent arm cannot, by the nature of its mounting, ever face the pivot. Thus the lateral position of the stylus following an unmodulated groove is not along the center line of the cartridge, and the stylus at lateral rest is not at the center of its normal play. Figure 3 illustrates this angular bias in a pickup and in an analogous system made up of two linked rods.

The amount of bias is directly proportional to the compliance of the coupling between stylus and pickup and to the angle of offset of the cartridge. It will become significant only if the moving element of the cartridge is driven into a non-linear region of operation, in which case asymmetrical or even-harmonic distortion is generated. It is far less consequence than the first type of tracking distortion, or offset arm design would offer no advantage, but it constitutes a second reason for making offset arms as long as possible and with a small angle.

Arm Design and Mounting

The approximate solution to the tracking problem is to use a tone arm as long as can be afforded, to locate the pivot in that position which produces the least variation of angle between arm and groove (ignoring the absolute values of the angles) and to then offset the pickup from the arm to bring the center line of the cartridge or element to tangency with the grooves at selected radii. The most popular misconception about the offset arm is the belief that it is the bend in the arm which produces the reduction in tracking angle variation, due to a "virtual pivot" or other fancied cause. The variation in groove-pickup angle for any arm of given length, mounted

at a specified point, must be the same whether the arm is straight, bent, or shaped like one of the snakes of an ancient Egyptian head-dress. This becomes clear if we think of a bent arm forming a rigid triangle with the line from pivot to stylus. The angle between this line and grooves of different radii, representing the tracking of a straight arm, must vary exactly the same amount as the angle between the grooves and the offset pickup. Improvement in tracking can only result from the shift in pivot mounting which the offset allows us to make.

It is possible to choose a mounting point for a given arm such that the arc swept across the record intersects the grooves with minimum variation of angle. Figure 4 shows the arcs produced by the same arm from different pivots. Considering only the variation in angle at which the arc encounters each groove it will be seen that arc 3 has the best tracking. The graph of tracking angle versus radius indicates that arcs 1 and 2 decrease their angles of intersection with each groove as they approach the center, while arc 3, representing a position of the pivot which "overhangs" the stylus past the turntable spindle, decreases its intersecting angle only up to a minimum point and then increases the angle again as further progress toward the center is made. The fact that the intersecting angle goes through a minimum point means that for some angle values before the minimum there will be an equal value after the minimum.

It would not be feasible to mount a straight arm to sweep arc 3, because although the variation in angle is small the actual angle at which the pickup would be held is far from the tangent. A positional bias is therefore applied to the pickup element by offsetting it β . We have already seen that the variation in intersecting angle is independent of arm shape, and so we will not lose the advantage of minimum variation by this offset, while we gain correction by this method for the absolute value about which the tracking angle varies.

Zero tracking error may be achieved at two points: at the groove for which the offset makes a perfect correction, and at its mate on the other side of minimum. The points of zero tracking error (determined by the angle of offset) and the groove radius at which the minimum intersection angle occurs (determined by the pivot mounting) are adjusted for optimum performance. These adjustments are concerned with keeping $\frac{\alpha}{r}$ rather than α alone as small as possible.

Tracking Equations

The tracking equations of most interest are those which furnish information on optimum offset angle, correct pivot mounting for a given arm, and the tracking error and distortion of a given system. B. B. Bauer² has derived general forms of some of the foregoing equations in a clear and interesting article to which the reader is referred. The equations below apply only to twelve-inch records, and have had small decimals of no significance dropped.

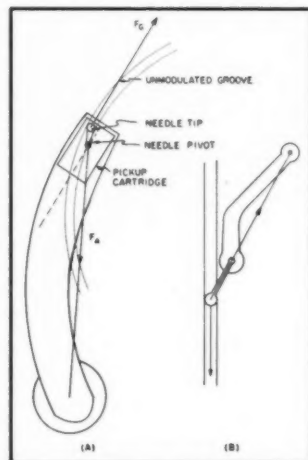


Fig. 3. (A) Pickup bias due to cartridge offset, and (B) analogous mechanical system illustrating pickup bias.

Optimum offset angle β for an arm of length l inches (pivot to stylus tip) is:

$$\beta = \frac{179}{l} \text{ degrees}$$

The overhang D (the distance from spindle to stylus) of such an arm, or of an arm with a larger angle of offset (some designs have considered minimum tracking error without reference

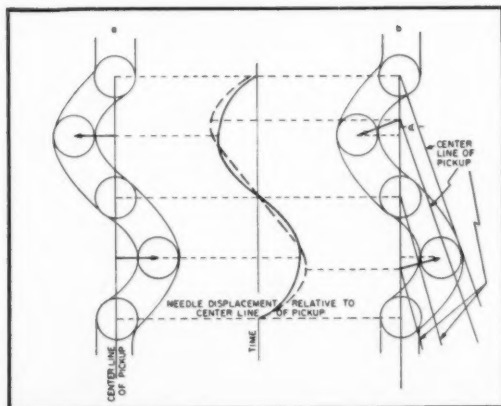


Fig. 2. Distortion caused by tracking error. Arrows indicate maximum stylus displacement relative to pickup.

² B. B. Bauer, "Tracking angle in phonograph pickups," *Electronics*, March 1945, p. 110.

to the need for better tracking at the inner grooves) should be:

$$D = 9 \left[\frac{\beta}{57.3} - \frac{1.8}{l} \right] \left[\sqrt{1 + \frac{(\beta/57.3)^2}{(\beta/57.3 - 1.8/l)^2}} + 1 \right] \text{ inches}$$

and when β is equal to the optimum $\left[\frac{179}{l} \right]$ deg., the expression simplifies to:

$$D = 4.2/l$$

The equations for D are inaccurate for arms whose angle of offset is less than the optimum β . For arms in which

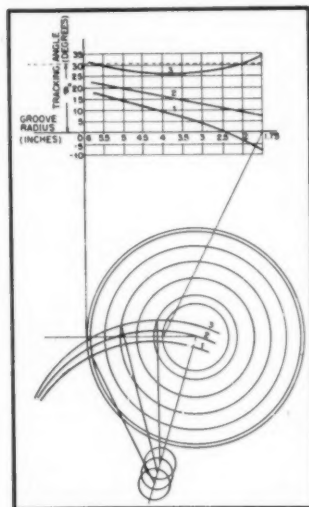


Fig. 4. Tracking angle variation of the same arm at different pivot mountings.³

β is between $2/3$ of optimum and optimum we must change the expression to:

$$D = 2.9 \left[\frac{5.8}{l} - \frac{\beta}{57.3} \right] \left[\sqrt{1 + \frac{(\beta/57.3)^2}{(5.8/l - \beta/57.3)^2}} - 1 \right]$$

And for arms whose offset angle is less than $2/3$ of optimum we use:


$$D = \frac{.013\beta - \frac{1}{l}}{.36}$$

The equation for a straight arm, with β equal to zero, becomes:

$$D = -\frac{1}{.36l}$$

³ Values from Ralph P. Glover, "A record saving pickup," *Electronics* Feb. 1937, p. 31.

Fig. 5. Basic oblique triangle used in determining tracking characteristics.

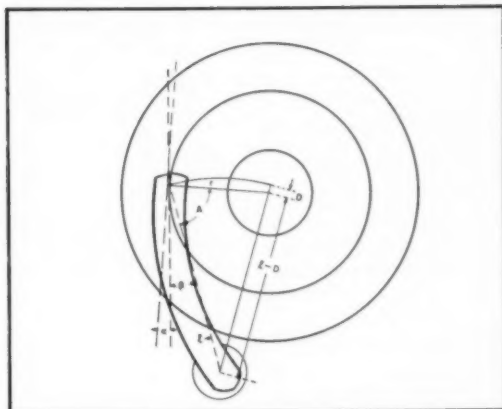

As would be expected from the tracking curves of Fig. 4 optimum mounting of the straight arm requires that the needle be underhung by an amount which places the point of perfect tracking at the inner grooves.

The tracking error α of a given system at a groove of radius r is equal to:

$$\alpha = \sin^{-1} \left[\frac{r^2 + 2lD - D^2}{2lr} \right] - \beta$$

The derivation is simple and interesting enough to be included in the appendix. Maximum α over the record may be found by checking at the three radius values at which maximum error could occur: the inner groove, the outer groove, and the groove at which the angle of intersection with the arc of the tone arm reaches a minimum and begins to increase again. Tracking error at the first two points is found by using 1.75 inches and 5.75 inches, respectively, for the value of r . The radius at the third point can be solved for after setting the partial derivative $\frac{\partial \alpha}{\partial r}$ equal to zero, and is equal to:

$$r_s = \sqrt{D(2l - D)}$$

The main tracking distortion is second harmonic. On a basis of stylus velocity change, the per cent distortion is:

$$H = \left[\frac{1.05 f A \alpha}{V r} \times 100 \right] \text{ per cent}$$

where f = frequency of the signal in cps
 A = amplitude of maximum groove modulation in inches (.004 inches at 250 cps would be typical of 78 r.p.m. commercial records containing loud passages.)

α = tracking error in degrees

V = r.p.m. of turntable

r = radius of groove

The tracking distortion produced in a standard commercial pressing by a properly mounted 8-inch straight arm (17-deg. maximum error at the outer grooves, 8-deg. maximum at the inner) may be expected to be of the order of 6 per cent on loud passages. A correctly designed offset tone arm of the same length will reduce the tracking error and the distortion by a factor of six.

APPENDIX

From the trigonometric formula for oblique triangles (see Fig. 5):

$$(l - D)^2 = l^2 + r^2 - 2lr \cos A$$

$$\angle A = \cos^{-1} \left[\frac{r^2 + 2lD - D^2}{2lr} \right]$$

$$\angle A + \angle \beta + \angle \alpha = 90^\circ$$

$$\alpha = (90^\circ - A) - \beta$$

$$\alpha = \sin^{-1} \left[\frac{r^2 + 2lD - D^2}{2lr} \right] - \beta$$

The ability of a pickup and tone arm to maintain good stylus-groove contact is often referred to as tracking capability, and the weight required to keep the stylus properly seated is called tracking pressure. These expressions would seem to have something to do with pickup tangency, but they do not. Stylus seating at normal tracking errors is almost independent of tangency. The term "tracking" is used in two different ways in relation to tone arms: it has a literal meaning which relates to seating of the stylus in the track of the groove; and a technical or mathematical one, which refers to maintenance of a constant tangency relationship between two variables, the pickup axis and the groove at the point of stylus contact. In the latter application the word is used in the same way as when it describes the behavior of one section of a variable capacitor, which "tracks" or keeps a constant capacitance relationship to another section with which it is ganged.

How Good is an Audio Transformer?

N. H. CROWHURST*

A thorough understanding of transformers is essential to the selection of the proper type for any particular application. The fundamentals are here presented by the author to introduce the series on one of the most important components in high-quality audio equipment.

THERE WAS A TIME when audio transformers were specified simply by turns ratio. An interstage transformer would be designated, according to ratio, e.g., 3:1 or 5:1. But one component would give much better performance, although having the same turns ratio as another. The modern transformer manufacturer knows that there is far more to designing a good transformer than just putting windings on a core so as to have the correct turns ratio. Each design must in fact be suited for the particular job in hand. To help the prospective user, the component is generally specified by the circuit for which it is intended, e.g., "10,000-ohm plate to single grid," together with some statement of frequency range. This is much more informative, but a still further and more detailed understanding of audio transformers will enable them to be used to best advantage in every application.

Any audio transformer is essentially a matching device, but no transformer is a perfect matching device because it introduces its own losses and defects. It is the designer's job to see that these losses and defects are kept to suitable proportions. If he has done a good job, then the user can get the best performance from the component by following the manufacturer's recommendations as to circuit values. But it would not be economic to design a different transformer to suit every possible application or circuit, so a standardized design often has to cover a range of uses. A perfectly good transformer, connected into a circuit unsuited for it, will give poor results, but correct understanding of the problem can help rectify these deficiencies.

How Big Must it Be?

A popular fallacy has been that audio transformers always follow the principle "the bigger the better." Sometimes size is essential to quality, but for other applications the smaller component is the better one.

All modern transformer core materials have a well defined saturation density. Magnetization above it will considerably distort the current waveform, and the distortion will reflect into the

circuit. The saturation density will correspond to different voltage levels at different frequencies, so the handling capacity of a transformer depends on the frequency considered. A winding that will accept 5 volts at 60 cps before distorting will accept 10 volts at 120 cps.

Applying this fact to audio power transformers, a component rated to deliver 10 watts over a frequency range down to 60 cps will deliver considerably more power if the low-frequency cut-off is raised to, say, 240 cps. Conversely, a smaller transformer may be used for the same power rating if a higher cut-off is employed. In practice, the fact that only signals of low level are needed at the low-frequency end of the audio spectrum enables smaller transformers to be employed than would be possible if full output were required down to, say, 60 cps.

Another factor that affects size is the presence or otherwise of d.c. polarizing. Where plate current passes through one winding (not in push-pull), the core becomes polarized. To minimize this polarization, a gap is left in the core by the manufacturer, according to the intended current. Polarization reduces the allowable a.c. magnetization, but the gap in the core reduces the primary inductance unless the turns are increased. So to achieve suitable primary inductance and satisfactory a.c. magnetization limits, without excessive insertion loss, the presence of polarizing current requires more turns on a larger core size.

For input transformers—line to grid, or microphone to grid—size is seldom an advantage, the best transformers designed being of small size. For interstage transformers, where appreciable voltage swing is required, a slightly larger transformer may be necessary.




Fig. 1. Equivalent circuit of audio transformer.
 C_1 = primary capacitance
 C_2 = secondary capacitance
 C_3 = interwinding capacitance
 L_1 = primary inductance
 L_2 = secondary inductance
 r_1 = primary resistance
 r_2 = secondary resistance
 R_k = core loss referred to primary

For driver transformers, where power must be delivered to the grid circuit, considerably larger sizes are required.

Its Electrical Specification

The transformer's electrical properties have a direct bearing on its performance, but the user will not necessarily be bothered with them directly. His concern is with the performance of the finished article. The principal properties are shown for reference at Fig. 1, which will assist in understanding the behavior of the transformer under different conditions, and what part each contributes. This is one way of representing the equivalent circuit of any audio transformer. For convenience, the fact that the transformer provides a step-up or step-down is not shown in the diagram. This action of the transformer may be regarded as perfect, its imperfections being presented in the circuit values of Fig. 1. The legend under the diagram explains what each symbol represents.

There are four elements shown as shunting the transmitted signal—primary and secondary winding capacitance, primary inductance, and core loss referred to the primary.

There are four elements shown as in series with signal transmission—primary and secondary winding resistance,




Fig. 2. Equivalent circuit for low-frequency cut-off, in a direct-coupled a.f. transformer. (A) Complete arrangement: R_1 = primary source impedance; R_2 = secondary load impedance. (B) Simplified equivalent of (A): R = parallel combination of R_1 , R_2 , and R_k .

leakage inductance, and interwinding capacitance.

All these circuit elements must be referred to one winding when considering their effect. If the primary is the chosen reference winding, then elements actually due to the secondary winding or its associated circuit must be "referred" in value by a factor of the turns ratio squared. Suppose the ratio is 3:1 step-up, then secondary winding resistance is divided by 9 and its capacitance

*82, Canterbury Grove, London, S.E. 27, England.

multiplied by 9 in referring to the primary. Usually the "referred" winding resistances of both windings are of the same order, but the referred winding capacitance of the high winding is much larger than that of the low one (about 9 times for 3:1 ratio). Hence the effect of the low-winding capacitance can often be ignored, only that of the high one being taken into account.

Insertion Loss

At a middle frequency, the shunt reactances will be high enough to exercise negligible effect, while the series reactance of L_s will be low enough to ignore, so the transformer is virtually a "T" resistor network, the attenuation of which can be calculated with reference to external circuit values—also usually resistances only—at mid-frequency. This attenuation, essentially a measure of power loss, is known as the insertion loss of the transformer.

For input and interstage transformers, where voltage transfer is the important feature, insertion loss is not generally given serious consideration. But for driver and output transformers, where insertion loss means valuable watts are lost, it must be considered. Insertion loss may be expressed in db, when the fractional power ratio corresponding to the db figure gives the proportion of input power reaching the output, or it may be expressed directly as a percentage. For example an insertion loss of 1 db represents an efficiency of approximately 80 per cent.

For a given transformer size, correctly designed, the ratio of r_1 and r_2 to R_p is fixed by the geometry of the component. Variation of turns and wire





Fig. 4 (left). Equivalent circuit for low-frequency cut-off in a parallel-fed a.f. transformer: C_c = coupling capacitor. Fig. 5 (right). Rearrangement of Fig. 4 to show it as a resonant circuit.

gauge to suit, varies winding resistance and referred core-loss shunt in the same proportion. Thus a winding with too few turns results in low core-loss shunt, while too many turns produces excessive winding resistance. Conversely, from the user's viewpoint, connecting a transformer to circuits of lower impedance than design values introduces high series loss due to winding resistance, while connection to higher impedances results in serious shunt losses due to core magnetization.

In generally, a variation of impedance results in a deficiency in frequency response as well, and the choice of the number of turns in design must be a compromise to achieve good response to both low and high ends of the spectrum.

At low frequencies, the effect of L_s , C_s , C_1 , and C_2 is negligible, but that of

Fig. 3. Low-frequency cut-off attenuation characteristic, 6 db per octave.

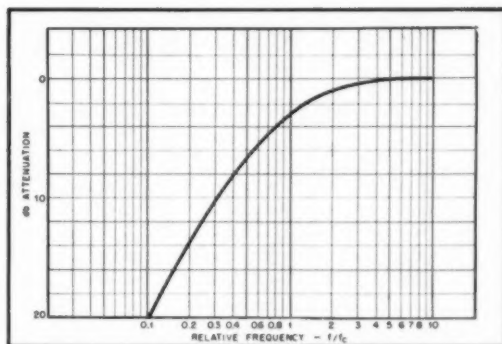

inductance L_p will become appreciable. For the purpose of comparative response, the values of winding resistances r_1 and r_2 can generally be ignored as small compared to the circuit resistances R_1 and R_2 to which the transformer is connected. Thus the circuit can be redrawn as at Fig. 2 from the viewpoint of relative l.f. response. At (A) the relevant values are shown, R_1 being the source impedance—i.e., the plate resistance of the tube if the transformer is connected in a plate circuit:




Fig. 6 (left). Equivalent circuit for high-frequency cut-off in a step-up transformer, and Fig. 7 (right), in a step-down transformer.

R_2 is the secondary load resistance, if any, referred by turns ratio squared to the primary side. For example, a shunt resistor of 1 megohm on the secondary of a 5:1 step-up will give a referred R_2 of 1 megohm divided by 5^2 or 25, which is 40,000 ohms.

The shunting effect of L_p must be considered relative to the parallel result of R_1 , R_2 and R_p . Thus (B) in Fig. 2 shows a simplified theoretical form of the circuit, where R is the resistance of R_1 , R_2 and R_p in parallel. This circuit produces a simple 6 db/octave l.f. cut-off, of the type shown at Fig. 3, in which the 3-db point is the frequency where the reactance of L_p is equal to R . Thus the cut-off frequency can be modified by changing either L_p or R . As L_p and R_p are fixed by the transformer, the remaining possibilities for adjusting l.f. cut-off are R_1 and R_2 . Reduction of the effective parallel resistance of these two will lower the l.f. cut-off, extending the frequency range.

With a direct-coupled transformer, where the core is polarized, the core is gapped so that the highest possible inductance is achieved when the current for which it is designed passes through the winding. It is wasteful to work the

transformer at a current differing appreciably from this value.

A direct-coupled transformer operating in a push-pull plate circuit does not have its core polarized, so a smaller component can be used, and the circuit of Fig. 2 can be applied, taking care that all impedances are referred to either the whole, or half, of the primary winding, correctly. However, the inductance varies widely with both frequency and level, so the response shown at Fig. 3 will not be applicable, but the same principle for adjusting l.f. cut-off applies.

Distortion is closely associated with l.f. response because it appears most strongly at this end. Steps that improve l.f. response also reduce distortion due to harmonics in the magnetizing current.

Sometimes transformers are parallel fed, to avoid passing the plate current through the primary winding. Since a coupling capacitor is then necessary, its reactance also becomes effective at low frequencies, so the circuit for l.f. response takes the form shown at Fig. 4. Here R_1 is the effective resistance given by the plate resistance of the tube and its coupling resistor in parallel; R_2 , as before, is the secondary load resistance, if any, referred to the primary. This circuit is in the form of a resonant circuit, seen more clearly as redrawn at Fig. 5, where R_1 is in series with the resonant components C_c and L_p , and the resistances R_p and R_2 are in shunt. For this reason, larger values of R_1 or smaller values of R_2 increase the damping (or reduce the Q) of the resonant circuit.

Less-than-critical damping results in a l.f. peak in the vicinity of cut-off. Critical, or more-than-critical, damping, eliminates any tendency to peak. Choice of suitable values for R_1 , R_2 , and C_c can result in best possible operation of the transformer in a circuit, as will be shown in detail in following articles.

Response at High Frequencies

At high frequencies the effect of L_p and C_c if used, will be negligible, and where any appreciable transformation ratio is employed, one of the winding capacitances may usually be neglected. Thus Fig. 6 shows the h.f. circuit equivalent for a step-up transformer, while

[Continued on page 55]

Design and Construction of Horn-type Loudspeakers

WAYNE B. DENNY*

Part I. In the never ending search for good clean bass, builders are turning more and more to the exponential horn—not admirably suited to furniture designs. The two presented by the author should be pleasing, both acoustically and aesthetically.

NUMEROUS REQUESTS for information about a speaker described by the writer in a previous article¹ have indicated that there are many audio enthusiasts who would like to construct horn speakers for their own use but who hesitate to do so without a better understanding of the theoretical and practical considerations which must be taken into account if results are to be satisfactory. Actually, there is nothing mysterious or esoteric about the design and construction of horn-type loudspeakers. The design of a satisfactory unit requires no great mathematical ability. The construction requires no more than a minimum of woodworking ability as far as acoustical performance is concerned. Of course, if appearance is a factor, the skills of a cabinetmaker may be employed for the visible part of the structure.

Theoretical Considerations

The acoustic horn can best be thought of as a transformer which accepts sound energy at its throat and delivers that same energy in somewhat different form at the mouth of the horn. The motion of the air in the constricted portion of the horn near the throat is characterized by

relatively high velocity and displacement amplitudes. However, the amount, or mass, of air which moves in this manner is small because the cross-sectional area of the horn is small near the throat. In contrast to the motion of the air in the throat, the motion of the air at the mouth of the horn is characterized by relatively low velocity and displacement amplitudes but the mass of air moving in this region is much larger. An analogy is often made between the acoustic horn and the impedance changing properties of an electrical transformer. Thus, for example, a step-up transformer accepts electrical energy at high current and low voltage and delivers that same energy (minus losses, of course) at low current and high voltage. The fundamental purpose of the acoustic horn is to match the impedance of the cone or diaphragm of the driving unit to the impedance of the space into which the sound is to be propagated.

This analogy may be carried a bit further. A good audio frequency transformer must be designed so that its frequency characteristic is essentially flat over the entire audible range. An ideal horn would have a similar frequency characteristic. Electrical transformers are now available which are nearly perfect in this respect but it is found that it is difficult to cover the entire audible spectrum with a single horn if total space occupied by the horn is to be kept within acceptable limits. The

physical shape is another factor which must be considered in the design of a practical horn. For these and other reasons it is convenient to use two or more separate horns, each one designed to cover but a portion of the audible spectrum.

The two design factors to be considered are shape and size. The shape will be considered first. Theory and experience² indicate that the most satisfactory shape is the so-called exponential horn. An exponential horn is best defined as one which obeys the following equation:

$$A_2 = A_1 e^{kx} \quad (1)$$

where A_1 = cross-sectional area at any point in the horn

A_2 = cross-sectional area at a distance x from the point where A_1 is measured. ($A_2 > A_1$)

k = flare constant

e = 2.718, the base of natural logarithms

The application of this equation is shown in Fig. 1.

For design purposes it is convenient to let $\frac{A_2}{A_1} = e^{kx} = 2$. From a table of exponentials

$$kx_d = 0.7 \quad (2)$$

In Eq. (2), x_d represents the particular increment of horn length in which the area doubles. For a true exponential horn the area doubles for this increment of length no matter what particular value is chosen for A_1 (or A_2).

The value chosen for x_d depends on the lowest frequency for which the horn is to be used. This is called the cut-off frequency, f_c , where

$$4xf_c = kc \quad (3)$$

where c = velocity of propagation of sound in air (about 13,200 inches/second)

After f_c is chosen, k may be determined from Eq. (3) and then x_d may be found from Eq. (2).

Example: Let $f_c = 40$ cps
Then $k = \frac{4\pi \times 40}{13,200} = .038$

*Lawrence E. Kinsler and Austin R. Frey, *Fundamentals of Acoustics*. New York: John Wiley and Sons, Inc., 1950. Ch. 11.

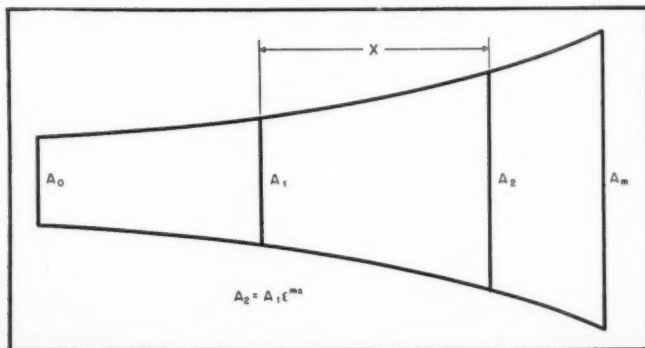


Fig. 1. The rate of expansion of an exponential horn, related to its mathematical expression.

Finally, $x_d = \frac{0.7}{0.038} = 18$ inches, approximately. Therefore the cross sectional area of an exponential horn should double every 18 inches in order to reproduce frequencies as low as 40 cps.

Other Considerations

There are three other considerations about horn shapes that should be mentioned. The first has to do with slight deviations from the exact rate of flare chosen. Experience indicates that for high-frequency horns (tweeters) the shape of the horn should conform as nearly as possible to the design criteria. Since high-frequency horns are small, this requirement presents no great problem. For low-frequency horns (woofers) considerable latitude seems permissible provided that the deviations are small compared with the shortest wavelengths to be used. Actually, there is some advantage in making a low-frequency horn with different rates of flare in different portions of its length. However, such deviations should be gradual and not abrupt.

Another factor in the shape of the horn is the effect of folds or bends. At the lower frequencies there is little difference between a straight horn and a folded horn because differences in path length in different parts of the horn are small compared to the wavelength. At higher frequencies, however, this is not true. Different portions of the wave travel different distances from the throat to the mouth of the horn and trouble occurs when this difference in path length approaches or exceeds one half wavelength. Under this condition it may be expected that there will be marked irregularities in the frequency response and in the directional characteristics of the horn. It is convenient, therefore, to use long, folded horns for the reproduction of low frequencies and to use short straight horns for the reproduction of the middle and higher frequencies. The situation can be summarized by saying that a folded horn has an upper limit to its frequency response as well as a low-frequency cut-off.

There are certain things that should be avoided in the design of folded horns even when they are to be used exclusively at low frequencies. In no case should the shape of the horn be favorable to the generation of standing waves, which are likely to occur whenever there is opportunity for sound waves to bounce back and forth between two parallel surfaces. This type of resonance can be avoided by taking into account the laws of reflection.

The last factor which should be considered about the shape of the horn is the shape of the cross-section. Horns need not be circular. They can be square, rectangular, or triangular. Different sections of the horn can have quite different cross-sections. However, the design should avoid abrupt changes; changes should be gradual throughout the length of the horn.

The question of horn size will be con-

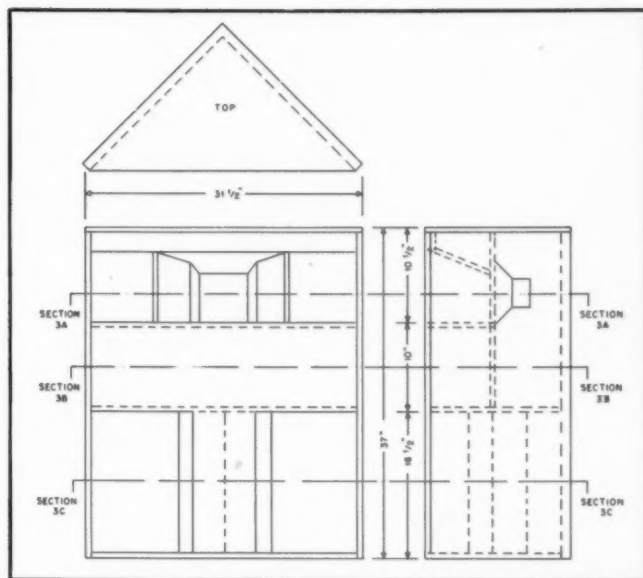


Fig. 2. Elevation of the corner speaker with duplex horn, with basic dimensions.

sidered next. The throat area, A_t , is determined primarily by the design of the motor which drives the horn. However, no attempt should be made to deliver very large amounts of acoustic power into a small throat area. Under such conditions the variations in air pressure may approach the ambient pressure of the air and serious distortion can result. This is because the elastic properties of air are non-linear except for small amplitudes. Fortunately, for most applications this is not a design limitation. It is convenient, therefore, to give the throat an area whose value is somewhat less than the area of the cone for horns driven by conventional dynamic reproducers. In the case of tweeters the throat area is determined by the size of the coupler attached to the high frequency driver.

Next, the mouth area, A_m , must be determined on the basis of the lowest frequency which it is desired to reproduce. It is erroneous to conclude from Eq. (3) that the lowest frequency depends solely on the rate of flare. This is because, strictly speaking, Eq. (3) applies only to horns which are infinitely long and which have, as a direct consequence, infinitely large mouth apertures. A short review of some elementary acoustical theory will show the importance of the size of the mouth area.

Rate of Flare

According to Eq. (3) the less the rate of flare, the lower is k . To take an extreme case, k might be made zero in the hope that the horn will respond to extremely low frequencies. Then, according to Eq. (1), the horn degenerates into a tube of uniform cross section. But, as every physics student knows, a

long open tube does not respond equally to all frequencies. Rather, it exhibits strong resonances at those frequencies for which the length of the tube is

$$l = n \left(\frac{\lambda}{2} \right)$$

where: $n = 1, 2, 3, 4$, etc.
and $\lambda = \text{the wavelength} = c/f$

Eq. (4) represents the condition for standing waves which are the resultant of two similar waves moving in opposite directions in the tube. The forward wave is the desired mode of propagation while the backward wave is produced by reflections which occur at the open end of the tube. In general, reflections occur wherever there exists a discontinuity in the air column unless the wavelength is very small compared with the diameter of the tube. For a uniform tube, reflections occur at the open end where the cross-sectional area changes abruptly from a small finite value to a large (quasi-infinite) value.

A long acoustic tube may be thought of as an acoustic transmission line with its own characteristic impedance. It is an elementary fact about finite transmission lines—that they are acoustic or electric—that reflections will occur at the end of the line unless the line is terminated in its own characteristic impedance. The difference between the tube and the horn is this: the impedance of the tube is constant throughout its length while the impedance of the horn (due to its "transformer action" which has already been mentioned) varies throughout its length. At certain frequencies where the wavelength is not small compared with the dimensions of the mouth, the horn will exhibit reflection.

[Continued on page 50]

Own Your Custom- Builder



Jay Carver* and Cliff Howard*

Even though you are not a cabinet maker, you can make simple and effective installations of radio and phonograph equipment at a fraction of what it would cost if you had someone else do it for you.

CUSTOM BUILDING—that is, the sometimes expensive correlation of audible and visible matter pleasant to any number of eyes and ears—is as complicated and time-consuming as one wishes to make it. When a tuner-amplifier-changer-speaker combination has torn a five-hundred-dollar hole in your entertainment budget, we assume you have used a goodly amount of care in your selection. If you plan to economize by compromising on the system housing, then you are about to become a custom builder. After all, cabinetry commensurate with the quality and quantity of these pieces of sound equipment is expensive—very expensive. Fir plywood, butt-jointed and nailed, say you, could never house this finest of equipment. Hardwoods are needed but rarely used. We like to assume good reasoning in the choice of equipment, better reason for the lack of hardwoods—money.

A fine sound system, properly contained in the woods and finishes of your choosing, is not an inexpensive item. It's not a casual addendum to your Saturday morning grocery list. Yet it is possible almost to halve the final cost of a good music reproduction unit by housing the sound system yourself in what can be an exceptionally attractive manner. We believe this cost-cutting applies to one-hundred- as well as one-thousand-dollar systems.

Manufacturers approve of this sort of thinking; it sells equipment. And most of these manufacturers devote a large swatch of their advertising dollar to the publishing of detailed instructions and templates for mounting that expensive tuner or amplifier in your living room. This data comes to you as part of the purchased item, so why not take advantage of it? Why not consider the actual size of this tuner and how best it could be mounted in a closet door or bookcase shelf or coffee table and ask a carpenter what the cost of a fronting panel for the tuner might be?

Is five dollars too much? Then buy a panel of fir plywood and cut it out yourself. This panel for the tuner can be less than a square foot of whatever wood you choose, and a matching finish isn't expensive. If your bookcases are painted, the cost can be measured in parts of dollars. Better still, the tuner might even come in a separate cabinet. No mounting expense required. Try a bookshelf for this sort of unit, using books as tuner-ends. The cabinet-mounted tuner becomes the center of that particular area of interest. And, it's accessible.

Any piece of sound equipment can be installed in such a manner. The acquisition of this equipment meant the acceptance of an entirely different concept of the mechanics for reproducing recorded and broadcast sound. So, having discovered the flexibility of your newest sound system, why not explore its decorative possibilities? These are just

* *The Electronic Workshop*, 351 Bleeker St., N. Y. 14, N. Y.



A simple but handsome cabinet such as the one shown in these two views suffices to hold the four basic elements of a home system—tuner, record player, amplifier, and speaker.

as many and as varied as the many and varied sound systems available today. Too, the ownership of this equipment hints at appreciation of arts other than music—design, literature, the dance. In other words, why sate but one sense? The more ear-pleasing your system, the better it should look. Using existing furniture or planning and building economical cabinetry, such eye-appeal is possible.

Think of the FM tuner you might have coveted. It can be placed a fair distance from its amplifier . . . in whatever setting you wish or can imagine. Would you like it facing your favorite listening spot from an attractive setting in a bookcase? If not this, have you thought of it being mounted facing upward in the top shelf of a low bookcase that might contain your record player and other controls? Or build it into that pine commode or that corner cabinet using as a dial panel the bottom of a drawer from one of those units. Try wherever possible to match in woods and finishes the eventual housing of your unit.

Tuners, should you have forgotten, require only a rectangular cutout for the dial and from one to seven $\frac{5}{8}$ -in. holes for the knobs. Most tuners are sold with attractive escutcheons to frame the dial cutout, so your lack of skill with a small saw doesn't show. Even if holes splinter, the knobs usually are large enough to cover your shortcomings as a cabinet-maker. The shelf within the tuner enclosure can be anything wooden—just locate it conveniently. Repairs someday may be needed.

Stringing connecting cables from the tuner to amplifier

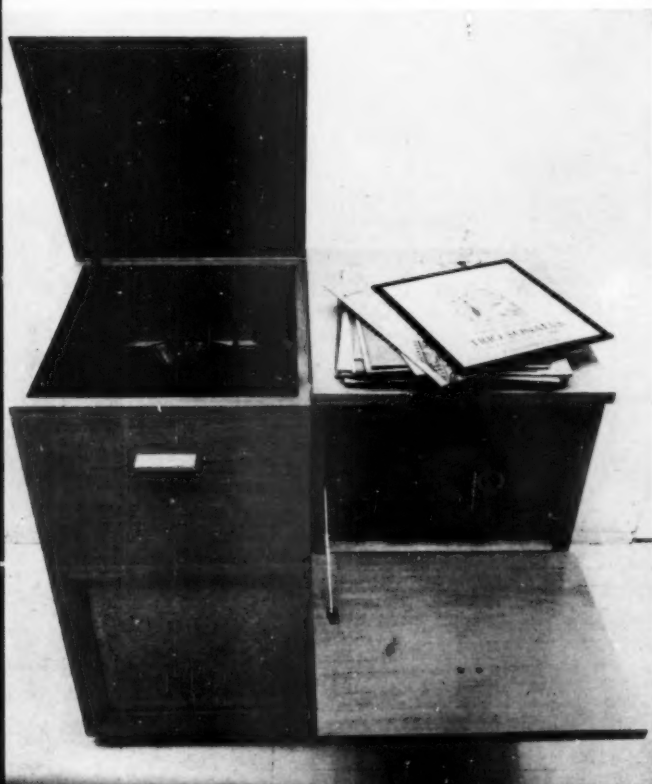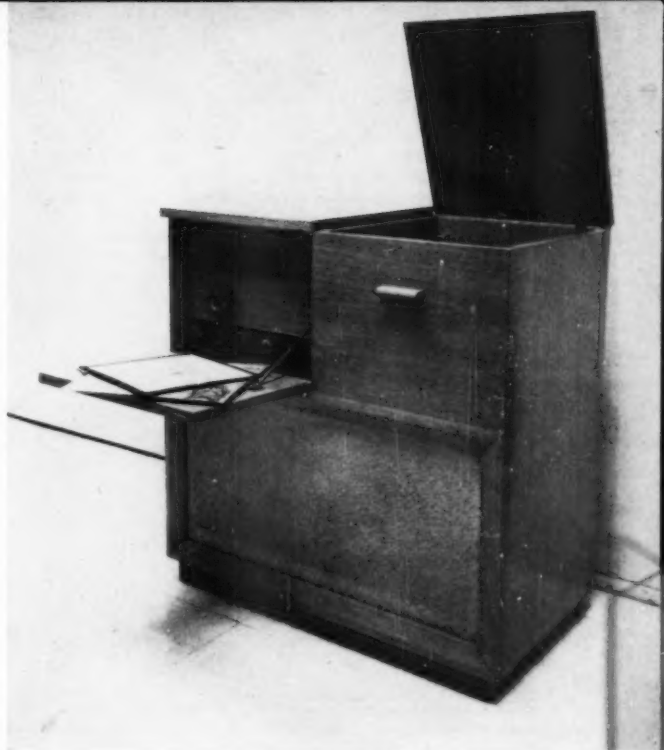

should be your neatest work. Care at this point of installation could save you many dollars later when a serviceman may be needed. Let him spend several hours undoing your complex installation when removing a faulty item, and you will lose money. Too, parts houses usually offer an *F.O.B.*

The Shop clause in the equipment guarantee. It means when a tuner or other unit acts up the repair guarantee becomes effective only when the unit is returned to the dealer (or manufacturer). Accessibility of these units within the installation means a saving to you of time, and, more important, money.

Tuner mountings, then, can be as different or practical or complex as you care to make them. Again, this applies to the entire system with the exception, perhaps, of the loudspeaker. On tuners, try the parts catalog again. This time consider the decorative possibilities of the many advertised tuners. Iconoclastic though this may seem, you'll notice that each unit differs from the next in a way that may prove the answer to your particular problem. Many of these differences are physical, their performance characteristics being almost identical. Why not use the one best suited to the way you intend to use it?

If your new amplifier has its own controls, remove the volume control from the tuner—hack saw will do the trick. Now there's only a tuning knob. The installation becomes more manageable with fewer knobs to confuse the eye. If the tuner hums while the record player is on, mount an unobtrusive on-off switch elsewhere on the control panel for the tuner.

Amplifiers present a somewhat different mounting problem. Inexpensive units with tone controls and selector switches on the same chassis are actually more difficult to place than an expensive amplifier with the same controls in a remote unit. The latter

might be used as just that without bothering to install it permanently. It's a compact unit, usually quite attractive. Mounted, it could show directly under or next to the tuner. All controls then are inches apart. If space is not available for the tuner and amplifier you want, and the amplifier just won't fit in the same enclosure as the tuner, place the amplifier back of the tuner chassis and use flexible shaft extenders. You'll have the amplifier controls next to the tuner, but only the depth of the enclosure, not the height, will be used. Think of the amplifier as the center of the system. Your tuner, record player unit, and loudspeaker find a junction in the amplifier. If it doesn't use a remote control unit, the controls will have to be accessible. All of which leave you with a cable-stringing problem.

We think it best to control the power sources for the tuner and record player from the control switch on the amplifier. None of these units can be used until the amplifier has been turned on. But, if the tuner and player are installed as remote pieces of cabinetry, this matter of cable-stringing can become messy. The tuner has three cables—antenna line, a.c. power cord, and audio output. The record player, lacking antenna, has the other two. Four times this amount of hookup line isn't easily hidden. Try connecting the a.c. cord from each component to the nearest wall outlet, and then use the smallest insulated cable available for the connection to the amplifier. (We use phono cable 1/16-in. in diameter; it hardly can be seen.)

For connecting the speaker case, use inconspicuous telephone hookup line, or, to hide it completely, try 300-ohm antenna line under the living room rug. It's flat and pretty sturdy.

With these units mounted in the same cabinet, however, problems other than neatness of wiring begin to show themselves, and, what's worse, begin to make themselves unpleasantly heard. If the mounting is a horizontal one (as on a bookcase shelf), remember that a magnetic cartridge too close to a transformer will hum. In such a case, install the

phonograph at the far left. Record players in such arrangements sometimes seem much the less practical devices than they might. Changer vibration (we call it rumble) is transmitted through the system, sometimes through lack of care in mounting the system. It's not an insurmountable problem. Foam rubber, placed under tuner and changer mounting boards, can sometimes remove this unmusical type of disturbance. Try the foam rubber underneath the speaker baffle, even though it's in another part of the room. If the amplifier must be located near the cartridge and there's hum, try re-loading the amplifier within its enclosure until you have found a placement causing the least hum.

Then there's a matter of heat. Did you know that some transformers are partially filled with pitch? It's only a stuffing around the working parts of the unit. If you don't provide adequate ventilation for your amplifier (or other units), you will soon realize this important fact of transformer life—expensively. Hot enough, the pitch will melt and pour out of the transformer. By then, the transformer has ceased to function and you need a repairman. Ventilating holes can be carefully cut, tastefully covered with metallic grillwork. Sometimes, and we've done it many times, the ventilating holes can be an integral part of the amplifier design.

On most amplifiers you will find an escutcheon plate inscribed with various legends. Remove it by taking off the knobs and the control knob nuts. Mount it on the outside of your new dial panel, or, if it lacks an esthetic appeal, buy decals from a radio parts house, applying whatever legends you feel necessary to operate the unit. On matters esthetic, incidentally, try a razor blade on the glass dial of your new tuner. If it's silk-screened, the sharp edge quickly removes any advertising and unnecessary tuning information on the dial. If the flocking behind the glass offends your critical eye—it's usually plum-colored—ordinary ink in a shade of your choosing will do the trick and will give your tuner dial the original touch you sought when you bought it.

Mounting the record player isn't too much of a problem unless space is critical. If a changer must be used, then remember that some domestic units require as little as thirteen inches in depth. Even this measurement extends beyond the depth of the average bookcase, and if such an installation is needed, here is one suggestion. Most changer companies sell wood and metal bases for their changers. Find a base for your changer, fix to the inside of a hinged front for one section of your bookcase. You will need no more than ten inches of depth and the average bookshelf offers more by one or two inches. Or mount the base on inexpensive metal slides anywhere in any piece of furniture offering the needed space.

And so to speakers. And, with our ideas, to fewer friends. We assume you have the speaker (or speaker system) best-suited to your budget-wise ear. We assume, too, that budget limitations will determine the eventual placing and housing of your speaker. And again we assume you have plumbed the many and varied speaker baffles for the buying and building. Assuming this much, we offer a practical, money-saving baffling idea—try a "tuned" baffle. You are not restricted to [Continued on page 57]



The basic four—a tuner, an amplifier, a record changer with the 45-r.p.m. spindle, and a choice of speakers—which comprise the home audio system.



the Jensen H-510

with acoustic lens*

*world's
finest
coaxial
speaker*

*world's
best
coaxial
value*

In cleanness and presence, in thrilling realism of reproduction, the H-510 is unsurpassed by any other coaxial regardless of cost.

With its acoustic lens for wide-angle dispersion of "highs", advanced type compression driver high frequency unit, and improved Diaplane low frequency radiator, the H-510 is truly an outstanding example of advanced electroacoustic design. Write today for descriptive literature.

* First loudspeaker to employ the acoustic lens.

Jensen Manufacturing Company
division of The Muter Company
export department at the factory

6601 S. Laramie, Chicago 38, Illinois BURTON BROWNE ADVERTISING

The Best British Records of 1950-1951

H. A. Hartley

WHEN THE LIST of Best British Records of 1949 was run in these pages in November 1950, it was prefaced by a few comments which are equally applicable to this compilation. In substance, therefore, the same comments are repeated here along with some new ones.

These records have been selected because they are well performed and well recorded, in this reviewer's opinion. It seems futile to recommend a technically-good recording if the musical interpretation is unsatisfactory, and an excellent performance badly recorded is a constant irritation, as well as a reminder of what might have been.

Catalog numbers are British ones, and some titles may be available with American labels. While record-shop experts should be able to give cross references, the performers and conductors indicated will probably provide the clue in most cases. Now for the new comments:

While it is recognized that the 78 record is almost a dead issue in America, the obvious thing was to prepare this list on the basis of giving first choice to the LP recording provided it was at least as good as a competitive recording on 78, and leave the 78 out of the list as being of little but academic interest. The list is thus considerably shortened, without impairing its usefulness. On the other hand, if the 78 recording was a better job than the LP edition of the same work (by a different company) then the LP was left out. This will explain why you will find some LP's omitted, even though you know they are in the catalog. The list is based on this writer's opinions, whether good or bad. At least you can be sure that the records were reviewed on first-class equipment which would show up any defects of recording.

Leaving equipment problems—all of which can be overcome—an amusing inconsistency in the aesthetic approach to one section of the musical repertoire was recently observed in two issues of *The Gramophone*. In August, one reviewer reported:

"Now Charles Mackerras . . . demonstrates by his brilliant rearrangement of Sullivan's tunes . . . that divorced from Gilbert's no-longer-funny words and those laboriously fossilised stage productions, the music actually benefits and can take on a fresh lease of life. . ."

In the November issue, another reviewer says:

"First of all I believe most firmly that the genius of the Savoy pair was Gilbert; anyone who takes the trouble to read the plays as plays will discover this if he cannot do so otherwise—for example, from the fact that Sullivan was no great shakes as a composer away from his colleague."

Obviously there is a certain emotional set-up which is quite likely to modify any opinion formed as to performance and recording—even before the needle is put in the first groove. Some excellent examples may have been missed because this reviewer does not like operas, with the exception of Die Fledermaus, Schwanda—etc., The Perfect Fool, and Gilbert and Sullivan. The particularly objectionable ones are Tristan and the Ring when the singing starts. Apart from such foibles, the list is believed to be reasonably complete.

The following contractions are used:

H.M.V.: His Master's Voice. **Col.:** Columbia (British). **Parlo.:** Parlophone. **Decca:** Decca (British) which may not be listed in the London catalog. **Lon.:** London (i.e. Decca available in America and listed in the London catalog). All H.M.V., Columbia, and Parlophone records are 78's. All London records are LP's. A Decca number preceded by * indicates LP; otherwise it is a 78. **L.P.O.:** London Philharmonic Orchestra. **L.S.O.:** London Symphony Orchestra. **R.P.O.:** Royal Philharmonic Orchestra. **Ph.O.:** Philharmonic Orchestra. **C.O.A.:** Concertgebouw Orchestra of Amsterdam. **V.P.O.:** Vienna Philharmonic Orchestra. **O.S.C.C.:** Orchestre de la Société des Concerts du Conservatoire de Paris. **P.O.:** Philharmonic Orchestra. **S.O.:** Symphony Orchestra. **acc.:** accompanied. The conductor's name is given in parentheses after the orchestra.


ORCHESTRAL

Auber	Overture: Fra Diavolo. Boston Pops O. (Fiedler)	H.M.V. C4010
Alfven	Midsummer Vigil (Swedish Rhapsody) Cincinnati S.O. (Johnson)	Lon. LLP406
Bach, J. S.	Brandenburg Concertos Nos. 1 & 5. Brandenburg Concertos Nos. 2 & 3. Brandenburg Concertos Nos. 4 & 6. all by Stuttgart Chamber O. (Münchinger).	Lon. LLP222
Balakirev	Suite No. 3 in D. Stuttgart C.O. (Münchinger).	Lon. LLP144
Bantock	Symphony in C. Ph.O. (von Karajan).	Lon. LP8147
Beethoven	Finale at the Fair. R.P.O. (Beecham).	Col. LX1323/8
Berlioz	Symphony No. 5, O.S.C.C. (Schuricht). Excerpts from Romeo & Juliet, and Royal Hunt & Storm. O.S.C.C. (Münch).	H.M.V. DB21145/8
Bizet	Carmen Suite & L'Arlésienne. L.P.O. (van Beinum).	Lon. LLP7
Borodin	Overture & Polovtsi March (Prince Igor) Ph.O. (Dobrowen).	Lon. LLP3
Brahms	Symphony No. 4. L.S.O. (Krips).	Lon. LLP179
Debussy	Images pour Orchestre. O.S.C.C. (Ansermet).	H.M.V. C3579/80
Dukas	La Mer. O. S. R. (Ansermet).	Lon. LLP208
Dvorak	L'Apprenti Sorcier. O.S.C.C. (Jorda).	Lon. LLP44
Grieg	Scherzo Capriccioso, Op. 66. Ph.O. (Kubelik).	Lon. LLP388
Holberg	Suite, Boyd Neel O. (Boyd Neel).	H.M.V. 7822/3
Ippolitov-Ivanov	Sigurd Jorsalfar. Cincinnati S. O. (Johnson).	Lon. LLP173
Mozart	Caucasian Sketches. O.S.C.C. (Desormiere).	Lon. LLP406
Ravel	Eine Kleine Nachtmusik. V.P.O. (Karajan).	Lon. LLP440
Rimsky-Korsakov	Symphony No. 36, K425. Danish State O. (Busch).	Col. LX1293/4
Rossini	Symphony No. 40, K550. L.P.O. (Kleiber).	H.M.V. DB20115/7
Rossini-Respighi	Symphony No. 41, K551. R.P.O. (Beecham).	Lon. LP889
Schubert	Ma Mere l'Oye. O.S.C.C. (Ansermet).	LX1337/40
Sibelius	Scheherazade, Op. 35. O.S.C.C. (Ansermet).	Lon. LLP388
Stravinsky	Overture: La Cambiale di Matrimonio. R.P.O. (Beecham).	Lon. LLP6
Strauss, R.	La Boutique Fantasque. L.S.O. (Ansermet).	Col. LX1458
Tchaikovsky	Symphony No. 8. (Unfinished). L.S.O. (Krips).	Lon. LLP274
	Symphony No. 6, Op. 104. R.P.O. (Beecham).	Lon. LP8209
	Petrouchka. Ballet suite. O.S.C.C. (Ansermet).	H.M.V. DB6640/2
	L'Oiseau de Feu. O.S.C.C. (Ansermet).	Lon. LLP130
	Also Spruch Zarathustra. V.P.O. (Krauss).	Lon. LP8300
	Symphony No. 6. O.S.C.C. (Münch).	Lon. LLP232
	Capriccio Italien, Op. 45. Ph.O. (Kletzki).	Lon. LLP257
	Romeo & Juliet Overture & Francesca da Rimini. O.S.C.C. (Jorda).	Col. LX8736/7
	Variations on a theme from Suite No. 3. Ph.O. (Malko).	Lon. LLP376
		H.M.V. C4058/60

(Continued on page 58)

A Symphony of Rare Beauty and Value...at HUDSON!

- WORLD'S FINEST AUDIO COMPONENTS
- CUSTOM STYLED CABINETS
- HI-FI PACKAGE SPECIALS

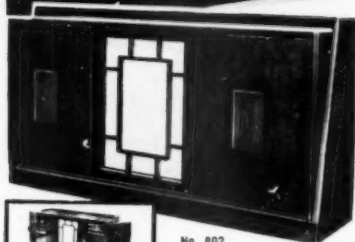

No. 802


Exclusive at HUDSON!

FINE CUSTOM-STYLED CABINETS BY HARRISON

Conceived for the contemporary or modern home, these beautifully-styled cabinets are master crafted and acoustically designed for high fidelity reproduction. Your choice of natural mahogany or walnut luxurious hand rubbed finishes. Right hand compartment accommodates a radio tuner. Record changer compartment pulls out on ball bearing slides.

Model No. 802. Outside Dimensions: Height —33", Width—60", Depth 20" **\$399.50**

Model No. 5885. Outside Dimensions: Height —37", Width—44", Depth 20" **\$315.00**



No. 5885

New TAPEMASTER Portable Tape Recorder

MODEL PT-121

Use with your own Audio Amplifier, Radio or Radio-Phono-Combination



This self-powered high fidelity recording and playback pre-amplifier with push-pull supersonic bias and erase oscillator, fully-wired and ready to plug in. Complete with 5" spool of plastic tape and 17" empty take-up spool, less microphone.

Only **\$89.95**

PA-1 Preamplifier \$31.90
TH-21 Basic Mech. \$50.00
11020 Oscillator Coil \$ 2.25

HUDSON
RADIO & TELEVISION CORP.

Formerly Newark Electric Co., Inc. of New York

GARRARD "TRIUMPH"




3-Speed
Record Changer
Model RC-80

The World's Finest Record Changer! Plays all 3 speeds and stops automatically after last record regardless of size or type. Requires no separate platform for 45 rpm records. Record changing accomplished by dependable pusher-type platform mechanism. Reject lever permits record to be rejected at any time. Extremely simple to operate. 15 1/2" x 13 1/4" W, 5 1/4" above and 3 1/2" below motor board. For 105-125 volts, 60 cycles AC. Complete with 2 spindles and 2 plug-in shells, less cartridges. Can easily be installed in your present set.

List \$56.75 Only **\$39.00**
\$1405 PICKERING Cartridge for L.P. \$15.00
\$120M PICKERING Cartridge for S'to \$9.90

RADIO CRAFTSMEN RC-10 AM-FM TUNER



With Built-in Preamplifier for GE, Pickering and other cartridges

Modern custom styling makes this brilliant performer perfect for custom installations! Automatic frequency control on FM eliminates "warm-up" period — assures no-drift tuning. Fly-wheel tuning enables a quick and accurate station selection. Double triode audio amplifier furnishes up to 3 volts output at less than 1% distortion. Output matches high or low-gain amplifiers. In Phono or TV position, power is removed from all but 2 (audio) tubes; also, edge-lighted, fluorescent slide-rule dial is dimmed. 12 tubes; bass and treble controls adjustable for flat response 20-20,000 cps. 10 kc whistle filter on AM.

List \$219.00 Only **\$131.50**

"Symphony" Package Special

Consisting of:
RC-80 GARRARD RECORD CHANGER • RADIO CRAFTSMEN C-500 AMPLIFIER • RADIO CRAFTSMEN RC-10 AM-FM TUNER
JENSEN 15" SPEAKER MODEL H-510 • \$1405 and \$120M PICKERING Cartridges for L.P. and Standard (Listed here)

With No. 802 Cabinet. Complete System. Only **\$746.68**
With No. 5885 Cabinet. Complete System. Only **\$662.18**

RADIO CRAFTSMEN C-500 AMPLIFIER

Williamson All-Triode Circuit
99.999% Distortion-Free Performance

This "ultra-fidelity" audio amplifier sets a new high in audio fidelity. Excellent for any high quality, high fidelity installation. The chassis represents the ultimate in unexcelled listening quality with practically no distortion. Frequency response: — 0.1 db, 20-20,000 cps. — 2 db, 5 to 100,000 cps. 12 watts + 2 db, 10 to 50,000 cps. Tubes 2-6SN7GT, 2-KT66, 5V4G rectifier. At this price, there's nothing better.

List \$166.00 Only **\$99.50**



JENSEN 15" HI-FI COAXIAL SPEAKER



with Wide-Angle Acoustic Lens
Model H-510

Unsurpassed for the most critical professional applications, broadcast monitoring and distinguished home entertainment systems. Provides a wide frequency range, smooth balanced frequency response, wide-angle distribution, low distortion, good efficiency and an adequate power-handling capacity. Impedance 16 ohms; power rating, 30 watts maximum. Size: Battle Opening 13 1/2" x 15 1/4", Depth 9 1/16".

List \$154.50 Only **\$90.85**

Sensational HI-FI Value! New PILOT AF 605 AM-FM TUNER

Truly fine Hi-Fi performance, never before achieved at such an amazing low price. All the technical skill and craftsmanship possible have been incorporated into this fine tuner. Contains 9 miniature amplifier tubes and 1 rectifier tube. One stage audio amplifier with flat response within 2 db from 20 to 15,000 cps. Negative feedback audio amplifier for low distortion and high signal handling ability. Low impedance audio output, 20,000 ohms. Two audio inputs for phono and TV. With FM Characteristics: Three gang tuning condenser. Tuned RF stage gives maximum sensitivity and selectivity. 20 microvolts sensitivity for 3 volt audio output with quieting. Maximum audio output is 20 volts. Temperature compensated oscillator minimizes station drift. IF response is 200 kc wide at 6 db points. Ration detector is employed with linear response 225 kc wide. 11 1/2" W x 6" x 9 1/2" D.


Only **\$42.95**

Terrific Value! Amazing Performance! Hi-Fi Phono-Radio System, Pkge. Special.

Never before so much High Fidelity Value at such little cost! Complete system consists of the following performance-proved components:

Complete Only **\$99.50**

- Pilot AF 605 AM-FM Tuner
- G.I. 3 Speed Crystal Changer
- Bogen PH-10 Amplifier
- Famous Make 12" High Fidelity Coaxial Speaker



UPTOWN:
48 West 48th St., New York 19, N. Y.

DOWNTOWN:
212 Fulton Street, New York 7, N. Y.


PHONE Circle 6-4060

ULTRA-MODERN SOUND STUDIOS

By simple push button remote control, you can select and operate any of 15,000 possible combinations of all nationally famous high fidelity components. Visit our Sound Studios or write for literature on all makes.

Equipment Report

BELL 2145-A Amplifier

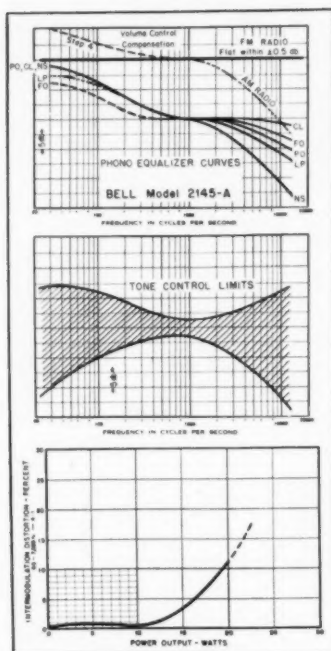

WITHIN THE LAST TWO YEARS, equipment manufacturers have recognized the requirements of the hi-fi enthusiast, and have made a number of improvements on amplifiers and other units to provide the features most desirable for home use. An outstanding example of this forward-looking trend is the Bell Model 2145-A amplifier, which we have selected as the first of this series of amplifier equipment reports.

While a large number of amplifiers have been introduced with separate control units, none has yet been completely suitable for use at some location remote from the main amplifier. Some of the later models are equipped with cathode followers so the length of the connecting lead is relatively unlimited, yet in all except the Bell the input circuits must be connected to the control unit, thus making it difficult to locate the preamplifier-control section at the user's favorite armchair or on a side table some distance from the tuner and phonograph turntable.

With the 2145-A, all inputs are plugged into the main amplifier chassis, and sufficient preamplification is furnished that the signal fed to the control section is of a level high enough to minimize the effects of hum or crosstalk. Inputs from tuner and from phonograph are fed to the control unit by cathode followers at a relatively low impedance—approximately 300 ohms—and after being "selected," equalized, and ad-



justed for tone and volume, are fed back to the amplifier chassis by another cathode follower. Furthermore, the remote unit is fed with d.c. for the heaters of the two tubes employed, and no a.c. appears in the connecting cable, which may be as much as 25 feet long.

The 2145-A employs triodes throughout, with 6B4-G's in the output stage being driven by push-pull cathode followers as the driver stage. Power output was measured at 25 watts with a line voltage of 114, and was less than 3 db down at 20 and 20,000 cps. Distortion measurements are shown at the left, along with response curves for phono and radio inputs.

Equalization Controls

The selector switch performs the basic equalization for the phonograph connection.

[Continued on page 46]

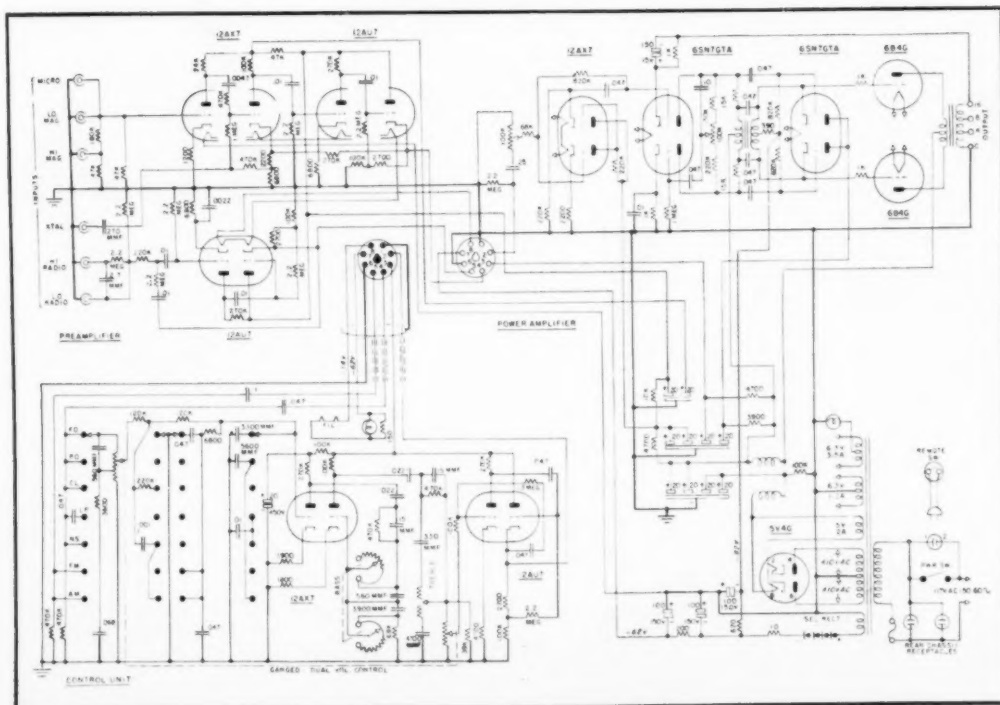

On the surface most discs look pretty much alike. And for some jobs, their characteristics may seem fairly similar, too. But can you depend on them? Are you sure that the discs you use will give consistently fine performances for any kind of job day in and day out?

when the chips are down...

You can if you select PRESTO.


That's why, in the final analysis—when the chips are down—more and more stations, studios, and schools are choosing PRESTO.

They appreciate the craftsmanship that goes into the manufacture of each disc—the meticulous preparation of the aluminum base, the use of the finest lacquers, the careful curing in the world's most modern disc plant. They know that the PRESTO label stands for a consistently good disc.

PRESTO
RECORDING CORPORATION
PARAMUS, NEW JERSEY

EXPORT DIVISION:
25 Warren Street, New York 7, N. Y.

CANADIAN DIVISION:
Walter P. Downs, Ltd.
Dominion Square Bldg., Montreal

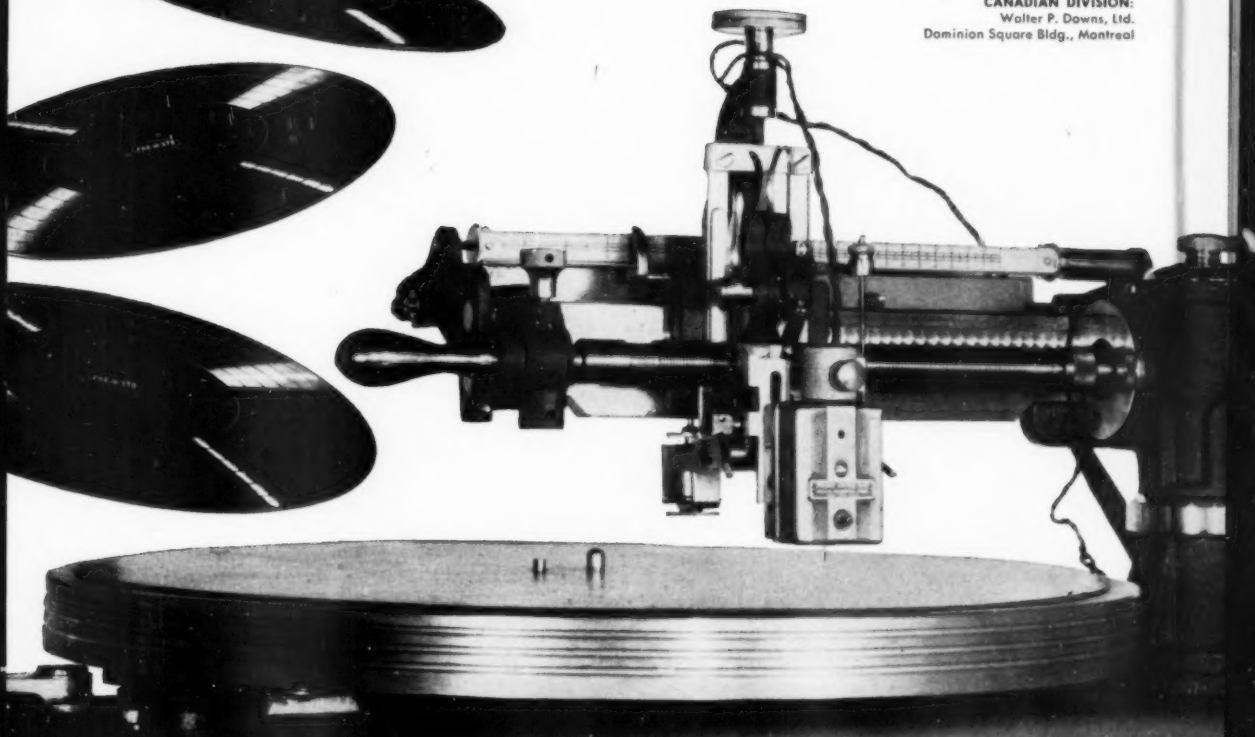

WORLD'S LARGEST MANUFACTURER OF PRECISION RECORDING EQUIPMENT AND DISCS





AUDIO engineering society

Containing the Activities and Papers of the Society, and published monthly as a part of AUDIO ENGINEERING Magazine

OFFICERS

P. O. Box 12, Old Chelsea Sta.,
New York 11, N. Y.

C. G. McProud President	Lloyd C. Wingard Central Vice-Pres.
F. Sumner Hall Executive Vice-Pres.	H. M. Tremaine Western Vice-Pres.
C. J. LeBel Secretary	Ralph A. Schlegel Treasurer

New York Section Concludes Third Lecture Series

WITH AN ENROLLMENT of over 120 enthusiastic audio-minded individuals—both members and non-members—the Third Lecture Series given by the New York Section of the Audio Engineering Society concluded on February 14, after a six-week course. The subject of the current series was "Amplifiers," important to anyone in audio work, either professionally or as a hobby.

The first lecture, given on January 10 by Hermon Hosmer Scott, provided the introduction to the entire series under the title "The Amplifier and Its Place in the Circuit—a Survey." In his talk, Mr. Scott covered the essentials involved in amplifier design and operation, primarily to point out what is necessary in any study of amplifier planning. The relation of the amplifier to other elements in the system was pointed out, and the requirements of performance and the necessary power supply problems were reviewed.

W. R. Ayres, of RCA Victor Division, discussed "Power and Voltage Amplifiers" in the second lecture. His approach was primarily from the viewpoint of the designer of actual circuitry, and covered in a competent manner the choice and use of tubes.

G. Grenier and Myron R. Coe, both of Langevin Manufacturing Corporation, shared the third evening, the former discussing special preamplifier problems in

professional applications, while the latter covered power supplies.

James Wilson, of National Broadcasting Company, presented an enlightening talk on the "Design of Complete Amplifier System" for the fourth evening, largely for the non-professional user of amplifiers.

Again with two lecturers, the fifth evening brought R. S. Gerhold and S. F. Danko, both from Signal Corps Engineering Laboratories at Fort Monmouth, with discussions of components and their characteristics, and miniaturization—an important subject in current electronic design practice.

The course concluded with a discussion of "Measurement Methods," given by H. B. Hoepfer of Airborne Instruments Laboratory, Inc. This lecture described current practice in measuring gain, frequency response, input and output impedance, and distortion—both harmonic and intermodulation.

All who attended the series were given lecture notes prepared by the individual speakers for their respective talks, and similar in content to those of the first two lecture courses. These notes will be made available to members and non-members at nominal fees as soon as all who registered have obtained those notes for lectures at which they may not have been present. Announcement will be made on this page as soon as the availability is determined.

Marcus and M. V. Marcus; "Automatic audio gain controls," by J. L. Hathaway; "Sound reinforcing systems," by Arthur W. Schneider; "Loudspeaker damping," by Albert Preisman; "The effect of sound intensity level on judgment of 'Tonal range' and 'volume level,'" by Stephen E. Stuntz; "A new method of measuring and analyzing intermodulation," by C. J. LeBel; "Toward a more realistic audio," by Ross H. Snyder; "The measurement of audio volume," by Howard A. Chinn; and "Direct radiator loudspeaker enclosures," by Dr. Harry F. Olson.

At the present time, all of these papers are included in the sets, and all will be supplied as long as they are available.

MEMBERSHIP APPLICATIONS

The lack of an application form may have deterred many who wish to join the Society from actually doing so. However, for their convenience, such a form may be found on page 64 of this issue. Please note that the remittance for the grade desired must accompany the application, and that the form must be signed by the applicant.



Employment Register

POSITIONS OPEN and AVAILABLE PERSONNEL may be listed here at no charge to industry or to members of the Society. For insertion in this column, brief announcements should be in the hands of the Secretary, Audio Engineering Society, P. O. Box 12, Old Chelsea Station, N. Y. 11, N. Y., before the fifth of the month preceding the date of issue.

★ Positions Open • Positions Wanted

★ **Radio Engineers.** The Department of State needs radio engineers at present and under-construction relay bases overseas for its Voice of America program.

Salaries are from \$4719 to \$6807 plus a tax-free allowance for rent, heat, light, fuel, and electricity. In addition, there is a variable allowance to adjust for living costs at posts where the cost of living has been determined to exceed that prevailing in Washington, D. C., and a differential is also paid to employees serving at posts which are considered to have exceptionally difficult living conditions.

Interested American citizens of at least five years' standing and who are willing to serve at any post abroad for a continuous period of not less than two years may obtain further information by writing a resume of their qualifications to the Division of Foreign Service Personnel, 1734 New York Avenue N.W., Washington, D. C.

The Audio Fair in Chicago

Following immediately after the annual Radio Parts Show in May, the first Audio Fair in Chicago will open its doors at 10:00 a.m. on Friday, May 23, and run until 9:00 p.m. on Saturday, May 24.

Choice of these dates makes it possible for many exhibitors who will already be set up for the Parts Show to remain for two more days and display their audio products with a minimum of effort in preparing for the onslaught of midwest audio engineers and hobbyists. The Parts Show, never open to the public, occupies the fifth and sixth floors of the Conrad Hilton Hotel from May 19 to May 22, and those exhibitors with audio products can remain for two more days in the newest Audio Fair. Distributors, and those manufacturers who are not exhibiting at the Parts Show, will be assigned rooms on the seventh floor of the hotel, and all three floors will be open to the public for the two days of the Fair, according to Harry N. Reizes, Fair Manager.

The unparalleled popularity of the yearly Audio Fair, held in New York each Fall in conjunction with the Society's Annual Convention, is expected to be duplicated

with the midwest showing, and members and enthusiasts in the Chicago area are exhorted to mark May 23 and 24 in their date books early to make sure that they do not miss the newest Fair.

The Society is sponsoring the Chicago event, as it does The Audio Fair each year in New York.

Back Issues of AES Papers Available

For the benefit of members who may have misplaced their Society publications, or for non-members who may wish to obtain a complete file of AES papers, the Secretary's office announces the availability of sets of previously published papers. These sets may be obtained by writing the Secretary, Audio Engineering Society, P. O. Box 12, Old Chelsea Station, New York 11, N. Y. accompanied with a remittance of \$1.00 for members and \$2.00 for non-members.

The available papers include: "Longitudinal noise in audio circuits," by H. W. Augstadt and W. F. Kannenberg of Bell Telephone Laboratories; "The diamond as a phonograph stylus material," by E. J.

AM · FM · TELEVISION

Consolette


"All-New" Design




NEW STUDIO CONSOLETTE, TYPE BC-2B

"Color-coded" controls tie related functions together. 30° sloping front and top provide maximum studio visibility. Zero-rear-clearance feature makes it practicable to install the BC-2B tight against a studio window. Less operating space required. Type BC-2B is six inches shorter than previous models! See next page.

Hinged front panel—and "Swing-up" amplifier frame make all underside components easily accessible.

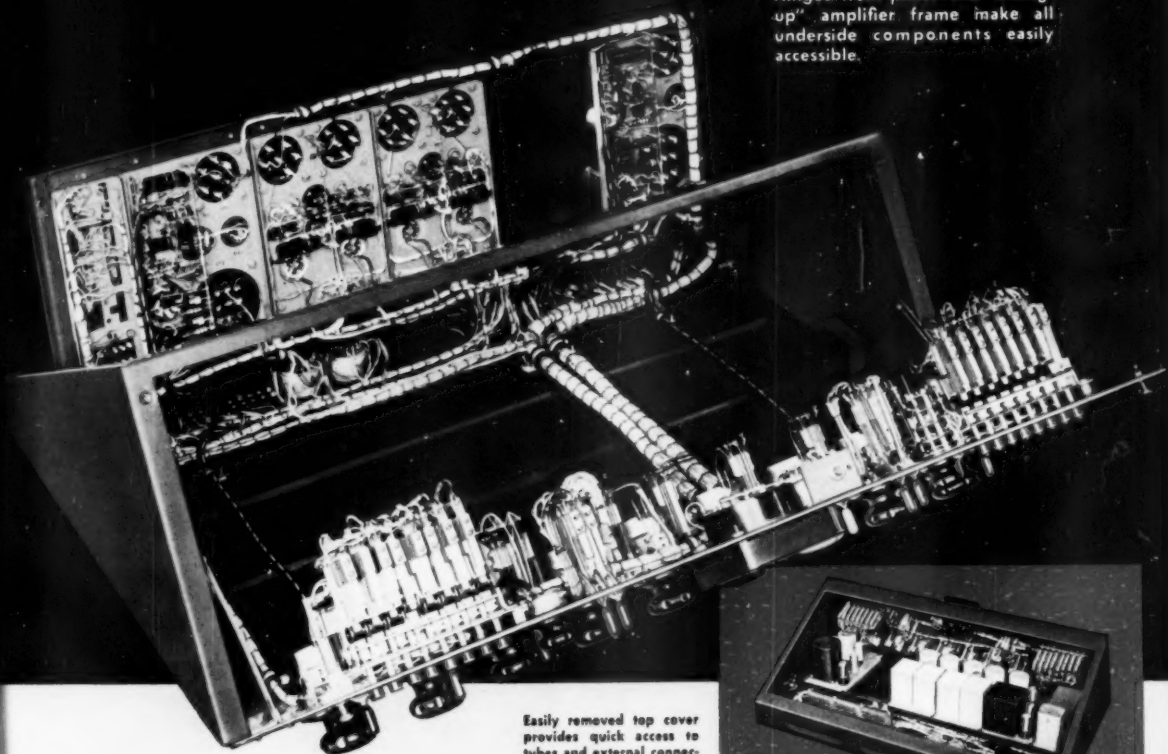

Easily removed top cover provides quick access to tubes and external connections. The BC-2B will fit snug against the studio window.

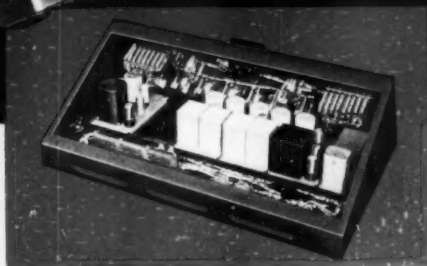

NEW DESIGN *consolette*

Color coded for "error-proof" control

Cam-operated, "leaf-type" interlocking push-button switch.



The new consolette BC-2B provides all the essential audio facilities needed by most AM, FM, and TV stations—plus many extra operating advantages not previously available in a standard consolette. It speeds up switching operations substantially over previous

designs. It provides for complete control of all studio operations. *The BC-2B gives your station "deluxe" features at a "standard" price.*

Read the list of exclusive "extra" features the new BC-2B offers you. Then ask your RCA Broadcast Sales Representative for complete details. His service is as near as your phone.

11 extra features!

- "Color-coded" controls quickly identify and tie related functions together.
- New, leaf-type cam-operated interlocking, push-button switches.
- New hinged front panel for easy access to switches, gain controls, and contacts.
- Amplifiers mounted on "swing-up" frame; chassis easy to remove.
- New 30° sloping top panel for maximum studio visibility—toting compatible with modern AM and TV practice.
- New compact amplifiers use low-noise, long-life, miniature tubes.
- Improved, faster-operating speaker relays eliminate key clicks and audio feedback.
- Lamp dimmer for VU meter (ideal for TV service).
- 8 high-level mixing channels; separate gain controls for network and remote.
- Turntable mixers with "built-in" cueing switches.
- No clearance required at rear—can be installed up against walls and control room windows. Uses less desk space, too.



RADIO CORPORATION of AMERICA
ENGINEERING PRODUCTS DEPARTMENT CAMDEN N.J.

How to Use Magnetic Pickups

Ulric J. Childs*

Adapting a radio-phonograph to use a magnetic pickup is a simple operation if you use the methods described by the author. All the equipment is readily available, and there is nothing to build.

THE PRESENT TREND among people who like good music and like to have it sound better is to replace crystal phonograph pickup cartridges with magnetic-type cartridges such as the Audak, Clarkstan, General Electric, Pickering, and others. Magnetic cartridges are capable of better performance than most crystals because they give much smoother reproduction and are able to extend the music reproduction to the higher overtones. However, you can't eat your cake and have it too—in audio any more than in a restaurant; for along with the *potentially* fine results goes the necessity to add something to the other parts of the system. If you don't do it, or if you do it wrong, the fine results remain potential and your time and money have not been spent in the most gainful way.

All crystals and magnetic pickups are small electrical generators. But modern magnetic pickups generate far less than crystals. To get sufficient power from the amplifier to drive the loudspeaker, the amplifier must do a bigger signal-magnifying job—and most amplifiers designed for crystals just don't have enough amplifying capability to do it. Standard radio-phonographs are included in this category. The simple and effective answer is to add a preamplifier, which is a small amplifier increasing the capability of the existing one. The prefix "pre" indicates that it is connected *before* or *ahead* of the main amplifier, usually between the magnetic pickup cartridge and the amplifier itself. Fig. 1 is a block diagram showing the record-playing chain, including a preamplifier.

Several phonograph preamplifiers are sold especially for this purpose. In this article we shall describe only a few of them to indicate how they should be used.

Figures 2 and 3 show the General Electric SPX-001 and UPX-003 preamplifiers. They are the same, except that the UPX-003 (Fig. 3) has its own built-in power supply and is energized from a 115-volt a.c. outlet; the SPX-001 has a

* 1601 First Ave., New York 28, N. Y.




Fig. 1. Block diagram of the basic elements of a record-playing system using a magnetic pickup.

four-wire cable which is connected to the power supply within the amplifier with which it is used. There is no significant difference in performance—it's simply a question of whether or not it is convenient to take power from the amplifier. Many amplifiers today have sockets for this purpose, and a plug may be soldered to the end of the 4-wire cable and inserted in this socket. Commercial radio-phonographs do not have this socket so that soldered connections must be made inside the chassis to obtain power if the SPX-001 is used.

The GE preamplifiers have enough amplification to compensate for the low output of any magnetic cartridge, more than enough, in fact, for some, though this is not harmful. To install it, power must first be provided as outlined previously. Then the plug on the shielded cable coming from the pickup arm must be inserted in the input jack, seen on the side of the chassis in the photos. This is the same kind of jack as appears on most amplifiers and radio-phonographs, so presents little problem. If,

rect one. In both cases, a technician or serviceman should do the soldering job unless the owner is familiar with the work.

The Pickering Model 230H preamplifier appears in Fig. 4. The gain is slightly less than that of the GE preamplifier, but still sufficient. It has the




Fig. 4. Another self-powered preamplifier is the Pickering, Model 230H, with vibration-reducing rubber grommets for mounting.

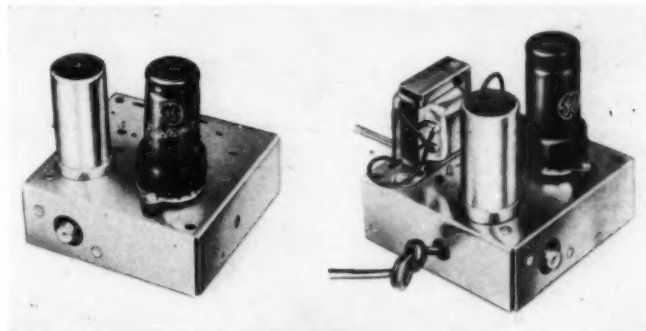


Fig. 2 (left) and Fig. 3 (right). Two types of General Electric preamplifiers—SPX-001 at left requires power supply from the amplifier or radio chassis, and UPX-003 at right, which is self-powered.

however, the pickup cable ends in some other type of plug, it must be removed and the correct plug soldered in place. Any radio parts store or serviceman can supply the correct plug. A shielded cable comes from the preamplifier (it does not appear in the photographs) and has a similar plug at its end which is to be inserted in the jack on the amplifier or radio-phonograph. Again, if the jack does not correspond to the plug, a parts store or serviceman can supply the cor-

same connection provisions as the GE units, but is available only with built-in power supply. The distortion of the Pickering is extremely low (a maximum of 0.2 per cent intermodulation at normal output level).


There is another and extremely important job that must be done for best results when a magnetic cartridge is used—equalization. Each recording company emphasizes the volume level at certain portions of the pitch range—this is

known as pre-emphasis—and reduces that of other parts. Generally the higher frequencies are emphasized. In playing back, we must reduce the highs to offset the pre-emphasis, and in so doing we reduce surface noise, too. The problem is to reduce the highs in approximately the same way as the manufacturer emphasized them. In addition, the bass range is attenuated in recording to avoid cutting over into adjacent grooves. To offset this, we must emphasize the bass in playback, again in just the right way. The rub is that different record makers do these two things in different ways. Ideally, therefore, we should have controls to change the treble attenuation and the bass boost so that they will complement the characteristics of the particular record we are playing at the moment.

Many amplifiers and radio-phonographs have tone controls. These are not equalizers. They cannot adjust the points in the frequency range at which the emphasis and attenuation begin; they can adjust only the amount of rise and fall, always beginning at the same point. While tone controls can give a rough approximation which satisfies some ears, a more exact method is required for really good results. And the only way to achieve it is to provide multiposition rotary switches, each step of which selects a special circuit which has been designed for correct equalization.

Very few systems provide for step-type bass equalization. Ordinarily only custom installations are so equipped. The writer's preamplifier has separate bass and treble equalization switches, with a total of twenty calibrated combinations. However, almost all preamplifiers including the GE and Pickering, have fixed bass equalization which is a good match for most American records and for London LP's. Beginning at 500 cycles per second, the output voltage doubles each time the frequency is cut in half—a rise of 6 db per octave with decreasing frequency. Some, unfortunately, do not carry this scheme to a low enough frequency—ideally, about 10 cps should be the lower limit. Most units carry equalization down to between 50 and 100 cps, which is in many cases a satisfactory compromise unless the ultimate in

Fig. 6. Typical of complete control units is the Pickering Model 410 Audio Input System, which has volume and tone controls in addition to preamplifier.

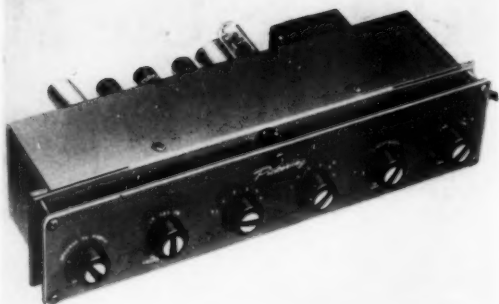

good reproduction is sought. European records require less bass boost since their dropoff begins at 250 cps or thereabouts. As a result, they often sound "boomy" when played through the usual system.

The Pickering Model 132E Record Compensator, Fig. 5, does a good job of equalizing in the treble range. It has a rotary switch with six positions, each of which is a satisfactory match for certain records. As the photo shows, the record types are indicated on the dial. The Record Compensator is inserted between the pickup and the preamplifier. The cable from the pickup is plugged into the connector on the left side of the case and the cable from the Compensator is plugged into the preamplifier. The shortest possible lengths of cable should be used in any system of this kind; longer lengths cause loss of high-frequency response. The Pickering Compensator may be used with any preamplifier which has an input resistance of 47,000 ohms. The GE units have a lower input resistance, but any serviceman can replace the 6,800-ohm input resistor with a 47,000-ohm resistor. The Pickering preamplifier is supplied with the correct resistor. The Compensator will not, however, equalize correctly for any but the Pickering cartridges.

An interesting and useful unit is the new Pickering Model 410 Audio Input System. This unit contains a preamplifier, a step-type equalizer, and all necessary controls for an entire installation.

The first rotary switch selects either phonograph, television (if an audio take-off is provided on the TV set), or radio tuner. Only the phonograph pickup is put through the preamplifier. The second control selects one of three high-frequency record-equalization characteristics, including, incidentally, the standard playback curve of the Audio Engineering Society. The next two controls are step-type bass and treble tone controls. The fifth is a volume control and the last is an on-off switch for the entire system, including amplifier and turntable.

The question of which pieces of equipment to select are dependent on how much money there is to spend and what any individual likes best. The former can be decided without any help. The latter should be resolved by listening tests. At least in the larger cities, more and more audio salesrooms are equipped to demonstrate these and other units, with pick-up-equalizer-preamplifier-amplifier-speaker combinations as desired. There is still no better way to reach a decision than to listen with both ears.



Fig. 5. In order to match the pre-emphasis used by most record makers, the Pickering 132E Record Compensator can be connected between Pickering pickups and the preamplifier.

ERRATA ETCETERA

NUMEROUS eagle-eyed readers have noted a few errors in past issues which have heretofore escaped detection by the pseudo-eagle-eyes on our staff. For the record, and with the suggestion that readers make suitable notes in the issues involved, here are the corrections.

In O'Brien's article, November 1951, no mention was made of the switch S_1 and capacitor C_1 at the output of the unit. This switch, when closed, provides a fixed amount of high-frequency roll-off, approximating that required for the AES curve, although not quite sufficient for this purpose. If complete correction were desired, the capacitor C_1 should be 0.013 μ f. However, the input capacitance of the power amplifier, together with the shielded connecting cable must be considered in determining the roll-off. These two capacitances may be considered as being indigenous to the power amplifier, and should be lumped together in making calculations.

In the continuously-variable-turnover preamplifier described by Jones in the January issue, the capacitor shown as 0.01 from the cathode of the 6C4 to the variable resistance R_v will give turnover frequencies which are much too high for commercially available phonograph records. The amplifier as shown would be more useful for a tape playback amplifier than for record reproduction. If, however, the capacitor had a value of 0.005 μ f, the range of turnover frequencies would extend from 1100 cps down to 250 cps, and would be better for phonograph use.

Last, but not least in the recent history of errors, is the transposition of Figs. 8 and 9 on page 15 of the February issue, in the Toth article. This is reasonably obvious to the reader, but is here mentioned to indicate that we are regrettably aware of the misup.

To our observing readers, orchids; to our unobserving proofreader, a series of brief but effective "tch-tch's."

Purity of bass down to 30 cps

WITH
THE NEW

KLIPSCH E-V LICENSED

Royal

FOLDED CORNER HORN ENCLOSURE



Designed for 15" Coaxial Speakers and
800 cps Separate 2-Way and 3-Way Systems

Reproduces the lows with
unprecedented efficiency. Laboratory
flatness ± 5 db to 30 cps. Upper
register response more pleasing, too,
because of proper over-all musical
balance. Authentically styled, amazingly
compact, and moderately priced.



A new musical experience awaits you...
in the ROYAL. Hear lows you can literally
feel! This beautiful corner cabinet
employs the walls of the room as an
extension of the exponential air load on
the driver. Designed for 15" coaxial
speaker, or for 800 cps separate 2-way
and 3-way systems without modification.
*Listen to the ROYAL at your E-V
Distributor, or write for Bulletin No. 183.*

The ROYAL—Another E-V First!

Fits beautifully in any room. Exquisite
veneers in hand-rubbed lustrous Heirloom
finish. 37" high, 20 1/2" deep, 23 3/4" wide.
Net Wt. 69 lbs. Shpg. Wt. 79 lbs.
Mahogany, Less Speaker, List Price, \$180
Blonde Karina, Less Speaker, List, \$190



The ARISTOCRAT

Popular low-cost E-V folded
corner horn enclosure for
single 12" full range speaker
29 1/2" high, 16 1/2" deep,
19" wide

Mahogany, Less Speaker,
List Price \$ 99.50
Blonde, Less Speaker,
List Price \$106.00

Electro-Voice

400 CARROLL STREET • BUCHANAN, MICHIGAN
Export: 13 E. 40th St., New York 16, U.S.A. Cables: Arlab

HI-FI SPEAKER SYSTEMS • MICROPHONES • PHONO-PICKUPS • TV BOOSTERS • TV DISTRIBUTION SYSTEMS

Licensed under Klipsch Patents No. 2310243 and No. 2373692

RECORDED REVUE

EDWARD TATNALL CANBY*

How I Fell Into Audio

THIS IS GOING TO BE a species of biography—but first an aside. This department sometimes finds itself in a curious dilemma—everybody in records and audio is out shouting his head off about the latest sensation to hit the Big Time (Tape in the Home, maybe, or Hi-Fi Custom Installations . . .) and we seem in a mood, here, to stand by, just a bit bored. The reason? Merely because, time and again, our bolt has already been shot, back when no one was interested and we were aiming high, perhaps blind, and too soon.

Bad timing, perhaps. We didn't wait for the psychological moment. But, after all, somebody's got to say, "hey, look over here!", when nobody wants to look over here because Publicity's searchlight is spotting elsewhere.

Anyhow, if some of our new readers—especially the hi-fi converts with all their enthusiasm—find us occasionally off, instead of on current publicity handwagons, well, maybe we are. We try to get ahead. But just take a look through the back issues. End of aside.

Falling into Audio

Well, then, how *do* you get ahead of time (and we'll stand on our record there)? In particular, some may wonder what led this individual musician, wholly trained in music, no engineer, into the surprising position of a guy who is supposed to know What's Coming Next in records and audio.

At this point I can't help knowing it—they throw it at me right and left. I'm as likely as not to hear about a good thing very early in the game. The mechanism of getting ahead-of-time information is simple enough. But, if I do say so, it takes a kind of attitude of mind, and a variety of enthusiasm for new possibilities and, maybe most important, a habit of picking up basic principles from all sorts of casual and everyday happenings such as almost anyone deciphering with music on records might have.

Herewith, then, a first installment of personal experiences that had this very effect on me, way back. Things that made me topple slowly but surely, but with surprising inevitability, into the present area, bridging the technical and musical aspects

of recorded sound. Engineers may be amused or horrified; some of the lay brethren may exclaim, "Why, I did that too!" As far as I'm concerned, the whole "audio" development, hi-fi and all, and the spread of recorded music, has been in the cards for twenty years at least. Nothing more than elementary common sense, given a few basic facts and situations. Anybody could have seen it coming. I did. But I didn't study all this up, consciously. Not a bit. I just fell into it. What astonishes me is that everybody else didn't fall in too. Here's how.

Year One—Wrong Tune

The Year One finds me, maybe aged 6, with a fine, circular toy metal Victrola, painted orange, with slots in the sides. Mommie gave me Mother Goose records from the Five and Ten and I played Popular Favorites too. My nurse, the so-and-so, warned me that if I was naughty, the Victrola would play the wrong tune; that had me in a state of mind for weeks. I was horribly afraid that, one day, the thing wouldn't play "Over There" (Caruso—"Johnnie get your gun, get your gun, get your gun . . .") when I wanted it to. I began to wonder, right then, just what it was that made a Victrola emit music. Of course I definitely had no idea this was reproduction of sound—a conception a bit beyond youngsters of that age. The machine talked, or made its own music—I called it "Victrola-music"—and that was that. If it wanted to change its tune, surely it could.

Scene Two (skipping lightly onward) circa 1927, discloses a Prep School liberally equipped with Orthophonic Victorolas. Wow! They played Franck and Brahms Symphonies to us and Bach-Stokowski, soon after.

One Sunday our ardent music teacher hauled the biggest Orthophonic up into the balcony of our dining-hall-chapel and we had the Philadelphia Orchestra, floating through the stonework, for our musical prelude. That was my first experience with Distributed Sound Source, the root of many a later (and continuing) experiment in loudspeaker placement. Bach-Stokowski, echoing through a stone building from no

one knew just where, was so overwhelmingly more effective than the sound of the same record on the same machine in our uninteresting little class room, that I realized an Idea had been born in me. I've been fussing with it ever since. Lesson 1.

1930—Artificial Echo

Went to college—Yale, for a year—rented me a portable phonograph, bought my first records. One day, somehow or other, I got the zany idea of playing two pickups on one record! Took off the electric pickup of my machine and tracked it right behind the acoustic one of somebody else's machine. We were most gratified at the huge volume and expansion of the music (all relative, of course) but I was vastly intrigued, being a real crackpot experimenter, with the "echo" we got when one needle traced a couple of inches behind the other. Many times I tried it again, later, to see what crazy effects I could get, and I found, of course, that an almost natural impression of what we'd now call increased liveness was possible.

Never took it seriously, though. I didn't take any of this seriously. Just a lot of kid stunts. (We also tried every variety of off-center hole, just like other kids. Wasn't until the little twist-starting motors came along, later, that we managed to run a record backwards. Was that a happy discovery!)

1932—The Machine, not the Records


I moved on to Harvard, and roommate and self splurged on a second-hand RCA console. Bulbous protuberance where the speaker was mounted. A weird radio tuning handle that reminded me of a tongue stuck out between horrid, grinning stretched lips. (Must have been an RE-45, Ed.) We bought the entire set of Ansermet Handel Concerti Grossi and the huge Brunswick gold-label album of Beethoven's Missa Solemnis. Were we highbrow. Too highbrow—we returned 'em. But the sequel was interesting. I kept a few of the Handels (still have them) because I liked the music, though we had decided they were hopelessly defective because the bass notes broke up so badly that the music was hash.

Come spring, we traded in the RCA on [Continued on page 40]

* 279 W. Fourth St., New York 14, N. Y.

In music, listening quality is everything

that's what the man says...



One single magnetic unit plays all home records—Sapphire or Diamond styli.

Special models for radio stations, including Vertical-Lateral units.

"... In music, listening quality is everything. My CHROMATIC POLYPHASE has that quality to a degree that I never thought possible. More than that—for the first time, I am now able to test-play a soft master-disk without damaging the groove-walls. I am thrilled with its performance. . . . By the way, after many comparisons, I have decided to use the AUDAX H-5 CUTTER exclusively. . . ." So says the violinist (Toscanini's ABC Symphony) of "Musician's Amplifier" fame.

For years, Weil has been preaching that in reproduced music, listening quality is everything, just as it is at the actual concert. If the quality is present, you may be sure the range is there also. The reverse, however, is seldom the case.

Never before such EAR-QUALITY, such FAITHFUL REPRODUCTION, but . . . after all the reams are written about kilocycles and other laboratory data—when the chips are down—YOU and only YOU can decide what sounds best and most pleasing. Therefore . . . SEE and HEAR POLYPHASE and—YOU be the judge.



with the new Compass-pivoted Audax arms and for Record Changers.


Write for editorial reprint
on POLYPHASE Principles

Be sure to obtain a copy of PHONO FACTS
from your distributor

AUDAX COMPANY

500 Fifth Avenue New York 18

"Creator of Fine Electro-Acoustical apparatus
for over 25 years."

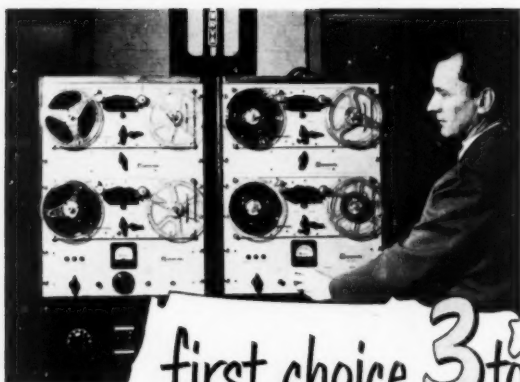

first choice ^{3 to 4}
of radio engineers
from coast to coast

Magnecorder high fidelity
tape recorder

Astounding performance in perfect sound recording and play-back! . . . in the field, on location, or in the studio. That's the big reason why more radio stations in America prefer Magnecorders to all other professional recorders.

Magnecorders are "head and shoulders" above all other tape recorders in other important ways, too . . . in easy portability, in dependability under toughest conditions, in variety of unit combinations for every recording need.

For "live" tone quality, low distortion, complete dependability, at very low prices — you need Magnecorder . . . first choice of sound engineers everywhere.

For Portable,
Rack, or
Console use



for complete list of models and technical data
send for new catalog!

Magnecord INC.

360 North Michigan Avenue
Chicago 1, Illinois

Dept. AE-3

Please send me your latest catalog of Magnecord equipment.

Name.....

Address.....

City..... Zone..... State.....



a more modern (1931) model. Lo and behold, the records sounded fine. So it had been the machine that was wrong, not the records. A simple thing, but a lesson I'll never stop preaching.

A cardinal point in any man's phonographic roster of common sense, now as then, is to blame the record *last*, not first. How many do it! We've been going off the track regularly on this score ever since. (I'm still getting complaints about L.P. records that "don't track," for instance, when it is long since obvious that the fault is in the playing arms 99 per cent of the time.)

That summer I was treated to the extreme reverse of the Distributed Sound experience. This clinched it. Went to the Concord Summer School of Music, where one hot day in a high school gym we were presented with a lecture on the Bach B Minor Mass—illustrated. The dear professor, so musical, so utterly unmechanical (he treated photographs the way horse-minded grandpa approached the horseless carriage), gave his talk, then pulled a monster Electric Victrola out on the stage at one end of the gym, planked it right on the edge, aimed squarely in our faces, and turned up the volume. I shall never suffer a more hideous "concert." I'm sure.

There and then, the very hard way, I discovered the musical Point Source Effect, which I was ever afterwards to avoid, in devious and various ways!

I've given many a phonograph "concert" since, but not once has the speaker ever been aimed directly at an audience, without some form of interference to "break up the beam." Our newer systems, horn and otherwise, do much to meet this trouble automatically, but the principle remains and I still prefer a sidewise or rearwards speaker aim, using reflection, if I can possibly manage it.

1934—Intimations of Hi-Fi

How did I discover "hi-fi?" You define that word and I'll tell you. But I keep moving backwards in time, as I think along, to some earlier revelation that might be, for me, the beginning of an interest in modern quality reproduction.

In 1934 certain gaudy and flamboyant mail-order ads reached my college door and neatly trapped me. "Buy this Super-Ultra-Incredible radio by mail, at a fraction of retail cost! Sixteen tubes (that slayed me), 29 shortwave bands (or almost), Magic Color Tuner with 8 sets of colored lights. . . ." I fell.

But by some bit of unusual prescience I had the sense to fall even further. For \$15 extra I ordered an ultra-fancy speaker, installed free, that would add the last touch of superb realism.

Astonishingly enough, it did. That speaker kept me blissfully happy and well ahead of Competition for a good five years, before it was junked. You may laugh at my naivete, but the thing was fantastic, a revelation and a local sensation. The sound of my records (with the mail-order set's fairly good audio as I now realize) was so amazingly better than anything we had ever heard before that I went around for days in a delirium and practically never turned the thing off. People came from far and wide. (To be specific it was a Wright DeCoster 12-in. electrodynamic heavy-duty, "specially designed." Probably took a good 10 or 15 watts.)

By almost-accident, then, I'd discovered dramatically, for the first time, the value of a quality separate-unit component and the importance of a good speaker. By another bit of prescience, I'd also acquired a fine RCA record player attachment, two-

New 1952 HEATHKITS

Heathkit
TELEVISION
GEN. KIT \$39⁵⁰

Heathkit
ELECTRONIC
SWITCH KIT \$19⁵⁰

Heathkit
AUDIO GEN.
KIT \$34⁵⁰

Heathkit
CONDENSER
CHECKER KIT \$19⁵⁰

Heathkit
R. F. SIGNAL
GEN. KIT \$19⁵⁰

Heathkit
A.C. VOLTMETER
KIT \$29⁵⁰

Heathkit
SQUARE WAVE
GEN. KIT \$29⁵⁰

Heathkit
INTERMODULATION
ANALYZER KIT \$39⁵⁰

Heathkit
AUDIO FREQ.
METER KIT \$34⁵⁰

Heathkit 5" OSCILLOSCOPE KIT

- New "spot shape" control for spot adjustment — to give really sharp focusing.
- A total of ten tubes including CR tube and five miniatures.
- Cascaded vertical amplifiers followed by phase splitter and balanced push-pull deflection amplifiers.
- Greatly reduced retrace time.
- Step attenuated — frequency compensated — cathode follower vertical input.
- Low impedance vertical gain control for minimum distortion.
- New mounting of phase splitter and deflection amplifier tubes near CR tube base.
- Greatly simplified wiring layout.
- Increased frequency response — useful to 5 MC.
- Tremendous sensitivity .03 RMS per inch Vertical .6V RMS per inch Hor.
- Dual control in vernier sweep frequency circuit — smoother acting.
- Positive or negative peak internal synchronization.
- Multivibrator type Wide Range Sweep Generator.

A brand new 1952 Heathkit Oscilloscope Kit with a multitude of outstanding features and really excellent performance. A scope you'll truly like and certainly want to own.

The kit is complete with all parts including all tubes, power transformer, punched and formed chassis, etc. Detailed instruction manual makes assembly simple and clear — contains step-by-step instructions, pictorials, diagrams, schematic, circuit description and uses of scope. A truly outstanding value.

MODEL O-7
SHIPPING WT. 24 LBS.

\$43⁵⁰

Heathkit VACUUM TUBE VOLTMETER KIT

- New styling — formed case for beauty.
- New truly compact size — Cabinet 4 1/8" deep x 4-1/16" wide x 7 3/8" high.
- Quality Simpson 200 microamp meter.
- New ohms battery holding clamp and spring clip — assurance of good electrical contact.
- Highest quality precision resistors in multiplier circuit.
- Calibrates on both AC and DC for maximum accuracy.
- Terrific coverage — Reads from 1/2V to 1000V AC, 1/2V to 1000V DC, and 1 to over 1 billion ohms resistance.
- Large, clearly marked meter scales indicate ohms, AC Volts, DC Volts, and DB — has zero set mark for FM alignment.
- New styling presents attractive and professional appearance.

The 1952 Model Heathkit Vacuum Tube Voltmeter! Newly designed cabinet combines style and beauty with compactness. Greatly reduced size to occupy a minimum of space on your work-bench. Covers a tremendous range of measurements and is easy to use. Uses only quality components including 1% precision resistors — in multiplier circuit for greatest accuracy. Simpson 200 microamp meter with easy to read scales for fast and sure readings.

All parts come right with kit, and complete instruction manual makes assembly a cinch.

MODEL V-5
SHIPPING WT. 5 LBS.

\$24⁵⁰

YOU SAVE BY ORDERING DIRECT FROM MANUFACTURER

EXPORT AGENT
ROCKE INTERNATIONAL CORP.
135 4TH ST.
NEW YORK CITY (14)
CABLE: ROCKE N.Y.

The HEATH COMPANY
... BENTON HARBOR 25, MICHIGAN

for OPTIMUM P.A. PERFORMANCE at moderate cost!

Specify

CHICAGO

Public Address Range Audio Transformers

These famous CHICAGO "Sealed-in-Steel" Output Transformers are the choice of many leading makers of high-quality amplifiers. Unmatched for service in the Public Address range, they have a frequency response within .5 from 50 to 10,000 cycles, and will deliver their full rated output over this entire range.

Line and voice coil impedances used in the design of these output units are those recommended by RMA. All have tertiary windings to provide 10% inverse

feedback. Output and matching drivers are fully enclosed in one-piece drawn-steel cases. Available in choice of two dependable constructions: with wire leads—at surprisingly modest cost; with solder lug terminals, at slightly higher cost. Order from your electronic parts distributor. Be sure to ask for CHICAGO P.A. Range Audio Transformers.



OUTPUT TRANSFORMERS

Catalog No.	Typical Output Tubes	Class	Impedance Primary-Secondary	Max. D-C in Pri.	Power Level	List Price
PCO-80	P-P 6B4G's, 6L6's	A ¹	Pri: 5,000 ohms CT Sec: 600 150	120 ma.	20 watts	\$12.10
PSO-80	P-P 6V6's, 6L6's	AB	* 16 8 4 ohms			16.30
PCO-150	P-P 6V6's, 6F6's	AB	Pri: 10,000 ohms CT Sec: 600 150	200 ma.	15 watts	10.45
PSO-150	P-P 6K6's	AB ¹	* 16 8 4 ohms			14.85
PCO-200	P-P 6L6's	B	Pri: 6,000 ohms CT Sec: 600 150	250 ma.	30 watts	13.75
PSO-200	P-P Parallel 6V6's	AB ¹	* 16 8 4 ohms			18.15

DRIVER TRANSFORMERS

Catalog No.	Typical Driver Tubes	Primary Impedance	Max. D-C in Pri.	Ratio Pri./1/2 Sec.	List Price
PCD-10	P-P 6N7's, 6A6's,	20,000 ohms CT	10 ma.	3:1	\$5.50
PSD-10	6J5's, 6C4's, etc.				7.95
PCD-25	P-P 6N7's, 6A6's,	20,000 ohms CT	25 ma.	3:1	5.20
PSD-25	6J5's, 6C4's, etc.				7.70
PCD-100	P-P 6B4G's, 45's,	5,000 10,000 ohms CT	100 ma.	5:1	9.35
PSD-100	2A3's, 6L6's, etc.				13.20

* Has tertiary winding to provide 10% inverse feedback. † For low distortion, use fixed bias.



Write for "NEW EQUIPMENT" TRANSFORMER Catalog

The units described above are typical of CHICAGO'S New Equipment Line featuring engineering that sets the transformer trend in circuit design. Get the full facts on the complete line now. Check the features, check the quality. Check the price: see how little more these tougher, better units cost. Write for your free copy of the CHICAGO New Equipment Line Catalog today.

CHICAGO TRANSFORMER

DIVISION OF ESSEX WIRE CORPORATION

3501 ADDISON STREET • CHICAGO 18, ILLINOIS



speed, one of the very first ever made. Straight-arm horse-shoe magnet pickup, guaranteed to track perfectly at 8 or 9 ounces. With new pickups, it followed me around for years—another useful separate unit.

Around 1940, when I'd long since been deeply involved in a new and separate amplifier, the old speaker was finally junked after some abortive attempts to add a sort of "tweeter" arrangement via some 50-cent miniature speakers. (See—I'd begun to hear about highs. . . .) It had done its job all right, for by that time it was a vital part of my power supply filter. The thing was so solidly built I never did figure out how to get the coil out of the frame, and so it sat on its rear under my kitchen sink, filtering rectified a.c. for another couple of years before it departed for good. Worth 15 bucks extra? You bet.

Thus did High Fidelity in a basic sense, better sound reproduction, enter my life with a succession of loud noises. It was only 1934, but I'd already caught on to the principle that if you buy better equipment, buy separate units, you'll get better, cheaper reproduction. Seems I was well ahead of the game, to put it mildly. But I didn't even know it.

Try these on your hi-fi equipment

(Note: As in earlier listings, these combine hi-fi on the technical side with good mixing for the type of music and adequate performance. Code symbols add details.)

Key

® Outstanding recorded sound for the type of music. * Unresonant, deadish acoustics. ^B Big bass. ^C Close-to highs with sharp edge. ^D Some distortion in highs. ^F Flattish high end; needs boost over normal playback. ^G From older 78 disc issues. ^H Piano is tinny, metallic. ^I Violin solo very close, big. ^J Will need bass boost over normal LP playback.

Big-orchestra stuff—light

Leroy Anderson Conducts, vol. 2. L. Anderson & His "Pops" Concert Orch.

Decca DL 7519

Do I detect a trace of hard-boiled Kostelanetz? Could stuff in this, added to Anderson's former delightfully warm, uncomplicated old-fashioned style? Has ye juke-box had its deadly effect on Anderson's spontaneity? Hope not.

© Rossini-Respighi: La Boutique Fantasque. Royal Opera Orch., Rignold. (Sadler's Wells). Decca DL 7518 (10*)

Pineapple Poll. a) Sadler's Wells Orch., Mackerras. ^f Columbia ML 4439

b) Royal Opera Orch., Lanchbery. © Decca DL 7521 (10*)

Gilbert & Sullivan ballet—though the Decca is the crisper and livelier, the LP is a wee bit hard on the ears; the relatively stodgy sound of the English EMI (Col.) is actually clearer, though unspectacular. (Col. has more music.)

© Famous Overtures—Offenbach. London Philharmonic, Martinon. London LL 350

© "New Year" Concert. (Strauss Waltzes). Vienna Philharmonic, Krauss. London LL 484

This department is again receiving Londons after 7-month hiatus. "Firr" technique is admirably standardized—these have the expected big, live sound, the string highs very close and edgy. Still a wonderful sound, but not the only style of "hi-fi" acceptable.

HARRISON AUDIO SHOP *features...*

Cabinart FOLDED HORN > CORNER ENCLOSURES

These compact, correctly proportioned Cabinart corner speaker enclosures will extend your bass response a full octave, with no cabinet resonance peaks!


Assemble it yourself in less than an hour, and save \$30.00! Only a screwdriver needed. Complete packaged KIT of precut and smoothly sanded solid 5 ply welded wood plus plastic grille cloth, all hardware, KIMSUL Acoustic insulation, plastic wood, glue and simple assembly and finishing instructions.

For 12" Speaker: 32 1/2" wide x 32" high x 16" deep, 26 lbs. Model 61.....


For 15" Speaker: 34" wide x 32" high x 17" deep, 28 lbs. Model 63.....

\$19.95

Also available completely assembled, with beautiful hand-rubbed finishes. Write for literature.



Using a Williamson ?? **Double your power output, and reduce distortion by 50%!!**



Use an **ACRO TO-300**

"The World's Finest Transformer," — and convert to Ultra Linear Operation by simply changing three* resistors and condensers!

- Response \pm 1 db 10cps to 100,000cps
- Rated to handle 40 Watts
- Resonance-free response
- Unequalled square wave response
- Low phase shift
- Most quality per dollar!

ACRO TO-300.....

\$24.75
net

*Conversion
Kit — \$1

ACRO TO-310 — Same ratings but 20 watt. For converting all popular 10 watt 6V6 amplifiers to the sensational Ultra Linear Operation.....

\$18.75

FREE! Write for 12 page ACRO data; Amplifier and conversion schematics

ACRO TO-290 for the Original Williamson Amplifier. Performance equal to the finest — regardless of price! **\$15.75**

All units fully potted in attractive grey hammertone case. Compact, only 3 1/2" x 3 1/4" x 4 1/4" high.

Harrison Has It!



KT-66

Plug a pair of these famous OSRAM KT66 tubes in your 6L6 sockets and, without any circuit changes, enjoy less distortion in your output! Can deliver 50 watts in continuous service, with longer life. Ideal for the Ultra Linear amplifier.

Harrison Has Them
for only **\$3.97** each

Special Value!

Filter **CHOKES**


High quality, conservatively rated for continuous duty. Potted in metal cases for up-right or inverted mounting. Lugs. Ideal for all amplifiers.

PA-100 12 Henry at 10 MA. 15 ohms. 3" x 4 1/2" x 4 1/2" high.

\$11.00 List value **\$3.49**
Special

PA-48C 75 Henry at 50 MA. 2500 ohms. 2 1/2" x 3" x 3" high.

\$10.00 List value **\$2.79**
Special



Hear your
Ultra Linear
(or any
amplifier)
at its best
with a

WHARFEDALE SPEAKER

Smooth 30 to 18,000 cycle response. High efficiency 12 watt power rating. 18 1/2 lbs! 15 ohm VC. Exclusive cloth suspended cone minimizes transient distortion and "boom".

SUPER 12/C.S./AL
Really worth more
but Harrison sells it **\$61.95**
for only.....

PUNCHED CHASSIS

for Williamson

Take the work out of building your Williamson with these completely drilled chassis for amplifier and for power supply. 7" x 9" x 2". Grey hammertone finish.

Both for only
\$5.75

Do you have any
Audio PROBLEMS?

Call or write Ben Pinz, our Audio Specialist, for friendly helpful advice. No obligation



HARRISON RADIO CORPORATION

227 GREENWICH ST.

NEW YORK 7, N. Y.

BArclay 7-7777

AUDIO ENGINEERING • MARCH, 1952



Conductor E. G. Keenan uses the Turner 9D on the Milwaukee Road's Midwest Hiawatha train.

FIRST IN FAVOR on the Milwaukee Road.. the 'TURNER HAN-D 9D!



Model 9D
List price \$28.50

Model 9X
List price \$23.50

Perhaps you don't own many trains in which you could install Turner 9D microphones, but chances are you're called on now and then to recommend a microphone for paging, public address, ham rig, mobile use or traveling mike broadcasting. In this event, you may be sure of your ground when you use or recommend the Turner "Han-D" 9D!

The Turner 9D is the handiest and most useful microphone made. Hang it, hold it, or mount it on any mike stand. It's carefully engineered for maximum response to voice, but also delivers smooth, natural response to music pickups. It will not blast from close speaking.

Drop it — kick it — freeze it — heat it — the Turner 9D will take more punishment per square inch than any microphone you ever owned — and continue to give superior performance. Positive contact slide switch permits on-off operation.

MODEL 9D DYNAMIC — Recommended for severe service conditions and extremes of climate and temperature. Level: 52 db below 1 volt/dyne/sq. cm. at high impedance. Response: 100-7000 c.p.s. Complete with removable 7-ft. single conductor shielded cable set. 50, 200, 500 ohms or high impedance.

MODEL 9X CRYSTAL — Equipped with high quality, shock-mounted, humidity protected crystal for indoor or outdoor use. Level: 52 db below 1 volt/dyne/sq. cm. Response: 60-7000 c.p.s. Complete with removable 7-ft. single conductor shielded cable set.



Write for
complete literature

THE TURNER COMPANY

929 17th Street N.E., Cedar Rapids, Iowa

IN CANADA—Canadian Marconi Co.
Toronto, Ont. & Branches

EXPORT—Ad. Auricoma, Inc.
89, Broad Street, New York 4

Crystals licensed under patents of the Brush Development Co.

^{ed} **Delibes: Sylvia; Weber: Inv. to the Dance; Ponchielli: Dance of the Hours.** Roy. Op. Orch. Rignold. Decca DL 9549

Again, would be a top hi-fi sound, with sharp, edgy highs, except for some distortion in the LP transferral, not-too-good surface. A close miss—other pressings may be better.

Curtain Time, Morton Gould & His Orch. Columbia ML 4451

Big, live sound, the arrangements, with G. at piano, mostly strings, slick-smooth; hence not hi-fi-spectacular.

^o **Tati-Tati. (Symph. Paraphrases on Chopsticks).** Col. Symphony, Janssen. Columbia ML 4480

If you haven't got this—own it! Superb recording job in every way and most entertaining as well. (19th C. Russian composers.)

² **Waltzing with Waldeufel. Strauss Polkas, vol. 2.** Boston Pops Orch., Fiedler. RCA Victor LM 1226

Ye old story—use full bass boost and this sounds roughly like others with normal bass. Sharp, good high edge, rather distant pickup.

Gershwin: An American in Paris. ^{ed} **Rhapsody in Blue.** Andre Kostelanetz & His Orch., Alec Templeton, piano. Columbia ML 4455

Big Concerto Style

² **Liszt: Todtentanz (Dance of Death).** ² **Franc: Symphonic Variations.** Brailowsky; RCA Victor Symph., Reiner; Morel. RCA Victor LM 1195

Tremendously noisy Liszt Variations on the ominous chant, "Dies Irac," with hard, skeleton-like pianism from Brailowsky. The Franc is hardly as juicy as it should be, lacks the proper perfume.

^{as} **Rachmaninoff: Piano Concerto #3.** Horowitz; RCA Victor Symphony, Reiner. RCA Victor LM 1178

Full bass boost on this still leaves the lower end thin-sounding! Why? This piece is mostly piano—the orchestra hardly breaks through. Rather muffled sound, the piano big but somewhat metallic.

^{de} **Brahms: Violin Concerto in D.** Peter Rybar; West-Austrian Radio Orch., Moltkau. Concert Hall CHS 1113

The smaller outfits now are invading the big-time symphonic field; they are unwise. This kind of music takes top stars, the biggest conductors and fanciest orchestras, to match the expected performances known already so well. This job is distinctly under that sort of par, both in the playing and in the recording set-up.

^(d) **Tchaikowsky: Piano Concerto #2.** Mewton-Wood; Winterthur Symphony, Goehr. Concert Hall CHS 1125

^{de} **Tchaikowsky: Piano Concerto #3, Op. 75; Concert Fantasy, Op. 56.** Mewton-Wood; Winterthur Symphony, Goehr. Concert Hall CHS 1126

Different story here; none of these is commonly heard and the performances, though a bit ragged, are good. Excellent basic mixing and fine balance, good piano, but loud parts are somewhat distorted in the 2nd Concerto and badly distorted in the 3rd Concert Fantasy record. Something badly overloaded. (Probably on original tape, alas.) Other pressings just might be different—worth a try, since the music is interesting and novel.

Some Mozart and Haydn

^o **Mozart: Sinfonia Concertante (Double Concerto) for violin and viola, K. 364.** W. Barylli, vl., Paul Doktor, viola; Vienna State Opera Orch., Prohaska. Westminster WL 5107

Probably the most brilliant hi-fi Mozart record made so far—and one of his most wonderful works to boot. A terrific string brilliance here, but without distortion, the highs close-to, yet in a big,

golden liveness, the solos ideally balanced with the orchestra, the whole a scintillating, jewel-like effect of glittering realism.

Haydn: Symphonies #99, #101 ("Clock"), Vienna State Opera Orch., Scherchen, Westminster WL 5102

Hi-fites will know at least a half-inch—those famous drums—of Scherchen's first LP in this series! Those who have played the rest of the record (an excellent indication, *ahem*, of where your heart lies) may be delighted by this latest, the fourth. Scherchen is doing a powerful reevaluation of these late Haydn symphonies, bringing out in them both a strong, virile Romanticism that has long been out of style, Haydn being by old convention, "Papa" Haydn and all frills and furbelows, and at the same time showing, with tremendous recording to help, that Haydn also retains very much of the splendid, brilliant, massive sound of the Baroque (Bach) period that came just before. Makes a big difference—too long these have been treated as cute little virtuoso concert certain-raisers. Nobody could think them that in these stunning recordings! Try also #103, on WL 5050. Only possible rival technically to these is London's "Clock," and others, on fire.

Mozart: Piano Concerto #25 in C, K. 503, Carl Seeman; Munich Philharmonic, Fritz Lehmann, Decca DL 9568

The masterly touch of Lehmann (Lotte's brother) makes the orchestral part of this solid, unharried concerto a delight, and Carl Seeman's light footed, rather staccato piano is good too. Nice record, though due to modestly distant pickup and Seeman's quiet piano it won't howl over the tin ears. Variations on Gluck theme (piano alone) are an amusing addition, to fill out side 2.

Haydn: Symphonies #94 ("Surprise"), #103 ("Drum Roll"), Royal Philharmonic, Beecham, Columbia ML 4453

Contrast this Beecham Haydn, best of the older style interpretation, with the above Scherchen's. Musically ultra-accurate, but rather complacent, too arch, with a big-orchestra sound that is muddy, rather than impressive. Recording is good average, impeded (for our machines) by unboosted British highs, extra bass (300-cps turnover). Adjust accordingly.

Mozart: Divertimento #7 in D, K. 205; Cassation in B Flat, K. 99, Salzburg Mozarteum Orch., Paul Walter, Period SPLP 528

"Incidental" or "background" music, cross between orchestra and "chamber" style and a type to get to know, K.205 is for small string orch. and two horns, the early (aged 13) K.99 for same plus two oboes. Both have very lovely melody, unobtrusive charm. Musical, if a bit unevenly played; some distortion (a bit of noise modulation, somehow) but won't bother you much.

Mozart: Wind Serenades #11 in E Flat, K. 375, #12 in C Minor, K. 388, a) Kell Chamber Players, Decca DL 9540 b) Members Vienna Philharmonic, Westminster WL 50-21

More of same, all wind, and a lovely sound when you get used to it. Two superb jobs, same two pieces. Decca's (Kell) is smoother, more polished, the Vienna Westminster playing slightly more plastic and colorful; both are tops. Decca is lower level, but less well defined, but good. Note Westminster has had this re-cut from original tapes, with considerable improvement. Look for "stv" (Columbia processing) on new edition's record face.

Mozart: Piano Sonata in D, K. 576 ("Trumpet"), Wm. Schatzkammer, RCA Victor LM 156 (1/2 10")

Mozart: Piano Sonatas in C, K. 279, in F, K. 280, Florencia Raitzin, R.E.B. #4

A puzzle to many, pianists as well as listeners, the Mozart sonatas are "explained" when you understand that they were never intended for our modern piano but for a smaller, yet more brilliant instrument, with a slivery, twangy treble and a soft, harp-like bass. Modern players must avoid loud, swaggering playing, yet somehow achieve the brilliance and fullness of the harpsichord-like original. Almost impossible, without imagination

WHY WQXR DEPENDS ON G-E HIGH FIDELITY EQUIPMENT



Professionals Rate G-E Audio Equipment Unsurpassed For Tone Clarity. Home Installations Growing Rapidly

WQXR, the radio station of The New York Times, backs up its enviable reputation by using the finest audio equipment available. Elliott Sanger (above), Executive Vice-President of the station, reports:

"Our high standard of quality in record reproduction is maintained by the General Electric Cartridge and Diamond 'Baton' Stylus."

In use at no less than 14 different locations at WQXR, these G-E products help to bring you the remarkable fidelity of sound for which this station is famous.

Did you know that you can have G-E equipment like this in your home phonograph or sound system? The cost is reasonable, the enjoyment almost limitless. Ask your G-E dealer. Meanwhile, fill out and mail the coupon for free catalog.



FAMOUS TRIPLE PLAY CARTRIDGE—(RPX-050) plays 33, 45, 78 rpm records without changing its position in the arm. Simply depress and turn red button to change stylus, which is replaceable.



G-E 1201 HIGH FIDELITY SPEAKER—Frequency response of 50 to 13,000 cycles. Large Alnico 5 permanent magnet, aluminum base voice coil. This speaker is ideal for high fidelity applications.

General Electric Company, Section 4432, Electronics Park, Syracuse, N. Y.

Please send me, without obligation, your new full line Phonograph Accessories folder.

NAME _____

ADDRESS _____

CITY _____


STATE _____



GENERAL ELECTRIC

The New Astatic "TWIN CAC" THE INDUSTRY'S FIRST MAJOR ADVANCEMENT IN TURNOVER TYPE PICKUP CARTRIDGES

... FITS MOST OF
THE POPULAR CHANGERS

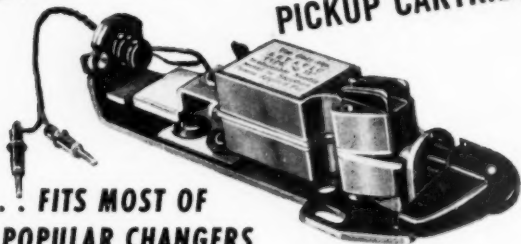

INTERACTION between the two needles has long reduced the performance quality of conventional designs in turnover pickup cartridges. Another difficulty has been that, if output and response characteristics are made ideal on one side, for one record type, reproduction on the other side is poor; so a compromise has to be made. It took a revolutionary new design in turnover cartridges to eliminate these problems . . . and that is exactly what Astatic engineers have come up with. The new "Twin CAC," Astatic cartridge model CAC-D-J, is the first turnover unit offering unlimited reproduction clarity, fidelity and brilliance of tone. It is the equal of the finest single-needle cartridge of them all, Astatic's own famous CAC-J.

FEATURES

- 1 Basic design principle combines two complete CAC assemblies, back to back, on a common plate.
- 2 Output and response characteristics of each side established independently of the other: 0.8 volt at 1 kc. on Audiotone 78-1 Test Record and 0.7 volt on RCA 12-5-31-V Test Record. Frequency range, 30 to 11,000 cycles.
- 3 Needles are, of course, entirely independent of each other, free of interaction. Needle pressure, 10 grams.
- 4 Unique but simple switching device in turnover mechanism connects only the cartridge or side being used to amplifier phonograph input.
- 5 Furnished complete with turnover bracket and knob assembly, with standard $\frac{1}{2}$ " mounting holes. Wiring terminating in pin connectors, graduated for two dimensions now standard on lead wire connectors. Easily installed without soldering.
- 6 Equipped with Type Q (3-mil) and Type Q-33 (1-mil), sapphire tipped needles.

Write for complete details on the new Astatic "TWIN CAC" Turnover Cartridge. Ask also about the various new Astatic Pickup Models now available complete with this superb new cartridge.

EXPORT DEPARTMENT
401 Broadway, New York 13, N. Y.
Cable Address: ASTATIC, New York



Astatic Crystal Devices manufactured under Brush Development Co. patents

on the listener's part! Schatzkammer does an average, amiably so-so job on his part, with a bit of the usual feeling that these are a sort of miniature "exercise," which they decidedly are not. Raitzin, with great advantage of training under Landowska, may sound thin and distant—but close listening shows up a superb shaping and accuracy of detail.

If you want to hear the actual Mozart piano—a lovely thing—try this, by a composer, American-German, who might be Mozart himself for all most of us can tell. Same style of careful playing, on the actual Mozart instrument:

Reinagle: Sonata for Early Piano. Arthur Loesser, piano built (by Challis) to duplicate piano of 1790-1800).

New Records NRLP 2006 ($\frac{1}{2}$ 10")

EQUIPMENT REPORT

[from page 30]

with five different characteristics being provided. Two characteristics are available for the radio inputs, the AM position having a roll-off to reduce noise in locations remote from broadcasting centers. However, AM radio can be played in the FM position, if desired, since there is only one input for radio, the switch selecting this input on two positions—one marked FM with flat response, the other marked AM, with the high-end roll-off. Tone controls are well designed, and have a definite center position for flat response; the volume control is compensated for low-level reproduction. Listening quality is excellent on both radio and phono, and the operation of the selector-equalizer switch is simplified enough for the non-technical operator.

The following table shows the signal voltages for the various inputs for an output of 1 watt:

SIGNAL INPUT VOLTAGES for 1-watt output

(1000 cps, volume control maximum, tone controls "flat")

Input	Selector	Voltage
LO Radio	FM	0.18
HI Radio	FM	1.2
LO Radio	AM	0.22
HI Radio	AM	1.4
Crystal PU	LP	0.36
LO Mag PU	LP	.0036
HI Mag PU	LP	.011



The National Society for Crippled Children and Adults, Inc.
11 S. LaSalle St., Chicago 3, Ill.
The Easter Seal Agency


Audio in the Home

William C. Shrader*

A COMPLETE HOME MUSIC installation should include some kind of radio tuner, if sufficient versatility of entertainment is to be had. While many users will already have a good AM tuner, and will prefer to retain it as the basis of the radio section, it may be desired to add an FM tuner somewhere in the installation.

The physical mounting of the tuner is a problem which will have to be solved by each individual, for it depends largely on the availability of space. If a separate speaker is to be used, it may be possible to locate the tuner in the speaker compartment which has ther been vacated, even though it may not be convenient to tune.

Electrically, the problem is a bit simpler, because many of the later sets have FM or TV jacks on the back, and are usually provided with a switch to select the program source. If there are no jacks, one may be installed, together with a double-pole-double-throw (DPDT) switch—one circuit switching the signal lead and the other shorting out the unused circuit. This may be done by removing the lead from the "high" side of the volume control and connecting it to one of the outside contacts of the switch, as shown in the figure. The lead from the new jack is connected to the other outside contact of the switch,



and the arm is connected to the volume control terminal from which the lead was removed. The other points on the switch are connected as shown, and the switch then serves to short out the AM signal when listening to FM, and vice versa. Cloth- or rubber-covered shielded lead should be used for this wiring, with the shield connected to the chassis. If the FM set must be mounted at any great distance from the radio, low-loss microphone cable should be used for the connection to prevent the loss of high frequencies due to the added capacitance of the cable.

Further "solutions" to the problems encountered in the search for good music reproduction will be discussed in this section next month.

Addition of jack and DPDT switch and wiring changes shown will permit selection of either AM or FM tuner with minimum of effort.

*2803 M St., N. W., Washington 7, D. C.



TESTING OF MUFFLERS at the Donaldson Co., St. Paul, Minn., is simplified with recording equipment tailored to the job by Donaldson engineers. Comparative performances recorded on tape can be played over and over again for analysis.

Sound Recording problems? 3M Engineers can help you!

Technical assistance on every phase of sound recording is yours for the asking from the 3M Service Organization. This group of over 100 sound engineers has had wide experience with radio, television and industrial users of sound recording equipment. Backed by the extensive facilities of the 3M Laboratories,

they're ready to help with your recording problems, show you shortcuts and new techniques, assist in the selection of equipment.

Call your local 3M Service Representative today . . . or write us direct: Dept. AE-32, Minnesota Mining & Mfg. Co., St. Paul 6, Minn. No obligation, of course.

**HERE'S WHY RECORDING ENGINEERS USE MORE
"SCOTCH" SOUND RECORDING TAPE THAN
ALL OTHER BRANDS COMBINED**

- Lower noise level than any other tape
- Greater output sensitivity than any other tape
- Better reel-to-reel uniformity than any other tape
- Erases cleaner than any other tape
- No curling or cupping—always lies flat on head
- Lubricated for longer tape life



The term "SCOTCH" and the plaid design are registered trademarks for Sound Recording Tape made in U.S.A. by MINNESOTA MINING & MFG. CO., St. Paul 6, Minn.—also makers of "Scotch" Brand Pressure-sensitive Tapes, "Underseal" Rubberized Coating, "Scotchlite" Reflective Sheeting, "Safety-Walk" Non-Slip Surfacing, "3M" Abrasives, "3M" Adhesives, General Export: Minn. Mining & Mfg. Co., International Division, 270 Park Avenue, New York 17, N. Y. In Canada: Minn. Mining & Mfg. Co. Canada, Ltd., London, Canada.


NEW PRODUCTS

• **Sealed Selenium Rectifier.** Quick Replacement and effective protection against moisture, fungus, and corrosive atmosphere, are features of a new line of miniature selenium rectifiers recently introduced by International Rectifier Corp., 1521 E. Grand Ave., El Segundo, Calif. The new units are sealed in metal cases filled with inert gas and are fitted with standard tube-socket bases. Complete engineering and application data will be supplied upon written request to the manufacturer.




duced by International Rectifier Corp., 1521 E. Grand Ave., El Segundo, Calif. The new units are sealed in metal cases filled with inert gas and are fitted with standard tube-socket bases. Complete engineering and application data will be supplied upon written request to the manufacturer.

• **Improved Audak Cartridge.** Virtual elimination of needle talk and the record wear of which it is a symptom have been accomplished in the new Audak Chromatic Polyphase pickup. Successful attainment of near-zero mass and near-infinite compliance assures complete groove control over stylus movement. According to the manufacturer, even soft master discs can be played repeatedly.



with the Chromatic without perceptible wear. The unit is supplied as a turnover-type cartridge with sapphire for playing standard 78's and diamond for playing LP's. Literature will be mailed free by The Audak Company, 599 Fifth Ave., New York 18, N. Y.

• **Economical Turntable Assembly.** Introduced to meet the demand for a moderate-priced single-play turntable stimulated by the growing popularity of LP records, the



new Garrard Model M is sturdily constructed around a heavy-duty four-pole motor which offers exceptional freedom from both hum and rumble. Also equipped with weighted turntable and the Garrard "parallel lift" tone arm. The Model M is supplied as standard with interchangeable plug-in shells, similar to those supplied with the Garrard RC-80 record changer, making it possible for the purchaser to use the crystal or magnetic cartridge of his choice. Further details will be supplied free upon written request to Garrard Sales Corporation, 164 Duane St., New York 11, N. Y.

• **High-Quality Speakers.** Illustrated below is Model CO12JB, a co-axial 12-in. speaker representative of the new line of wide-range units recently introduced by Oxford Electric Corporation, 3911 S. Michigan Ave., Chicago 15, Ill. Other models range in size from 8 in. to 12 in. and in power handling capacity from 10 to 25 watts. Voice coil impedance of all



models is 8 ohms. The CO12JB is a 10-watt unit and has a frequency range of 65 to 15,000 cps, with crossover at 4000 cps. Designed for eye as well as ear appeal, the new Oxford speakers are attractively finished in two-tone hammerloid. Available now through many leading jobbers. Illustrated literature will be mailed free upon request to the manufacturer.


• **High-Quality Tape Recorder.** Superior audio quality, portability, and push-button operation combine to make the new Ampex Model 400-A an ideal unit for discerning homes, or for application where highest professional standards prevail. Available



for either half-track or full-track recording, the 400-A can be operated at either $7\frac{1}{2}$ or 15 in./sec. as controlled by a speed selector switch. The Model 400-A differs from the earlier Model 400, which it supersedes, in the fact that all mechanical motions are operated by solenoids under push-button control. Starting interval is


0.1 second. Frequency response is down no more than 4 db at 30 and 15,000 cps at 7½ in./sec., and within ±2 db 50 to 15,000 cps at 15 in./sec. Noise level is 55 db below the 2 per cent total harmonic distortion level. Full information will be supplied by Ampex Electric Corporation, Redwood City, Calif.

• **Preamplifier - Equalizer.** Recommended compensation for all types of recordings is combined with a high degree of flexibility in the new Brocner Model A100 preamplifier-equalizer. Operating controls provide positions which cover the original Columbia LP curve, the RCA-Victor LP curve, both old and modern 78-r.p.m. discs, and AES and NAB settings. Supplied with the unit is a list of recommended settings



for various makes of records. Independently adjustable turn-over and roll-off controls permit 24 different frequency characteristics. The A100 is a three-stage triode amplifier equipped normally with an adapter power plug which fits under beam-power output tubes. Triode adapter available on request. Model A100P contains integral power supply. Both models are supplied with brushed-brass designation plates for front-of-panel mounting. Brocner Electronics Laboratory, 1546 Second Ave., New York 28, N. Y.

• **Heathkit Williamson-Type Amplifier.** Audio enthusiasts with whom economy is an item which must be considered along with quality will be enthused over the newest "Heathkit" — a Williamson-type amplifier complete with power supply and preamplifier-control unit. Priced remarkably low, the amplifier follows closely the circuit of the Musician's Amplifier, described originally in the November, 1949 issue of *RE*. The preamplifier contains three input channels, two low-gain for crystal pickup and tuner, and one high-gain with equalization for magnetic pickup. Selector switch provides choice of turnover for 78 r.p.m. or LP recordings. Bass control permits up to 15 db boost or cut at 20 cps, and treble control provides up to 15 db boost or cut at 20,000 cps. Frequency response of the power ampli-



fier is flat within one db from 10 cps to 100 kc. Harmonic distortion is less than 0.5 per cent between 20 and 20,000 cps at five watt output. Intermodulation at five watts is 0.5 per cent using 600 and 3000 cps. The Heath Company, Benton Harbor 25, Mich.

AUDIANA

[from page 14]

consequently the stylus tends to pull sideways across the groove. By using a bent arm, and so mounting the arm that the stylus overhangs the turntable pivot by a small and predetermined amount, tangency may be improved throughout the arm travel. There remains, however, a force which tends to cause the pickup to move toward the center of the record. The result is that the inside wall of the groove is worn more than the outside.

Aside from the uneven wear on the groove, this side thrust also causes a certain amount of distortion in the reproduced signal, and this is of even greater importance than the wear—for records can be replaced after they become too worn for good quality.

All of the dimensions of the pickup arm and of its mounting are capable of being calculated accurately, and the tracking error—referred to by the Greek letter α —can be made a minimum over the entire motion of the arm. The remaining distortion, even when reduced as much as is possible practically, still will be of the order of one per cent.

For this reason, the instructions which usually accompany a pickup and arm are quite specific about the manner in which the mounting should be made. It will be noted that the vertical axis of the arm's mounting should be placed at a certain specified distance from the center of the turntable, and in this position the stylus will pass in front of the center pin of the turntable by an amount varying from one-quarter to one-half of an inch. These dimensions are quite critical, and if the user wishes to reduce tracking distortion to a minimum, the instructions for mounting the arm should be followed closely.

The amount of the overhang depends upon the length of the arm and the angle the head is offset. This would appear to indicate that it is most desirable to use a pickup with the arm supplied by the manufacturer, unless it is determined that the arm is designed specifically for the pickup to be used. This suggestion applies only to those pickups which have the offset built into the pickup mounting. If the offset is a part of the arm itself, the instructions accompanying the arm should make clear whether or not the length of the pickup—and consequently the relative position of the stylus and the arm pivot—would make any difference in the mounting dimensions.

In the absence of any specific dimension for mounting, it is possible to determine with a fair degree of distortion-reduction a positioning which will be passable. This is most readily done by affixing a right triangle along the axis of the pickup with the corner directly above the stylus, and with one leg of the triangle extending toward the center of the turntable. By holding the base of the arm firmly against the motor board, and moving it slightly backward and forward, a position will be found where the edge of the triangle deviates a minimum distance from the center of the turntable pin. This will usually result in minimum distortion over the record area.

The Discriminating Eventually Come to Leonard's!


Build Your Own Modern Horn Enclosure

Kits by CABINART make finer Folded Horn Enclosures

Enjoy Better Sound

Gain a full octave of clean bass that is never reproduced by ordinary cabinets . . . Assemble your own folded horn from a pre-cut CABINART Kit.

All materials included.



Kit Includes:

- Lumber cut to size
- Baffle pre-cut for 12" or 15" Speaker
- Grill Cloth
- Hardware
- Plastic Wood • Glue
- Kimsul Acoustic Insulation
- Assembly Instructions
- Finishing Instructions

Model 61	12" Speaker	\$19.95 Net
Model 63	15" Speaker	\$23.95 Net

BROWNING FM-AM TUNER

Model RJ-12C

Proportioned for easy mounting in book-cases, drawers, shelves, and cabinets. Automatic Frequency Control assures correct tuning on FM. Disabled at the flick of a switch! Receives FM band, 88-108MC; Standard band, 530-1650 KC. Separate RF and IF systems on both bands for maximum performance. No coil switching. Less than 10 microvolts needed to

produce 30 DB noise reduction in FM band. Sensitivity of 5 microvolts in AM band. FM audio response 15-15,000 cycles $\pm 1\frac{1}{2}$ DB. AM audio response 20-6,600 cycles ± 3 DB. Triple Tuned IF's. Phono-TV-Recorder positions in channel selector switch provide volume control on Tuner. Three signal inputs at back of Tuner. Armstrong FM circuit. Tubes: three 6AU6, one 12AT7, one 6SK7, one 6SG7, two 6SJ7, one 6H6, one 6SA7, one 6J6. Tuning eye 6AL7GT, one IN54 crystal detector. Height 7 $\frac{1}{2}$ " , width 13 $\frac{1}{2}$ " , depth 9".

Model RJ-12C Net \$129.21

Power Supply PF-12 Net \$16.88

The "EDITALL" Tape Splicing Block

Designed by Joel Tall, and based on his years of experience as tape editor for CBS, the block eliminates the use of holding clips or similar devices. Thus it allows tape editors and sound men to splice tape easier, faster, and with less fatigue. Can be used in conjunction with any tape recorder using standard tape Net \$6.50

PICKERING 132 E Record Compensator
Permits proper compensation for micro-groove and standard records, domestic and foreign. Net \$12.00

Mail Orders filled promptly!

NEW BIG CATALOGUE NO. A3: You'll want our new 48 page Catalogue No. A3, featuring the latest and finest in equipment for audiophiles. Just drop us a postcard, or phone: CORTLANDT 7-0315

Leonard Radio inc.

the house
built on
SERVICE

69 CORTLANDT ST., NEW YORK 7, N. Y.

HARVEY for the finest in SOUND EQUIPMENT

"Unfinished" CONSOLE CABINETS FOR ECONOMICAL HOME INSTALLATIONS



Here is amazing sturdiness and finished quality of construction, normally attained only in consoles costing many times this price.

Both cabinets are built of 3/4 inch laminated fir, securely joined for years of lasting service. The "unfinished" surfaces have been sanded to table-top smoothness, ready to take whatever finish you select for room harmony. Each cabinet has been designed for utmost ease and flexibility in installation of equipment. Each measures 23" wide, 16" deep, 33 1/2" high.

MODEL 70—Designed to house amplifier, pre-amp, tuner, power supply, etc. Has removable panels for knob controls and tuner pushbutton, plus removable changer board and a hinged cover for immediate access to record player.

MODEL 71-12—Bass-reflex cabinet, ready for mounting 12" single or co-ax speaker. Speaker and port openings are attractively grilled.

MODEL 71-13—Same as above, but for 15" speaker.

Net \$34.00

HARVEY STILL HAS AVAILABLE

Altec 604B Speakers
Electro Voice, Lansing Stephens
Western Electric 755A Speakers
others, etc.

In fact, we have almost all of the better grade speakers at the right prices. All with Alnico 5 PM Fields. Come in now, or order by mail... get your quality speaker while it is still available.

MAGNACORD SERIES 6 RECORDERS AND AMPLIFIERS



PT6-1A Recorder and Amplifier... the only combination that offers such high professional quality at such a low price. Includes PT6-A Recorder plus Amplifier with low impedance microphone and bridging inputs, 10 watt audio amplifier with monitor, speaker and jack for external speaker, 600 ohms balanced line output terminal.

PT6-1A—Magnacord Combination with high speed forward

PT6-AH—Recorder with high speed forward

PT6-J—Amplifier

McINTOSH AMPLIFIERS

We have McIntosh Amplifiers in stock for immediate delivery. Full information on request, or come in (if you're in town) for a demonstration.

20 W-2 Amplifier \$149.50
50 W-2 Amplifier 249.50
AE-2 Equalizer Pre-Amp 74.50



Complete Line of CANNON Plugs and Connectors carried in stock for immediate delivery.

CANNON plugs have been standard equipment for more than 15 years wherever a high quality connector is required for low level sound transmissions or for general electrical and electronic use. You'll find them in quality microphones, sound systems, radio and TV stations, etc. CANNON is definitely a "must" for you. Write for literature and prices for connectors to fit your requirements.

VISIT THE AUDIO-TORIUM

Come in and visit our new sound department... all these items and many more on working display at all times.

Telephone **hrc** Litzberg 2-1580

HARVEY
RADIO COMPANY, INC.
103 West 43rd St., New York 18, N. Y.

NOTE: In view of the rapidly changing market conditions, all prices shown are subject to change without notice and are list, F.O.B., N.Y.C.

HORN-TYPE LOUDSPEAKERS

[from page 23]

tions with consequent resonances and standing waves. The problem, then, is to reduce the magnitude of these resonances to a small value. They cannot be entirely eliminated because no horn of practical size can effect a perfect impedance match with the interior of the usual room.

Fortunately, this problem is not quite so serious as it seems. Most horns are used in rooms which themselves exhibit several resonant modes of vibration. The standing waves which result from room resonance are not ordinarily considered objectionable. Actually, horn resonances can be reduced to the point where they are masked by room resonances. When this is done the results are superior to those obtained from loudspeakers without horn loading.

There are three practical ways in which the effects of horn resonances can be reduced in loud-speaker systems. First, the horn structure can be made as large as practicable. Second, two or more rates of flare can be used in different sections of the horn. Third, the horn can be placed in the corner of the room so that the floor and walls will form a virtual horn which extends into the room itself. The last expedient is very effective in increasing the virtual mouth area. In most cases it provides the best possible impedance match between the generator (driver) and load (room).

Practical Considerations

The foregoing paragraphs have shown the most important theoretical considerations which govern the performance of horn-type loudspeakers *once the several design constants have been chosen*. However, it is usually impossible to assign numerical values to the design constants on the basis of theory alone. A loudspeaker is, among other things, an article of furniture and practical considerations of size and appearance must be taken into account as well as acoustical performance. Sometimes compromises must be made in order to fit equipment into available space. It is the purpose of this section to discuss the practical construction of horn speakers. This can best be done by describing the constructional features of two horn speakers built by the writer for which data are available. The two examples chosen for description are quite different in conception and will serve to illustrate the major requirements which must be met in any system. One of these horns is described in the following paragraphs, and the other follows next month.

Several years ago Olson and Massa³

³ Harry Olson and Frank Massa, *J. Acous. Soc. Am.* Vol. 8, No. 1, p. 48, 1936.

Harry Olson, "Elements of Acoustical Engineering," 2nd ed., Van Nostrand, New York, 1947.

described in the literature a loudspeaker employing two horns and one motor. The low-frequency horn was coupled to the rear of the cone and the middle- and upper-frequency horn was coupled to the front of the cone. Later there appeared in the literature a description of the now familiar Klipsch horn which employed the corner of the room in order to extend the dimensions of the virtual horn. The speaker to be described is a modification of the Olson-Massa design and incorporates the room-corner feature. Although the speaker was built several years ago its performance is still considered excellent. It compares favorably with more recent designs which are vastly more expensive. Using the writer's speaker as a prototype, other constructors have built similar units and have reported excellent results.

Figure 2 shows the main constructional features. The eight-inch cone is mounted near the top, secured to a vertical mounting board about half way back from the front of the structure. A short horn extends forward from the cone. Behind the speaker mounting board is the speaker chamber. The low-frequency horn connects to the lower portion of the speaker chamber and the mouth of the horn is at the front of the structure near the bottom.

For the sake of clarity some of the details are omitted from Fig. 2 and are shown in Fig. 3. (A) in Fig. 3 shows


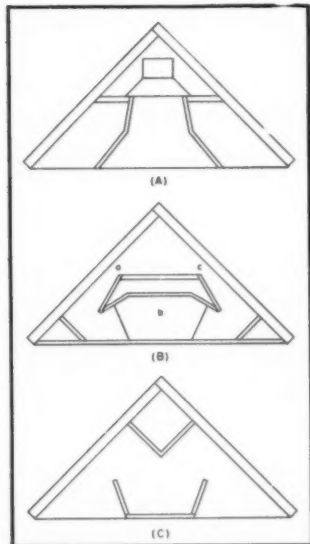


Fig. 3. Details of top (A), center (B), and bottom (C) sections of the duplex-horn speaker.

the plan of the top section of the structure. This section includes the cone, the high-frequency horn, and the upper part of the chamber. (B) shows the plan view of the center section which comprises the lower part of the chamber, the throat, and part of the low-frequency horn. (C) shows the lower section of

For a Glorious **BIG TONE** ON ANY STRINGED INSTRUMENT *specify the Genuine* **AMPERITE "KONTAK MIKE"** THE ONLY NO-DISTORTION "KONTAK MIKE"

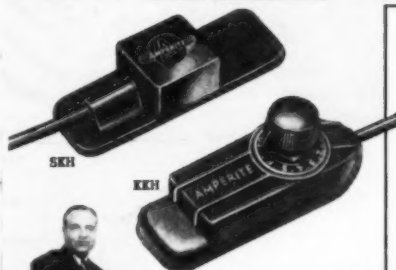

Anthony Antona, widely known as "the most versatile artist of the frets", is an enthusiastic user of Amperite Kontak Mikes.

Used with most amplifiers, including most electric guitar amps.

No changes in amplifier, instrument, or strings. Attached without tools.

The Amperite "Kontak Mike" improves the tone and volume of any Stringed or Fretted Instrument — also Pianos, Accordions, Harmonicas, etc. It is the only "Kontak Mike" that does not introduce peaks or distortion.

Model SKH, hi-imp List \$12.00
Model KKH (with hand volume control) List \$18.00

AMPERITE STUDIO MICROPHONES at P. A. PRICES!

Ideal for **CLOSE TALKING**
or **DISTANT PICKUP**

You can shout right into it, or stand away; in either case, the quality will be perfectly natural.

Model RBLG (200 ohms) List \$42.00
Model RBHG (hi-imp) List \$42.00



AMPERITE CAROID DYNAMIC MICROPHONE

Models PGH-PGL List \$32.00



SPECIAL OFFER:
Write for Introductory
Offer, and 4-page
Microphone Folder 53-M.

AMPERITE Company, Inc.

561 Broadway • New York 12, N. Y.

In Canada: Atlas Radio Corp., Ltd., 560 King St., W., Toronto 28

GOOD NEWS TO MUSIC LOVERS — EXTRA PROFIT TO YOU

BELL Custom HIGH FIDELITY AMPLIFIER

with complete Remote Control

Model 2145-A

This unique, new Bell High Fidelity Amplifier adds the master touch to any type built-in or custom audio system. Its remote controls, in an attractive unit for table or console mounting, are amazingly selective. Include single selector for phono—AM, FM radio (or TV), all domestic and foreign records, 78, 45, and 33-1/3 rpm; also compensated volume control; plus smooth, continuously variable bass and treble with boost and cut. All-triode amplifier, 30 watts maximum, reproduces sound at all levels, naturally clear and life-like.



Frequency response plus or minus .25 db to 20 to 30,000 cycles. Distortion at normal listening levels is less than .2 of 1%. Elements can be separated 5 to 25 feet with only .1 db loss at 20 kc. All inputs (3 phono, 1 mike, 2 radio) connect directly to the main amplifier. For more details, write.

Also Ask About Bell's lower cost Hi-Fi Amplifier Model 2122-A.

BELL SOUND SYSTEMS, INC.

599 Marion Road, Columbus 7, Ohio

Export Office: 401 Broadway, New York 13, N. Y.



Authoritative and Enlightening ...



*Acknowledged the Leading Publication
in the Field of Sound Reproduction*

If you are novice, hobbyist, experimenter, or engineer... if you are a lover of music... and in pursuit of sound, undistorted... Audio Engineering will be your faithful, reliable companion all the way. You will find no more pleasureable and stimulating reading than there is in AE; absorbingly interesting material, valuable and authentic data, workable detailed instructions... all comprehensively and yet practically presented.

"What to Do" and "How to Do" will guide your every move through this thrilling experience we call Audio.

Each new issue brings New Ideas, New Slants, and Latest Developments... month in and month out... twelve times a year.

BE SURE to get your copies REGULARLY.

MAIL this
Coupon
NOW

AUDIO ENGINEERING
342 Madison Avenue, New York 17, N. Y.

Enclosed is ☐ Check ☐ Money Order for \$
Please send a copy of each new issue of Audio Engineering for the next
☐ 12 months, ☐ 24 months to:

Please Print

Name

Address

City

Zone

State

Subscription Price: U.S.A., Canada and Pan American Union: 1 year
\$3.00 2 years, \$5.00. Other countries: 1 year, \$4.00 2 years, \$7.00.

the structure, comprising the remainder of the low-frequency horn.

The functions of the various partitions can best be explained by tracing the path of the low-frequency horn. As shown in (B) of Fig. 3, the throat is in two parts: one half is at *a*, the other at *c*. The first portion of the horn consists of two parallel paths, from *a* to *b* and from *c* to *b*. The paths converge at *b* and immediately pass down into the bottom section through the hole at *b*. The horn then splits into two parallel paths, each of which opens separately at the front of the bottom section, as at (C) of Fig. 3.

The effective length of the low-frequency horn is about 45 inches. The total mouth area is about 360 square inches and the total throat area is about 38 square inches. Considerable liberty was taken in the rate of flare in the interest of simpler construction. However, the average rate of flare provides for a theoretical low frequency cut-off at about 52 cps. Eqs. (1) and (3). This should not be taken too seriously, however, since finite horns radiate appreciable energy at frequencies less than cut-off. This particular speaker, for example, produced fundamentals of 16 cps with considerable intensity. This was the lowest frequency available from the test oscillator. (No claim is made for "flat" frequency response at these low frequencies.)

Interference Effects

It was mentioned earlier that a folded horn does not radiate efficiently at higher frequencies where interference effects exist because of differences in path length. For this reason, the upper limit of the low-frequency horn should be determined before the other horn is designed and built. There is no simple way to compute what this upper limit is; it must be measured after the horn is in operation. A convenient method is to block off the radiation from the front of the cone with absorbing material (pillows, blankets, etc.) and check the operation of the low-frequency horn with an oscillator connected to the driver. Once the approximate upper frequency is determined, the high-frequency horn can be designed to complement the characteristics of the larger horn.

The two vertical boards which comprise the outside "vee," Fig. 3 are cut from 3/4-in. plywood. The speaker mounting board is made of 1/2-in. plywood. All other partitions are 1/4-in. plywood. All joints are nailed, glued, and reinforced with cleats. A portion of the top is secured by screws to permit access to the cone. The resulting structure is very sturdy. The inside horn surfaces were given several coats of thin shellac and sanded between coats. The resulting surface is very hard. The internal damping of the wood partitions is sufficient to eliminate all but a trace of vibration.

Experiments on this and other units have demonstrated conclusively that the use of thicker wood is no guarantee of reduced horn vibration. One speaker similar to the one described here was

built of $\frac{3}{4}$ -in. wood throughout. The vibrations of the horn walls were much more intense for the same electrical input signal. It was necessary to install heavy braces between partitions, and still the braces vibrated. Only by bracing the braces was the problem solved. A clue to the reason came when it was observed that the resonant frequencies of thick partitions were higher than those for the thinner vibrations, other factors being the same. Now, the rigorous theory of vibrating plates is highly complicated but a simpler explanation appears plausible. Consider the following equation for the natural frequency of a simple oscillator:

$$f = \frac{1}{2\pi} \sqrt{\frac{s}{m}} \quad (5)$$

where m = mass of the vibrating body
 s = stiffness factor

In this case the "stiffness" is the reaction of the wood to bending. If we double the thickness of the wood the mass of the body is doubled. However, the stiffness of the wood increases much more rapidly than the mass. Consequently, the natural frequency increases: it does not decrease as might be expected. The only advantage gained by increasing the thickness of the wood is the consequent increase in mechanical resistance. Apparently, this advantage is sometimes outweighed by the increase in the resonant frequency if this shift means that the resonant frequency is raised from a sub-audible to a value which causes poor transient response in the audible range. It appears



Fig. 4. The completed duplex-horn speaker. Barely visible is the protecting screen which hides the mechanism under normal illumination.

that the most effective way to damp out horn vibrations is to use relatively thin wood and to coat the outside of the horn with viscous damping material to lower the "Q" of the vibrating element.

The only difficulty experienced with this speaker when first constructed along the lines indicated by Figs. 2 and 3 was undesired cavity resonance of the Helmholtz type in the speaker chamber. This trouble was effectively eliminated by decreasing the volume of the chamber below that shown in the diagrams. One

simple way of doing this is to fill part of this space with sound absorbing material. Another is to block off part of



Fig. 5. Speaker chamber in the top section. The plywood partition below the speaker magnet indicates the reduction in chamber volume which was required to reduce cavity resonance.


the chamber by the use of additional partitions. The writer employed the second alternative, as shown in Fig. 5.

The front of the completed unit can be covered by a grill to improve the appearance. Figure 4 shows a wood frame with bronze screening attached. Thick fabric should not be used, particularly in front of the high-frequency horn because it offers appreciable resistance at the higher frequencies, but Lumite plastic grill cloth may be considered satisfactory. The high-frequency horn shown in Fig. 4 is somewhat different from that shown in the diagrams of Figs. 2 and 3. The model shown in the photo-

Floating Action!

for all TV Cameras

"BALANCED" TV TRIPOD

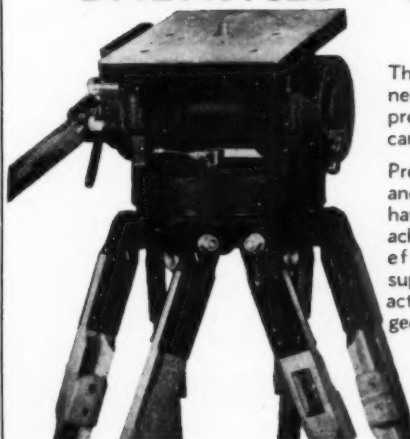

This tripod was engineered and designed expressly to meet all video camera requirements.

Previous concepts of gyro and friction type design have been discarded to achieve absolute balance, effortless operation, super-smooth tilt and pan action, dependability, ruggedness & efficiency.

Below:

3 wheel portable dolly with balanced TV Tripod mounted.




Complete 360° pan without ragged or jerky movement is accomplished with effortless control. It is impossible to get anything but perfectly smooth pan and tilt action with the "BALANCED" TV Tripod.

Quick-release pan handle adjustment locks into position desired by operator with no "play" between pan handle and tripod head. Tripod head mechanism is rustproof, completely enclosed, never requires adjustments cleaning or lubrication. Built-in spirit level. Telescoping extension pan handle.

Write for further particulars

CAMERA EQUIPMENT CO.
 1600 BROADWAY NEW YORK CITY

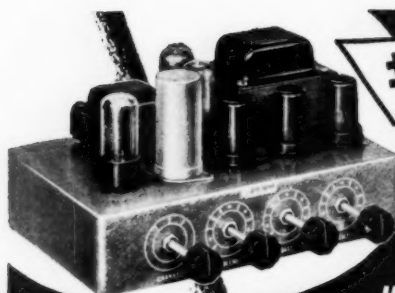

**Custom Quality
FOR LESS!**

new
Rauland
MODEL 1810
**HIGH-FIDELITY
PHONOGRAPH AMPLIFIER**

SPECIFICATIONS

Output: Measured at 100, 400 and 5000 cps—10 watts at 3% harmonic distortion. Percentage intermodulation distortion at 60 and 7000 cycles with 4 to 1 ratio—2 watts 1.5% (home level), 5 watts 3%, 10 watts 5%.

Gain: Magnetic phono input 103 db (10,000 ohms), crystal pickup (aux.) input 80 db (500,000 ohms), 73 db (100,000 ohms).

Frequency Response: ± 1 db 40 to 20,000 cycles per second.

Tone Controls: Separate boost type controls. Bass +13 db to -7 db at 40 cycles; treble +10 db to -20 db at 15,000 cycles.

Output Impedances: 4, 8 and 16 ohms.

Hum and Noise Level: 45 db below rated output (unweighted) on phono; 75 db below rated power output (unweighted) on aux.

Tubes: 1-68C7, 1-68Q7, 1-68L7, 2-6V6GT, 1-5Y3GT.

Power Consumption: 75 watts, 117/130 volts, 60 cycles. Chassis is finished in handsome light-green hammerloid. Size: 10 $\frac{1}{2}$ " x 6 $\frac{1}{2}$ " x 6" high overall.

**THE IDEAL LOW-COST HI-FI UNIT
FOR CUSTOM INSTALLATIONS**

Here's a high-quality adequately powered unit capable of the finest high-fidelity reproduction, and available at really low cost. The RAULAND 1810 10-watt High-Fidelity Phono Amplifier is equipped with 3-position input selector switch for magnetic or crystal pickup and high level auxiliary input. Features include: built-in preamp for magnetic pickup, separate boost type bass and treble tone controls, and compensated volume control which increases lows when volume is reduced. There's nothing on the market comparable for features, performance and value. Available for immediate delivery from stock. Get the full details today!

graph employs a three-section horn. The two additional partitions were found desirable to increase the dispersion at middle and higher frequencies.

One variation of this design which was brought to the writer's attention deserves mention. It uses a conventional two way speaker with concentric tweeter in place of the single cone specified. Thus, no high frequency horn need be constructed. Reports indicate that excellent performance is obtained in this manner. Since most two-way speakers use large low-frequency cones the total length of the low-frequency horn is lowered for the same mouth area. For dual speakers with relatively high cross-over frequencies the action is threefold. The large horn is effective only at the lower frequencies, the middle range is taken from the front of the cone, and the "highs" are obtained from the tweeter.

The second type of horn for low-frequency radiation is a vertical corner-cabinet model which can be accommodated in the average home without too great a domestic upheaval—provided the cabinet-making abilities of the builder will satisfy the distaff department. This model will be described next month in Part II of this paper.

TECHNICANA

[from page 8]

nism which turns the equipment on and provides for a warm-up period needed for the amplifiers. In addition to the clock are a set of tubular chimes, striking mechanism, motor drive timing unit, contact discs, timing discs, and cam discs. The three sets of discs provide for the appropriate sequence at correct intervals with such random variation in time and sound as are peculiar to hand ringing.

The unit may be installed remote from the bell tower with several remote switch positions for sounding bell sequences, and clock control of the Angelus sequence. The accuracy of the unit is plus or minus two minutes which was adequate for the application. Greater accuracy may be obtained, however, using other types of clocks. The one in this unit is a spring driven clock with a rundown time of thirty-six hours, the motor being electrically re-wound every eight hours. The size of the dial is three inches. A synchronous clock with standby power would be the next step in improving the performance.

Music-Speech Level Ratios

Results of the BBC tests on switching between speech and music were published in *Wireless World*, December 1950. The tests included engineers, musicians, and the public. Also the tests were used to determine the preferred maximum sound level at which the various groups liked to listen. This was done in order to establish the change in equalization need between the monitor speaker channel and the program channel. Table I shows the preferred levels and Table II the preferred change in level between program material of various types.

Electroneering is our business

SOUND EQUIPMENT ***Rauland*** **INTER-COMMUNICATION**

RAULAND-BORG CORPORATION • 3523-L Addison St., Chicago 18, ILL.

9205 DEGAUSSER

Demagnetizes magnetic tape and film to erase recording and residuals. Accommodates 5400 foot reels of $\frac{1}{4}$ " tape; 1000 foot, 35mm. Write for Catalogue. Net Price \$69.50



CINEMA ENGINEERING COMPANY

1510 WEST VERDUGO AVENUE, BURBANK, CALIFORNIA

Export Agents: Prosser & Hansen, Ltd. • 301 Clay Street • San Francisco, Calif., U. S. A.

TABLE II

Preferred change in level db

From speech to speech	0
From music to speech	-4 to -5
From speech to loud-starting music	+2
From speech to quiet-starting music	+2 to +3
From speech to interval signal (Bow Bells)	-19

Voltage Regulator Tubes

An article on the use of neon voltage regulator tubes by C. Tuppin appears in the September 1950 *Toute la Radio*. Techniques for the stabilization of both d.c. and a.c. voltages are discussed, and trigger tubes are mentioned briefly. Of importance is the table of regulator tubes available in France. Some of these tubes are capable of stabilizing voltages as high as 340 volts while others have current ranges up to 200 ma. Most of these tubes are not marketed in this country, although they would appear to be quite useful in many applications where designers are now forced to use series or parallel connection of available tubes.

HOW GOOD IS AN AUDIO TRANSFORMER?

[from page 21]

Fig. 7 shows that for a step-down type. As in the previous section, it is assumed that winding resistances are negligible in comparison with the circuit impedances.

A complicating factor is the interwinding capacitance C_w , so it is usual to take steps to eliminate its effect. Some transformers incorporate shields between windings, connected to ground, so that interwinding capacitance is replaced by winding-to-shield, i.e. to ground, capacitance, effectively increasing existing winding capacitance slightly.

Where shields are not employed, it is





Fig. 8 (left). Elimination of C_w from Fig. 6, and Fig. 9 (right) from Fig. 7.

generally possible to connect the transformer so as to practically eliminate the effect of interwinding capacitance. Interwinding capacitance is the capacitance between the layers of turns that are nearest together in the two windings. By connecting the windings into the external circuit so that the signal potential to ground from one of these ends is zero, the interwinding capacitance will become virtually the capacitance from the other winding to ground. If the ends nearest together in both



MIDGET CONDENSER MICROPHONE

For Precision Sound Measurements and High Quality Sound Recording

Built to give years of service without change in calibration. Even without dessicators, Kellogg Midget Condenser Microphones show no detectable drift in laboratory service. Proven in use for optimum performance for more than 15 years.

- RUGGED CONSTRUCTION
- EXCEPTIONAL CALIBRATION STABILITY
- UNAFFECTED BY VARIATIONS IN HUMIDITY

PRINCIPAL CHARACTERISTICS

	MODEL A	MODEL B
RESPONSE (Referred to 1 volt dyne cm ²)	-59 db	-55 db
FLAT TO WITHIN	± 3 db from 20 to 11,000 cps, for closed cavity without grille.	± 4 db from 20 to 15,000 cps with or without grille for perpendicular incidence in free field.

Users Include government laboratories, universities, audio development laboratories, sound studios and industrial plants manufacturing sound equipment.

SEND FOR FULL SPECIFICATIONS TODAY! WRITE DEPT 27-C

Kellogg

Established 1897

SWITCHBOARD AND SUPPLY COMPANY

6450 South Cicero Avenue, Chicago 38, Illinois

MIDGET CONDENSER MICROPHONE

Before you spend money for RECORDS, consult High Fidelity

the Big Magazine of Information about Records and Hi-Fi Equipment for Your Home

BEFORE YOU BUY NEW RECORDS: Make it a habit to check the reviews in HIGH-FIDELITY by such outstanding critics as John Conly, Alfred Frankenstein, C. G. Burke, and John Indcox. If a new release is worth buying, you'll find it listed. Also, you'll find it compared with other recordings of the same composition. Thus HIGH-FIDELITY can help you to avoid mistakes, and to choose the best recording of any composition you want. Playing time and price of each record is shown.

SPECIAL FEATURE: The Spring Issue contains C. G. Burke's monumental research work which reviews every LP ever made of Beethoven's music. In book form, it would occupy 120 pages.

BEFORE YOU BUY HI-FI EQUIPMENT: Make it a habit to consult the elaborately-illustrated articles in HIGH-FIDELITY on record-players, styli, tape recorders, FM and TV tuners, amplifiers, speakers, and modern decorative ideas for home installations, all described in non-technical language.

Mail Coupon Today! Big Spring issue now ready for mailing.

Mr. Charles Fowler, Editor, High Fidelity Magazine
26 Audio Building, Great Barrington, Mass.

Please enter my subscription to High Fidelity Magazine:
☐ \$6.00 for three years (SAVE \$6) ☐ \$3.00 for one year (SAVE \$1)

Name _____

Address _____

Add 50¢ per year for Canada, \$1.00 foreign countries

HIGH-FIDELITY is a quarterly magazine, devoted to the interests of people who enjoy the best in home musical entertainment. It is a large-size magazine, beautifully illustrated, and handsomely printed on fine paper.

MILTON B. SLEEPER



windings have zero signal potential to ground, the effect of interwinding capacitance is completely eliminated, not even adding to effective winding capacitance, because there is no signal potential across it. (Any d.c. potential between windings will not produce capacitance currents.)

When the effect of interwinding capacitance has been eliminated, the circuits of Figs. 6 and 7 become those shown at Figs. 8 and 9 respectively. Now, as in the l.f. case, each circuit becomes a simple resonant circuit, in which the impedance connected to the

low side of the transformer is series damping, while that connected to the high side is shunt damping. Figure 10 shows the h.f. response due to (a) less-than-critical damping, (b) critical damping, (c) more-than-critical damping.

Common cases where inadequate damping gives rise to a h.f. peak are interstage transformers operated in the plate circuit of triodes, and output transformers for tetrode or pentode tubes. Careful attention to the circuit can eliminate an undesirable peak or loss and produce the best possible response.

The internal properties of an audio transformer that set a limit to its frequency range at the upper end are its leakage inductance and the winding capacitance of the high side (including additional capacitance connected across the winding externally, such as grid input and strays). The ultimate cut-off frequency is inversely proportional to the square root of the product of this inductance and capacitance. Both these quantities increase with the size of the transformer so it is clear that smaller transformers have an inherently higher frequency range.

FIFTH PRINTING


Just off the press

AND **STILL GOING STRONG!**

audio anthology

Paper cover . . . \$2.00

Distributors write for quantity discount

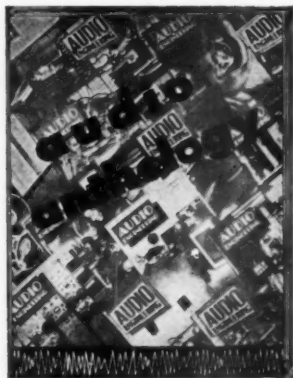

The long awaited compilation of reprints from early issues of AUDIO ENGINEERING, most of which are unobtainable.

Contains 37 articles on the following subjects:

- Amplifiers
- Phonograph Equipment
- Speakers
- Tone and Loudness Controls
- Noise Suppressors
- Dividing Networks

These articles have been of great interest to readers of AUDIO ENGINEERING over the past three years. Assembled in one volume, they comprise the most authoritative reference work for the audio hobbyist.

CUT OUT—MAIL TODAY—

Book Division, Dept. A9
Radio Magazines, Inc.
342 Madison Ave., New York 17, N. Y.

Sirs: Enclosed is my ☐ check ☐ money order for _____ copies of the Audio Anthology.

Name (print carefully)

Address

City Zone State

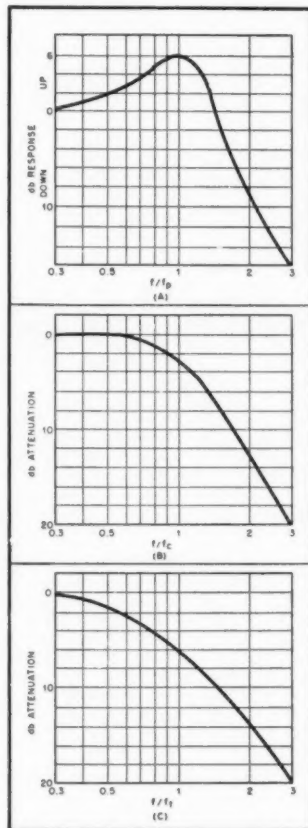


Fig. 10. Attenuation responses for high-frequency cut-off: (A) less-than-critical damping; (B) critical damping; and (C) more-than-critical damping.

Successful operation of any transformer depends appreciably upon the circuit in which it is worked, and the manufacturer's specification does not wholly determine how good any particular transformer is for the job in hand. Simple methods of measuring up the qualities of a transformer and of determining circuit modifications for optimum performance will be discussed in subsequent articles.

BE YOUR OWN CUSTOM-BUILDER

[from page 26]

one baffle form, nor does the tuning process apply to but one speaker. You need to know only the resonance of the speaker (check the manufacturer's specifications for this figure), the volume of the cabinet, then apply the following formula:

$$A = \frac{V^2 f^4}{6 \times 10^6}$$

where A = area of the port in square inches

f = frequency at which you desire to tune the enclosure

V = internal volume of enclosure in cubic feet

$$6 \times 10^6 = 6,000,000$$

Example: Suppose you are given an 8-cu. ft. enclosure housing an RCA LC-1A speaker. This model has a resonant frequency of approximately 35 cps, so you choose to tune the enclosure at 30 cps, i.e., about 5 cps below the resonant frequency of the speaker, so that in effect the resonance of the enclosure extends the lower range of efficiency of the speaker where it starts to fall off sharply below its resonant frequency. Thus

$$f = 30 \text{ cps}$$

$$V = 8 \text{ cu. ft.}$$

Therefore,

$$\begin{aligned} A &= \frac{8^2 \times 30^4}{6 \times 10^6} \\ &= \frac{64 \times 810,000}{6,000,000} \\ &= 8.7 \text{ square inches.} \end{aligned}$$

The resulting figure will give you the area of the tuning port for your particular baffle. But, brace the cabinet well. Scraps of wood, glued and screwed, can make your cabinet rigid as a brick wall (and what could be better?). Don't spare the sound-proofing material inside your baffle and you'll come away with a nicely matched unit for far less—considering the performance—than a specially-made speaker baffle.

Finally, we do offer this all-important suggestion: read carefully what the manufacturer has to say about his product. If you question your interpretation of his explanations, then write him, or call him. Critical comment or questioning is welcomed and properly answered. These people are proud of their products, the guaranty enclosed with each piece of audio equipment displays their pride. Should you find trouble, use that warranty. And most important, take advantage of the advice each manufacturer offers you. It means the proper answer to your need: better and more attractive reproduction of recorded and broadcast sound.

for flawless reproduction
**NO OTHER CARTRIDGE CAN
PERFORM LIKE A PICKERING**

patented design
Pickering
provides **DYNAMIC COUPLING***
throughout the entire audible range

* DYNAMIC COUPLING ASSURES

- constant stylus contact with the record grooves over the entire audio spectrum (20-20,000 cps)
- full frequency response
- full transient response

**NO RESONANCES
NO MISTRACKING
NO GRINDING OF
GROOVE WALLS**

Pickering Cartridges transmit all of the sounds in the musical spectrum, without loss of definition, just as a fine optical lens passes all of the colors in the rainbow.

For literature address Dept. A

Well-informed engineers and technicians, schooled in the science of electro-mechanics, know that only wide-range frequency response provides full transient response; the electronic phenomena which enables the reproduction of orchestral music with all the subtle sounds that give each musical instrument its individual character.

Pickering engineers and designers have but one objective . . . to produce products that will please the music lovers' insatiable appetite for the flawless recreation of recorded music . . . for the utmost in quality insist upon Pickering Audio Components.

Pickering
A COMPANY, INCORPORATED
OCEANSIDE, NEW YORK

Comparison proves—

McIntosh
**WORLD'S FINEST
AMPLIFIER!**

50W-2 Amplifier
50 Watts (Peak 100)

- Less than 1% harmonic or inter-modulation distortion even at peak power—reproducing the entire audible range from 20-20,000 cps.

Compare McIntosh 50W-2 with any amplifier—at any price. For it is only by such comparison that you can fully appreciate the truly superior qualities of this unique, patented instrument that has reached the theoretical limit of quality and efficiency! No other amplifier can give you so much power with so little distortion, at such low cost.

Write today for technical information and name of nearest dealer.


AE-2A Amplifier
Equalizer

MCINTOSH LABORATORY, INC.
321 Water St., Binghamton, N. Y.

get the best in Hi-Fi

get a **BROOK**

...at **ALLIED**



BROOK 12A3 AMPLIFIER AND PREAMP

10-watt amplifier. Low mu triodes in all stages. Response: ± 0.5 db, 20-20,000 cps; hum, 75 db below 10 watts. Brook transient peak circuit permits high output (over 10 watts) without increase in distortion. Distortion at full output: 1.21% total harmonic, 2.56% intermodulation. Controls: Bass (26 db boost) and treble; input selector switch; gain. Pre-amplifier, controls and inputs housed in separate remote consolette. Inputs: 1 tuner or TV; 2 magnetic phono. Outputs: 1.5 to 24 ohms tapped, with separate 500-ohm winding. With 9 tubes and 5U4G rect., 6 ft. cable. For 110-125 volts, 50-60 cycles AC. Drain, 110 watts. Size: amplifier, 17 x 6 1/2 x 8 1/2"; preamp., 12 3/4 x 6 1/2 x 3 3/4". Wt., 28 lbs. **97-844.** Brook Model 12A3 complete. Net. **\$198.00**
Easy terms: \$29.70 down, \$14.88 mo. for 12 mos.



BROOK 10C3 AMPLIFIER AND PREAMP

30-watt, ALL-TRIODE amplifier. Main unit consists of amplifier with power supply; remote control consolette contains pre-amplifier with controls, inputs and power switch. Response overall: within 0.5 db, 20-20,000 cps at all levels. Distortion at 30 watts: 1.30% total harmonic; 1.69% intermodulation. Hum level 75 db below full output. Controls: Separate bass (26 db boost) and treble; input selector; gain. Inputs: 2 for tuners, 2 with equalized preamp for magnetic cartridges. 1 high-gain for mike. Outputs: Tapped from 1.5 to 30 ohms with separate 500-ohm winding. With 13 tubes and 5U4G rectifier, 6 ft. cable. Amplifier, 17 x 8 1/2 x 8 1/2"; preamp., 13 x 6 1/2 x 4". For 110-125 v., 50-60 cycles AC. Drain, 125 watts. Shpg. wt., 50 lbs. **97-845.** Brook Model 10C3 complete. Net. **\$315.00**
Easy terms: \$47.25 down, \$23.66 mo. for 12 mos.



FREE 212-PAGE CATALOG

Send for Radio's leading Buying Guide featuring world's largest stocks of high-fidelity components, plus everything in Radio, TV and Industrial Electronics.

ALLIED RADIO

ALLIED RADIO CORP., Dept. 17-CC-2
833 W. Jackson Blvd., Chicago 7, Illinois

- ☐ Send FREE 212-Page ALLIED Catalog
☐ Ship the following Brook equipment:

\$ _____ enclosed (Full Payment).
☐ Down Payment enclosed

Name _____

Address _____

City _____ Zone _____ State _____

BEST BRITISH RECORDS OF 1950-1951

[from page 28]

	Casse-Noisette, Suites 1 & 2. O.S.C.C. (Fistoulari).	Lon. LLP441
	Sleeping Princess, Ballet Suite, O.S.C.C. (Desormiere).	Lon. LLP440
	The Four Seasons, Op. 8. Stuttgart Chamber O. (Münchinger).	Lon. LLP386
CONCERTOS		
Vivaldi	Piano Concerto No. 4. Gieseking & Ph.O. (von Karajan).	Col. LX1443/6
Beethoven	Violin Concerto in D. Haendel & Ph.O. (Kubelik).	H.M.V. C4126/30
Bruch	Violin Concerto No. 1. Campoli & New S.O. (Kisch).	Lon. LLP395
Ireland	"Mal Dun," symphonic rhapsody. Ireland & Hallé O. (Barbirolli).	H.M.V. DB9651/2
Liszt	Rhapsodie Espagnole. Bachauer & New London S.O.	H.M.V. C7854/5
Mendelssohn	Violin Concerto. Campoli & L.P.O. (van Beinum).	Lon. LP890
Mozart	Violin Concerto in G, K216. de Vito & R.P.O. (Beecham).	H.M.V. DB2177/9
Tchaikovsky	Piano Concerto No. 1. Solomon & Ph.O. (Dobrowen).	H.M.V. C3996/9
CHAMBER MUSIC		
Bliss	String Quartet No. 2 in F. Griller Quartet.	Lon. LP8299
Beethoven	String Quartet No. 15, Op. 132. Griller Quartet.	Lon. LLP318
Bloch	Quintet for piano & strings. Quintetta Chigiano.	Lon. LLP382
Dvorak	Piano Quintet in A, Op. 81. Quintetto Chigiano.	Lon. LLP202
Mozart	Quintet in G minor K516. Gilbert & Griller Quartet.	Lon. LLP132
	Divertimento No. 17 in D, K334. Members of the Vienna Octet.	*Decca LXT2542
	Fünf Kontretänze, K609. London Baroque Ensemble.	Parlo. R20597
Schönberg	Ode to Napoleon Bonaparte, Op. 41. Adler, Monod & Villers Quartet.	Esquire TW4002/3
Sibelius	String Quartet in D minor. Griller Quartet	Lon. LLP304
PIANO		
Bach	Chromatic Fantasia & Fugue in D minor. Schnabel.	H.M.V. DB9511/2
	Chorale Preludes: Nun Komm' der Heiden Heiland & Ich Ruf' zu dir. Lipatti	Col. LX1427
Chopin	The Waltzes. Lipatti.	Col. LX1341/6
Liszt	Deux Legendes & Années de Pelerinage. Kempff.	Lon. LLP315
Rachmaninov	Suite No. 2 for 2 pianos. Sellick & Smith. The 24 Preludes. Lympny.	Col. DX1675/7
Schubert	Sonata in B flat (Op. posth.) Kempff. Impromptu in C minor Op. 90 No. 1. Schnabel.	Lon. LLP328/9
	Impromptu in E flat Op. 90 No. 2 and Impromptu in G flat Op. 90 No. 3.	Lon. LLP307
	Schnabel.	H.M.V. DB21320
	Impromptu in A flat Op. 90 No. 4.	H.M.V. DB21335
Schumann	Schnabel.	H.M.V. DB21351
	Fantasia in C, Op. 17. Weisz.	Lon. LP8152
VIOLIN		
Paganini	Caprices, Op. 1. Ricci.	Lon. LLP259 & 264
PIANO AND VIOLIN		
Tartini	Sonata in G minor (Devil's Trill) Campoli & Gritton.	Decca AK2366/7
Walton	Sonata for violin & piano. Menuhin & Kentner.	H.M.V. DB9573/5
PIANO AND 'CELLO		
Beethoven	Sonata in C, Op. 102 No. 1. Schnabel & Fournier.	H.M.V. DB9555/6
Fauré	Elegie, Op. 24. Lush and Fournier.	H.M.V. DB21333
ORGAN		
Bach	Prelude & Fugue in E minor. Germani. Fantasia and Fugue in G minor (The Great) Marcel Dupre.	H.M.V. C3984/5
		Decca AK2364/5

(To be concluded)

NEW LITERATURE

• **Audio-Video Recording Co., Inc.**, 730 Fifth Ave., New York 19, N. Y. has recently published a new rate card, describing A-V equipment and listing rates for use of studio facilities, for tape recording, editing, instantaneous disc recording, master disc recording, and processing and pressing. Will be mailed free to any reader making use of recording media.

• **Thordarson Manufacturing Division, Maguire Industries**, Mt. Carmel, Ill. is making available to the electronics industry a finger-tip reference work covering more than 50,000 field-proved transformer designs. Included in the listing are design data covering practically every known type of filter, choke, and transformer presently required by the industry. The material will soon be published in book form and will be available to engineers.

• **Centralab Division of Globe-Union Inc.**, Milwaukee, Wis. has prepared the first color chart ever to include color-coding practices of the entire electronic industry. Included in the chart are codings for transformers, switchboard cable, HTMA and JAN capacitor and resistor values, speakers, and radio and TV chassis. Printed in eleven colors with over 3000 color markings, the chart will be found useful in all phases of electronic design, manufacture, and servicing. Distribution of the 30 x 36-in. chart is through Centralab distributors and jobbers.

• **Cornell-Dubilier Electric Corp.**, South Plainfield, N. J. is now distributing Catalog 200C, a comprehensive listing of service replacement capacitors. Units included in the catalog range from tiny moulded plastic types for use in receivers, to heavy-duty mica capacitors for transmitter application. Contained also are photoflash capacitors. Catalog 200C may be obtained free from Cornell-Dubilier jobbers.

• **M. A. Miller Manufacturing Co.**, 1169 E. 43rd St., Chicago 15, Ill. announces a revised version of the company's cross-reference replacement guide for recording and playback needles. Current as of December, 1951, the guide contains illustrations of various types of needles correlated with corresponding type designations of all manufacturers. Offered as a service to the trade, the guide will be supplied free upon written request.

• **University Loudspeakers, Inc.**, 80 S. Kenosha Ave., White Plains, N. Y. will capture the interest of everyone in the audio field with the "Technilog," a 28-page general catalog which provides the answers to many of the problems constantly facing sound technicians and custom installers. In addition to listing the complete line of University speakers, the Technilog contains scores of curves, tables, charts, and circuits, as well as practical discussions on such subjects as overload protection for speakers, impedance matching, baffling, and phasing. Copy obtainable through most radio parts distributors or by writing direct.

• **United Catalog Publishers, Inc.**, 110 Lafayette St., New York 13, N. Y. announces publication of the 16th edition of Radio Master, buying guide for the radio-TV-electronic parts industry. This latest version of what has become virtually an official reference work for the industry contains 1100 pages. More than 75,000 items are cataloged, including 7000 illustrations. Listings represent 90 per cent of all manufacturers of electronic parts and equipment. Copies obtainable from electronic parts jobbers.

• **Hickok Electrical Instrument Co.**, 10617 Dupont Ave., Cleveland 8, Ohio, will mail to interested engineers and technicians a free copy of Bulletin TT5, a 4-page folder illustrating and describing the latest 10-model selection of Hickok mutual-conductance tube testers. Testers described range from the Model 7001, priced in the thousand-dollar bracket, to popular-priced models for radio service application.

• **Astron Corporation**, 255 Grant Ave., East Newark, N. J. lists information of value to all users of capacitors in Catalog AC-3, a comprehensive display of the Company's complete line of dry electrolytics, metallized paper capacitors, and r.f. interference filters. Clear illustrations are enhanced with performance characteristics, schematic drawings, engineering design data, and test procedures. Requests for copy must be on company letterhead.



If you "talk test"...
you talk Peerless



PEERLESS S 240 Q

all tests demonstrate
PEERLESS
superiority



Square Wave



PEERLESS
Electrical Products

9356 Santa Monica Blvd.
Beverly Hills, Calif.

101 Sixth Avenue
New York 13, N. Y.



Division



THE NEW Concertone NETWORK RECORDER

INCORPORATES ADVANCES IN
ENGINEERING AND PERFORMANCE
FOUND IN NO OTHER TAPE RECORDER



"just like being there"

Direct drive eliminates idlers and clutches. Self-adjusting, positive disc brakes minimize maintenance. Simple threading plus push-button control affords foolproof operation.

Relay rack panel mounted (illustrated), in console cabinet or in portable cases, this dependable recorder meets every requirement of radio broadcast studios.

SEE AND HEAR THIS
SUPERLATIVE INSTRUMENT AT
I.R.E. Show, Audio Theatre 314-A

Write for
Brochure NWR-1



Manufactured by

Berlant Associates

4017 W. Jefferson Boulevard Los Angeles 10, California



NEW! 2ND EDITION
of the only complete
reference on **AUDIO!**

"The Recording & Reproduction of SOUND"

by **OLIVER READ**



Completely revised and vastly enlarged new edition
OVER 800 PAGES

largest selling book in its field

A "Must" for Sound Engineers, Hi-Fi Enthusiasts, P. A. Men, Broadcasting Stations, Recording Studios, Students

CONTENTS:

A Partial List of Authoritative Chapters:

Behavior of Sound Waves; Basic Recording Methods; Lateral Disc Recording; Microgroove Recording; The Decibel; Phono Reproducers; Stylus; Microphones; Loudspeakers and Enclosures; Dividing Networks and Filters; Attenuators and Mixers; Home Music Systems; P.A. Systems; Amplifiers; AM and FM Tuners—PLUS HUNDREDS OF OTHER SUBJECTS

Now you can have all the right answers to any subject in the field of Audio. Learn how to select and get the most out of recording equipment. Tells you how to select the proper amplifier for given applications, how to test amplifier performance, how to eliminate hum. Explains microphone, speaker and pickup principles and selection factors. Shows how to utilize inverse feed-back, expanders and compressors. Covers hundreds of subjects—a vast wealth of reliable information found in no other single volume. If you work in the field of Audio, this book belongs in your library. Order your copy today!

6" x 9"

Hard Covers

800 pages 700 illustrations

ONLY \$7.95

ORDER TODAY

Order from your Parts Jobber, or write direct to
HOWARD W. SAMS & CO., INC.
2201 E. 46th St., Indianapolis 5, Ind.

My (check) (money order) for \$..... is enclosed.

Send copy(ies) of *The Recording & Reproduction of Sound* (RR-2). \$7.95 per copy.

Name.....

Address.....

City..... State.....

NEDA and The REPS Dine and Dance Together

SATURDAY EVENING, January 26th, was a gala occasion for the members of the New York Chapters of both the National Electronic Distributors Association and "The Representatives" of Radio Parts Manufacturers. They turned out in full strength for a dinner and dance at New York's Commodore Hotel, and festivities lasted from 7:00 p.m. until exhaustion.

Starting with hors d'oeuvres and cocktails in the South Room, and continuing with a full-course filet mignon dinner in the Century Room, the members, guests, and their ladies celebrated in typical New York fashion.

The affair was staged by the Joint Committee, consisting of NEDA Chairman Milton Fischer with Rubin Green and Fred Rosenstein and the REP Chairman Jules Bressler with Dan Bittan and James Pickett, and the committee reports that "a good time was had by all."

Bressler started the speechmaking with a few introductory words, and welcoming speeches by Charles Ollstein, President of the N. Y. chapter of NEDA, and by James Pickett, president of the N. Y. chapter of the REPS put everyone in a good frame of mind. Honored guests were Joe De Mambro, president of the Boston chapter of NEDA, and Mrs. De Mambro, and the speakers' table was graced with NEDA vice-president Rubin Green, REP vice-president Harry Finkelstein, and secretary-treasurers William Green for NEDA and Wally for the REPS, together with their wives.

Entertainment was provided by a number of well-known artists, including comic Joey Karter of Philadelphia, the Andrews Twins with dance specialties, singers Roy Johnston and his wife, Liza Rutherford, and acrobatic dancer Mary Beth Olds.



THE AUDIO FAIR in CHICAGO

THE PLACE: The Conrad Hilton Hotel, Chicago

THE DATE: May 23rd and May 24th

THE TIME: Opens 10, 00 a.m. Friday, May 23rd

Closes 9:00 p.m. Saturday, May 24th

Quality Audio comes to Chicago

Will YOU be there?



A MONTHLY SUMMARY of product developments and price changes of radio-electronic-television parts and equipment, supplied by United Catalog Publishers, Inc. 110 Lafayette Street, New York City, publishers of Radio's Master.

These Reports will keep you up-to-date in this ever-changing industry. They will also help you to buy and specify to best advantage. A complete description of most products will be found in the Official Buying Guide, Radio's Master—available through local radio parts wholesalers.

ANTENNAS AND ACCESSORIES

AMPHENOL Temporarily discontinued 500-ohm Twin Lead Transmission line $\pm 14-358$ for FM & TV Antennas, while reinstating Flat Twin Lead $\pm 14-056$ (500) (1000) at \$25.80 net for M ft.

BAKER MFG. CO. Added Antenna Mast No. 10AM, 10'-section of 15-gauge tubing with special Baker joint for stacking at \$2.28 net and 20AM, 2-section 20' telescoping mast for 1-man straight up vertical erection at \$9.50 net.

BRACH MFG. CO. Withdrew ± 407 , 1 1/2" Cad. Univ. Base & ± 439 , 4-Bar-1 TV Antenna (stacked) while increasing the prices of two items and decreasing the price on one item in their line of TV Antennas & Systems.

PREMAX PRODUCTS. Revised their entire price line of products which include Antennas & Accessories.

RADELO MFG. CO. Reduced prices on following categories of their line: FM Diploids, TV Diploids, Dipole Accessories and TV Stacking Arrays. Introduced a number of new items on their line which include Mobile & Pulver Equipment, TV Stacking Arrays, and Dipole Accessories.

TAYLOR MFG. Five new items added to their line of TV Antenna Mast Bases.

BOOKS AND MANUALS

SAMS, HOWARD W. Added RE-2, "The Recording and Reproduction of Sound" at \$7.95 net, and Volume 14 Photofact sets in Deluxe Binder, 151 thru 160 at \$18.39 net.

VAN NOSTRAND. Increased price of publication "Elementary Radio Servicing" to \$4.00 net.

MISCELLANEOUS RADIO, TV AND ELECTRONIC PARTS

AUDIO DEVELOPMENT CO. Reduced prices of Output Transformers ± 147 to \$23.64 net and ± 146 to \$23.58 net.

CENTRALAB. Added two new Controls, B16-128, B16-228 . . . added 13 new Dual Concentric Controls to their SBBT series . . . added D-218, Custom Control . . . added Switches ± 1470 & ± 1471 . . . withdrew SBBT-676-S.

CHICAGO TRANSFORMER. Reduced prices approximately 10% on their entire line of Transformers & Reactors.

DAVIES WELDING CO. Replaced ± 4100 thru ± 4107 , Electronic Instrument Knobs with ± 4100 R, ± 4101 V, ± 4102 Q and ± 4103 W: all Pointer Knobs.

ERIE RESISTOR. Increased prices on their entire series of Erie button-style Silver Mica Capacitors, Styles 3708 R and 3709 A.

MALLORY & CO. Added five new Carbon & Wire Wound Controls and three new "LA" series Jacks.

NATIONAL CO. Decreased prices on capacitors PSE, PSL and PSR 25, 50 and 100 and also Bushings XS-3, 4, 5P, and 7, while increasing price of Insulators AA-3, CS-1 and 4L.

NUCLEAR INSTR. & CHEM. CORP. Introduced Model 1613A "Classmaster" at \$139.50 net and MRL Meter at \$31.50 to their line of Geiger Counters.

PHILBRO MFG. CO. Increased price of DPK, Voltage Doubler Unit to \$26.75 net and B109E, 6-0. Power Supply cord to \$4.48 net.

PLANET MFG. Added seven new items to their line of Dry Electrolytic Capacitors.

RAYTREM. Increased price of Rectifier RFR-1044 GR to \$130.00 User price and Withdrew RFR-1044 G.

STANDARD TRANSFORMER. Redesignated Line Adjusters P-6441 thru P-6444 to PV-6441 thru PV-6444 at same prices.


TRIAD TRANSFORMER. Prices on D-1 and D-2, Horizontal Output (Flyback) Transformers reverted back to old prices of \$6.27 net each.

TV DEVELOPMENT. Added ± 12 , Electric Cord Shortener at \$1.80 net . . . TV-100, TV Knobs sets at \$1.68 net . . . added a new series of 6 set screw type radio knobs available in quantities of 50.

RECORDING EQUIPMENT, SPEAKERS, AMPLIFIERS, NEEDLES, TAPE, ETC.

AMERICAN MICROPHONE. Added four new items to their line of Mikes & Phone Pickups.

CLEVELAND ELECTRONICS. Added Model 18, Automobile Rear Seat Speaker at \$5.37 net.



IT'S ALLIED FOR RCA

Electron Tubes for Industry

ALL TYPES IN STOCK

- Vacuum Power
- Thyratrons
- Vacuum & Gas. Rect.
- Ignitrons
- Cold-Cathode
- Phototubes
- Oscillograph Tubes
- Camera Tubes
- Monoscopes
- Special Types

FREE Interchangeability Directory

Valuable guide to selection of proper RCA tube type replacements. Lists 1600 tube types. Write for FREE RCA Guide No. 37-046.

Quick, Expert Service on RCA Tubes

ALLIED maintains in stock for quick shipment, the world's largest distributor inventory of RCA special-purpose tubes—of all types. We specialize in supplying the needs of industrial, broadcast, governmental and other users. To save time, effort and money—phone, wire or write to ALLIED. Fill all your needs quickly from the complete, dependable electronic supply source.

See Your 1952 ALLIED Catalog

Refer to your ALLIED Catalog for all electronic supplies—parts, tubes, test instruments, tools, audio amplifiers, accessories—available from the world's largest stocks. Write today for your FREE copy of the complete 212-page ALLIED Catalog.

FREE! Send for it now

ALLIED RADIO

833 W. Jackson Blvd., Dept. 17-C-2, Chicago 7, Ill.

Everything in Electronics from ONE Source

MISSING AN ISSUE?

1949	<input type="checkbox"/> June	<input type="checkbox"/> September	<input type="checkbox"/> December
1950	<input type="checkbox"/> January	<input type="checkbox"/> February	<input type="checkbox"/> August
1951	<input type="checkbox"/> March	<input type="checkbox"/> April	<input type="checkbox"/> May
1952	<input type="checkbox"/> February		<input type="checkbox"/> September <input type="checkbox"/> October

Payment Must Accompany Order

1949—\$1.00 each	1950—.50 each	1951, 1952—.35 each
AUDIO ENGINEERING	342 Madison Avenue	New York 17, N. Y.

Audio's New LABORATORY INSTRUMENTS

give you Precision Measurement at Moderate Cost



INTERMODULATION METER — Highest Professional Flexibility at Reasonable Cost.

Model 165 IM Meter is especially suited for laboratories, broadcasters, recording studios. Signal generator, analyzer, voltmeter in single case. Reads % IM, amplifier output directly on meter. Provides for use of scope to analyze & cure IM causes: full graphic instructions supplied. Wide range of low & high test frequencies: 60 cps internally, 40-200 cps externally; standard 2, 7, 12 kc internally, 2-20 kc externally. Voltage ratio choices: for LF testing, 4:1; for more accurate HF testing, 1:1. 8% x 19" rack-type panel; 8 1/4" deep. Price \$250.00.

Negligible loading with New BRIDGER

In bridging measuring instruments across high-Z circuits, lowest possible circuit loading is vital. Improvements in Model 100B's cathode follower circuit & special double-shielded cable reduce input capacity to only 3 mmf. Input Z: 70 megohms, 3 mmf, with 3 ft. cable. Output Z: 200 ohms. Output/input voltage ratio: 0.99. Usable to several hundred kc. Price \$96.50.



Do you have the data on our new GALVANOMETER-PROTECTOR? Write NOW for Catalog A.



SAVE
33 1/3%



This is our GROUP SUBSCRIPTION PLAN

You and your friends and co-workers can now save up to \$1.00 on each subscription to **AUDIO ENGINEERING**. The more men in a Group, the more each saves. If you send 6 or more subscriptions for the U.S.A. and Canada, they will cost each subscriber \$2.00, 1/3 less than the price of a regular 1-year subscription. **Present subscriptions may be renewed or extended as part of a Group.**

AUDIO ENGINEERING is still

- The only publication devoted entirely to Audio—
- Recording
- Broadcasting equipment
- Acoustics
- Home reproduction systems
- PA systems
- Psychoacoustics

(Please print)

Name
Address
Position Company

Name
Address
Position Company

Name
Address
Position Company

Name
Address
Position Company

Name
Address
Position Company

Name
Address
Position Company

Add \$5.00 to each Foreign subscription ordered

RADIO MAGAZINES, INC.
342 Madison Ave., N. Y. 17, N. Y.

KENT PRODUCTS. CB-100 and CB-106, metal changer bases for the Webster record changer added at \$4.08 net. **LEAN AMPLIFIER.** (British Industries). Added Model TL-25A, 25 watt Amplifier with BU/PA/10 Remote Control. Pre-amplifier, complete at \$249.00, and added TL-25A, 25 watt Amplifier only, at \$210.70 net.

MASCO. MHP-110 and MA-10-HF, High-Fidelity Amplifiers reduced to \$35.93 and \$51.24 net respectively. **MHP-110X and MA-10X.** High-Fidelity Amplifier with expander circuit reduced to \$46.55 and \$61.26 net respectively.

WILLER, W.A. Added Diamond Stylus for the following: 5 for G.I. Cartridge . . . 5 for Astatic . . . 4 for Electro-Voice . . . 2 for Philco . . . 1 for Philco-Columbia . . . 2 for R.C.A. . . . 3 for Shure Bros. . . . 2 for Magnatone.

SCOTT, HERMON HOSMER. Added new relay-rack Type No. 221-A Laboratory Amplifier, rated power output 20 watts at \$148.50 net and 221-A1 Amplifier at \$165.00 net, available on special order. (Output impedances of 4, 8, 16, and 500 ohms.)

UNIVERSITY LOUDSPEAKERS. Diffusor 8 added at \$21.60 . . . MM2TC-T and MSR-T, Railroad and Marine type speakers with transformers added volume control added at \$17.10 net each . . . reinstated transformer model 5420 at \$3.00 net while withdrawing RBP-8 and RBP-12, Radial Cone Speaker Projectors.

UTAH RADIO. Withdrew 30 items and added 4 items to their line of Speakers . . . also added series of 8 transformers.

TEST EQUIPMENT

SIMPSON ELECTRIC. Decreased prices of a.c. voltmeters Models 155, 156, and 157 to \$7.50 net for ranges 0-1.5 to and including 0-100 . . . decreased prices of a.c. voltmeters Models 55, 56, and 57 to \$8.10 net for identical ranges . . . prices on d.c. voltmeters Models 125, 126, and 127 decreased to \$7.65 net for ranges 0-3 to and including ranges 0-25.

TOOLS AND HARDWARE

UNGAR ELECTRIC TOOLS. No. 535, Heating Unit introduced at \$1.19 list. Due to the lack of Tantalum the following items replaced with 3/4" ELKALOY-A tips . . . #331 (straight pencil tip to replace #33780, #332 curved tip to replace #337), and #333 (chisel tip to replace #331) at \$1.15 list.

WELLER ELECTRIC. Decreased prices on eight items on their line of Soldering Equipment . . . added #7318, D-207 Trane, Assembly complete at \$10.50 net . . . #7334, S-107, Trane. Assembly complete at \$9.00 net.

TUBES—RECEIVING, TELEVISION, SPECIAL PURPOSE, ETC. . .

G.E. Increased prices on 112 Industrial & Transmitting Tubes and 66 Receiving Tubes. These new prices are not in excess of ceiling prices which have been filed by G. E. with the F.P.S. The following added Industrial & Transmitting Tubes: 61J (thyatron) . . . GL-5844 . . . TV Tube 17CP4 . . . increased prices on TV Tube 20HP4-A/20LP4 . . . reduced prices on Receiving Tubes 18JGT, 6AG5, 6AV6, 12AT6 and 25WAGT.

NATIONAL UNION. Increased price of Videotone 21FP4A to \$45.00 net and decreased 10BP4 and 10FP4A to \$23.00 net and 16AP4 to \$38.00 net.

RAYTHEON. Added two Picture Tubes, 17AP4 and 20CP4A . . . decreased prices of 15 Picture Tubes in 14", 16", 17", 19", and 20" size . . . increased price of 17HP4 to \$27.20 Suggested Dealer Price.

THOMAS ELECTRONICS. Increased prices on 11 Picture Tubes in 10", 16", 17", 19", 20", and 21" sizes . . . increased prices on three 16" tubes . . . withdrew two 19" tubes . . . added six in 16", 17", 20", and 21" sizes.

AUDIO PATENTS

[from page 6]

the product of resistance and transconductance is the same in both cases. With the 6BN6 the accelerator resistor would be somewhat higher than the plate resistor. To get maximum amplification, the third grid, instead of being tied to cathode, may be biased 2 to 5 volts positive.

Though the writer has not tested the circuit, it would seem to have excellent inherent balance throughout the frequency range. The impedances of both outputs are of the same order, there is no Miller effect, and one output phase has not been obtained by putting signal through two stages as against one stage for the other, as in most inverters.

Copies of any patent may be obtained for 25¢ each from the Commissioner of Patents, Washington 25, D. C.

CLASSIFIED

Notes: 10¢ per word per insertion for noncommercial advertisements; 25¢ per word for commercial advertisements. Rates are net, and no discounts will be allowed. Copy must be accompanied by remittance in full, and must reach the New York office by the first of the month preceding the date of issue.

SENSATIONAL REALISM that is hardly believable from hi-fi radio phonograph. Call OLInville 2-8615.

THE AUDIO EXCHANGE buys and sells quality high-fidelity sound systems and components. Guaranteed used and new equipment. Catalogue, Department AE, 159-19 Hillside Avenue, Jamaica 32, New York, OL 8-4445.

PARTNER wanted for established High-Fidelity business in Washington, D.C. Write Box CM-1, Audio Engineering.

CUSTOM QUALITY Williamson amplifiers at bargain prices. New Peerless 8-265-Q output, \$23. McProud horn with GE 8-1201D, \$49. Dr. Nicely, Kenton, Ohio.

WANTED: Worn sapphire needles—GE, Audak, Astatic, etc. for microphotographing. Box CM-2, Audio Engineering.

FOR SALE: In cases—one Magnecorder PT6-J & PT6-AH, \$375; one Magnecorder PT6-J & PT6-AH, \$475; Presto PT900R1 Portable Tape, 3 50-ohm inputs, \$650; Altec 323H Amplifier, \$65; make offer on Presto L2 playback amplifier-speaker unit; Presto L1 recording head \$25; Presto 6N recording case, \$20; Shipping charges COD. MASTER-TONE RECORDING CO., Box 1060, Des Moines 11, Iowa.

FOR SALE: Leeds and Northrup decade resistance box, 0-999.9 ohms in steps of 0.1 ohm, \$39. Heathkit VTVM, built, \$17. Heathkit capacitor checker, built, \$12. Jac Holzman, 189 W. 10th St., New York City. OR 5-7137.

1941 REK-O-KUT table and overhead lathe. Brush cutter. Best offer over \$60 cash or equipment. Details on request. Gordon, OMR Box 138, Keeler AFB, Miss.

WANTED: Jensen 18-inch Auditorium speaker, model M18-DC. C. Bonnell, 79 Dover St., Dayton 10, Ohio.

PRESTO 900R1 tape recording mechanism, \$325. RCA 15-watt PA amplifier, \$60. Transcription arm with new GE cartridge, \$25. Plotometer and AM Presto tuner, \$90. RECART, 1305 Market St., Philadelphia, Pa.

WOULD LIKE to purchase used Ampex or Magnecorder. State model, condition, price. Jac Holzman, 189 W. 10th St., New York City.


FOR SALE: 2 totally enclosed cabinets, #1—31" high, 22" wide, 17" deep, 5 cu.ft. #2—24" x 19" x 15", 2 cu.ft., both painted light gray, and lined with 1" felt. Sloping front, suitable for WE 728B, 754A, 755A, 756A; make offer. T. M. Olsen, 745 E. 242 St., Bronx 70, N. Y. FA 4-4866.

PROFESSIONAL DIRECTORY

Custom-Built Equipment

U. S. Recording Co.

1121 Vermont Ave., Washington 5, D. C.
Lincoln 3-2705

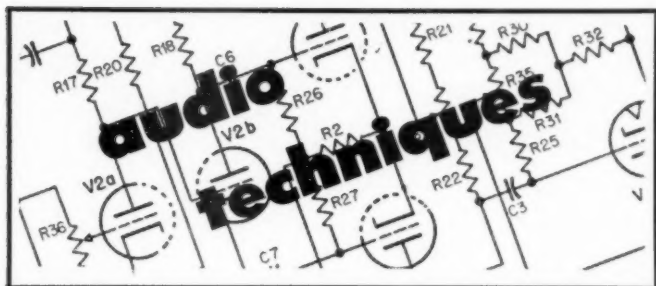

Improved Cathode Bias Circuit Affording Fixed Bias

JOHN A. MULVEY

OFTEN IN THE INTERESTS of economy, simplicity, or dependability—or all three—the designer of an audio output stage will decide to sacrifice the claimed advantages of fixed bias and use cathode bias. The conventional fixed-bias arrangement usually requires a separate transformer, or a bias-tapped power transformer, and a separate rectifier

is basically a cathode bias circuit. The idea is to return the grid circuits of the output tubes through a network built around the usual cathode bias resistor. This can be made to provide a fixed bias voltage between grid return and cathode. By choosing a suitable resistance value for the cathode resistor such that the voltage developed across it due to the

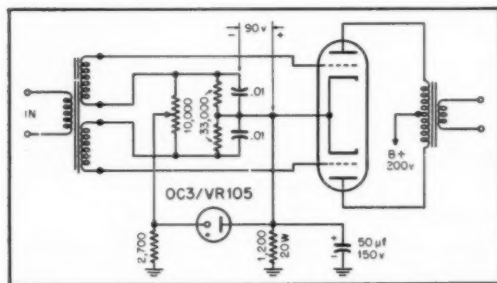


Fig. 1. Output stage arrangement to provide fixed bias from a cathode-bias circuit.

with its associated filtering network, besides the need for fusing the plate circuit of the output tube to protect it in the event of bias failure. Most fixed bias circuits take time to develop a bias voltage after a set is turned on, and thereby are apt to allow a certain period of improper operation to the output tubes. Though this interval of time may be small, it becomes significant when it recurs repeatedly as the set is turned on and off, as any amplifier usually is. With some tubes—the 6AS7G, for instance—the manufacturers specifically do not recommend fixed bias operation, since even a short period of high current drain from the cathodes before they are fully heated will seriously harm the tube. These considerations sway most designers to ignore fixed bias.

The accompanying diagram shows a simple inexpensive method used by the author for achieving fixed bias with what

total cathode current will be considerably more than required for bias voltage, a circuit such as that shown can be wired in parallel to it that will give almost perfect regulation to a voltage developed between some midpoint in the branch and the cathode. A filter capacitor could be substituted for the OC3/VR105 shown. However, this would delay somewhat the bias voltage developed for the grid. For such a substitution, a 6800-ohm resistor should be used instead of the 2700-ohm resistor shown. The use of a capacitor in this manner does provide one advantage in addition to a small saving in time of assembly and in expense, and it does provide a favorable automatic bias change with changing line voltage. The potentiometer shown is for balancing plate currents in the two tubes or in the two sections of such a tube as the 6AS7G.

Modifications suggest themselves for other tubes which require less bias voltage. The OA3/VR75 will provide an economy of required plate voltage.

3080 S. W. Spring Garden Road, Portland, Ore.


Air-Tone HEADQUARTERS FOR SOUND EQUIPMENT

NEW SENSATIONAL COLLARO
3-SPEED
RECORD
CHANGER



Available with the new orthodynamic
Pickup with Twin-point Styles


NEWCOMB AMPLIFIER



Complete line
of High Quality
Amplifiers, from
small single
units to large
rack installa-
tions

Air-Tone
SOUND AND RECORDING CO.
1527 CHESTNUT ST.
PHILA. 2, PA. • RI-6-8388

THE Bogen BATON!



Model H010 High Fidelity Amplifier
and Model RXP Remote Controller
YOU LEAD THE ORCHESTRA—from
your favorite easy chair—with complete re-
mote control of function selection, volume,
tone and record equalization.
Permits instant adjustment for
maximum enjoyment of each
selection on radio or phonograph.
Handsome, compact re-
mote control unit com-
plements every decor.

Write for FREE catalog A-3
David Bogen
CO., INC.
663 BROADWAY, NEW YORK 15, N. Y.

PIONEERS IN HIGH FIDELITY FOR OVER 20 YEARS

AUDIO engineering society

APPLICATION
FOR
MEMBERSHIP

P. O. Box 12, Old Chelsea Station, New York 11, N. Y.

I desire { admission into advancement in } the Audio Engineering Society. Grade desired

Print or Type Name in Full

Born at City State Country Date Age

Residence Street City State

Mail Address Street City State

Occupation Position Name and Address of Concern

Present Duties State in Detail (Students give school and course)

Past Experience Give Companies, Years, and Positions

Member of Other Societies Give Names or Abbreviations, and Grade of Membership

EDUCATION

SCHOOL ATTENDED	FROM	TO	COURSE	DEGREE

ADMISSION REQUIREMENTS

A Member, according to the constitution, may be any person active in audio engineering who has an academic degree or its equivalent in scientific or professional experience in audio engineering or in a closely related field or art. Such a person shall, upon election, be entitled to all the rights and privileges of the Society.

An Associate Member may be any person interested in the objectives of the Audio Engineering Society and, upon election, shall become entitled to all the rights and privileges of the society except the right to vote or to hold office or chairmanship of standing committees.

A Student Member may be any student interested in audio engineering and enrolled in a recognized school, college or university. A student member is not eligible to vote or to serve on committees except in his own local chapter.

Three references are required with application for the member grade, two for associate membership and one for student membership. References should be familiar with your work; they need not be members. Yearly dues are \$7.50 for member, \$6.00 for associate and \$3.00 for student, each of which is halved if the date of application is between April 1st and September 30th.

Payment must accompany application, and application must be signed to expedite handling.

REFERENCES

Name	Company and Address	Title or Position
1.		
2.		
3.		

Signature of Applicant

PLEASE DO NOT WRITE IN THIS SPACE

Application Received	Amount Received	Application to Admissions Committee	Dues Payment to Treasurer	Application Approved by	Date Approved	Membership Card	Past Papers

TWIN- TRAX® TAPE RECORDERS



...give you more

MORE MODELS

the most complete variety of recorders for professional, semi-professional and experimenter use.

MORE FEATURES

for better quality, smoother performance and easier operation.

MORE VALUE

because our direct sales policy saves you dealer markups.

Send today for our catalog 5109 which lists complete technical specifications and performance ratings for all recorder models and accessories. *Trademark Reg.

AMPLIFIER CORP. OF AMERICA

398 Broadway, New York 13, N. Y.

If you are moving, you must notify our Circulation Department at least 5 weeks in advance. The Post Office Dept. does not forward magazines sent to wrong destinations unless you pay additional postage, and we can NOT duplicate copies sent to you once. Please give old and new addresses.

RADIO MAGAZINES, INC.

342 Madison Ave.
New York 17, N. Y.

AE BOUND VOLUME

is ready

IT IS

Rugged

Handsome

Permanent

Convenient

a valuable addition to your library

\$8.95

Order now—Limited Supply

AUDIO ENGINEERING

342 Madison Ave., N. Y. 17, N. Y.

Industry People...

Rumor floating eastward from the Windy City hints that **Sam Poncher**, president, Newark Electric Co., Inc., Chicago, is planning to open one of the country's plushiest Sound Departments. . . . More than Windy City rumor is the announcement of **Harry N. Nelson**, manager of The Audio Fair, that there will be a Fair in Chicago come May—will be held in the Conrad Hilton hotel immediately following the Electronic Parts Show. . . . **Irving Greene**, Sound Department director of Manhattan's Sun Radio & Electronics Co. and co-author of the book "Make Music Live," is answering once more to "Sereneant"—thanks to **John Gony** article in current Atlantic Monthly. "Saturday Review of Recorded Music" is title of new book due off Prentice-Hall presses within a few weeks—written by **Edward Tatnall Canby**, **C. G. Burke**, and **Irving Kolodin**, all contributors to the Saturday Review of Literature. . . .

Charles Shaw has been appointed head of the newly expanded purchasing department of Triad Transformer Manufacturing Co., Los Angeles. . . . **Charles F. Cushtway**, formerly executive vicepres of Webster-Chicago Corp. has joined Crescent Industries, Inc., Chicago, in similar capacity. . . . **Paul Gaylor** is new vicepres in charge of merchandising for CBS-Columbia, Inc., New York, according to announcement of **David Cogan**, firm president. . . . **Leslie F. Muter**, head of the firm bearing his name, was re-elected president of the Radar-Radio Industries of Chicago, Inc. at annual meeting—other officers are **Paul V. Gysin** of Motorola, **Raymond F. Durst** of Hallicrafters, and **Richard Graver** of Admiral, vice-presidents; **James F. Wray** of Coname and **Charles M. Hoffman** of Belmont, directors, and **Robert S. Alexander**, treasurer. . . . New personnel manager of Canadian Aviation Electronics, Ltd., is **Francis J. MacMahon**. . . .

Karl Kramer technical service manager for Jensen Manufacturing Co., Chicago, scored customary hit in recent appearance before Indianapolis Section of I.R.E.—delivered paper on high fidelity in conjunction with demonstration of Jensen's G-610 Triaxial speaker. . . . **Eugene Mooske**, **George Adams** and **Howard Roth**, all industry pioneers, are announced by **L. M. Heineman**, president, as newest additions to top echelon of Permoflux Corp., Chicago. . . . **James Harger**, prominent Ridgewood, N. J. audio hobbyist, is new assistant to the president of Huffman & Boyle Furniture Co.

Harvey E. Sampson, president, Harvey Radio Co., New York, is latest of country's leading electronic jobbers to announce a catalog devoted solely to audio scheduled to leave the presses sometime in March. . . . **Hallicrafters, Inc.**, Chicago, reportedly on verge of marketing high-quality radio-phonograph in near future. . . . Other manufacturers rumored about to expand interests in audio field are **Stromberg Carlson** and **General Electric**. . . .

Everett E. Graner, vicepres of Graner Transformer Corp., Chicago, has assumed duties as Western sales manager for the firm. . . . **Minnesota Mining and Manufacturing Co.**, St. Paul, Minn., has promoted six key executives to new posts—names and new capacities are: **Louis F. Weyand**, executive v.p., **Robert W. Young**, board chairman of 3M International, **Clarence B. Sampair**, president of 3M International, **John A. Borden**, sales and marketing consultant for all 3M tapes, **George W. Swensen** and **Robert J. Tierney**, vicepres. of the parent company. . . . **Gordon C. LeRoy** has been appointed New York state sales rep by David Bogen Co., New York City.

LETTERS

[from page 10]

I do not think you should diffuse your emphasis into the problems of all types of intelligence carriers—leave that to others. And, if readers could stand Latin and Greek roots in one name, I suggest **Datumism Engineering** as a possible name.

J. N. A. Hawkins,
The Rollin Company,
2070 N. Fair Oaks,
Pasadena 3, California

(We think we've got about all we can handle with Audio alone.—Ed.)

NOW... CUSTOM QUALITY

enters low price field



CLARKSTAN MAGNETIC PICKUP

At last a quality variable reluctance, balanced armature magnetic pickup at low cost. The Clarkstan Model 204 features removable and replaceable stylus to permit use with all recordings, LP microgroove, and commercial pressing. Change the size of the sapphire ball point as desired without altering fine performance. Weighs 1/2 an ounce and plays all popular record changers having standard mounting holes 1/4" between centers. Encased in a beautiful transparent case 1 1/2" overall length. Velocity responsive (flat + 2 db) from 50 cps to 12,000 cps. Delivers .030 volt from average record. PRICE: \$204 cartridge only with sapphire needle \$3.40 net. \$204-D cartridge only with diamond needle \$21.00 net.

See your jobber or write for Bulletin 9A

CLARKSTAN
CORP.

ELECTRONICS DIVISION 9A

11921 W. PICO BOULEVARD
LOS ANGELES 64, CALIFORNIA

PROFESSIONAL-TYPE TAPE RECORDER

Uses Your Amplifier!

COMPLETELY
PORTABLE



Own a better tape recorder

—at a tremendous saving!

By using the TapeMaster with your own audio amplifier, you get professional-type performance—economically! Built to RMA standards, 7 1/2" per sec. tape speed. Fidelity equal to professional recorders. Fast forward and rewind. Complete master switching. Full monitoring. Inputs for Radio Phone and Mike. Outputs to Amplifier and Headphones. Push-Pull Supersonic Bias and Erase. Noise Record Level Indicator. One Knob Mechanism Control.

ORDER NOW ON 15-DAY TRIAL
YOUR MONEY BACK if not fully satisfied within 15 days. We prepay transportation charges if you send remittance with order.

WEXCO, INC.

WEXCO, INC.

Dept. A3-52

54 Illinois St., Chicago 10, Ill.

☐ Rush TapeMaster to me.

☐ Enclosed \$..... ☐ Ship C.O.D.

☐ Send full information on TapeMaster

Name

Address

City Zone State



SPEAKEASIES

Although there is no "boom" in the reproduction given by the Hartley-Turner 215 speaker (because they have no bass resonance), there has recently been quite a boom in Hartley-Turner speakasies. If you wonder what the heck these are, then you are not a subscriber to our technical data and news service.

But you who are know all about them, and our honest advice to you is that you start forming one just as soon as possible, for the simple reason that our ramifications throughout the U.S.A. are—well, just ramifying more than ever, and the time may come when you will not be able to do so because we have so many agents.

It is significant that this spurt in co-operative trading has come just after our visit to the Audio Fair, for the aftermath of that, apart from the obvious one of there being many more admirers of the 215 than ever before, is that it will not be very long before we enter the second phase of our "American campaign."

First we had to introduce you to a new and entirely exciting speaker which sounded like no other simply because it sounded REAL. After three years we can say with pride that the 215 is now very well spoken of in all quarters, and we are told that the company behind the speaker is not so bad either. Now we enter the period of solid establishment, for our speakers have come to stay with you for all time, gaining new friends. How that will be done will be told to you as our plans develop.

We are hopeful that by the time this advertisement, all our subscribers will have been given a foretaste of what is to come. If you are not a subscriber, the cost is just one dollar bill. There is nothing further to pay, and you will also be introduced to the speakasy.

The price of the 215 speaker is \$48.00 (all charges except import duty paid), but if you are a member of a speakasy it will cost you less. And at that price we are quite prepared to put it up against any other speaker at any price.

But if you don't feel like parting with a dollar, we shall be glad to send you a very comprehensive technical report on the speaker which will confirm what we have just said. Just a postcard saying "report please." We will do the rest.

H. A. HARTLEY CO. LTD.
152, Hammersmith Road
London W.6, England

ADVERTISING INDEX

Air-Tone Sound & Recording Co.	63
Allied Radio Corp.	58, 61
Altec Lansing Corp.	59
Amperite Co., Inc.	51
Ampex Electric Corp.	9
Amplifier Corp. of America	65
Arnold Engineering Co., The	13
Astatic Corp.	46
Audak Co.	39
Audio Devices	Cover 2
Audio Instrument Co.	61
Audio & Video Products Corp.	8
Belden Mfg. Co.	11
Bell Sound Systems, Inc.	52
Bell Telephone Labs, Inc.	16
Berlant Associates	59
Bogen, David, Co., Inc.	63
Camera Equipment Co.	53
Chicago Transformer Co.	42
Cinema Engineering Co.	54
Clarkstan Corp.	65
Classified Ads	62
Electro-Voice	37
Garrard Sales Corp.	3
Gates Radio Co.	7
General Electric Co.	45
Harrison Radio Corp.	43
Hartley, H. A. Co., Ltd.	66
Harvey Radio Co.	50
Heath Co., The	41
High-Fidelity Magazine	55
Hudson Radio & Television Corp.	29
Institute of Radio Engineers	2
Jensen Mfg. Co.	27
Kellogg Switchboard & Supply Co.	55
Leonard Radio, Inc.	49
McIntosh Engineering Labs, Inc.	57
Magnecord, Inc.	40
Maurer, J. A., Inc.	15
Minnesota Mining & Mfg. Co.	47
Orradio Industries, Inc.	Cover 3
Partridge Transformers Ltd.	66
Pentron Corp., The	14
Permoflux Corp.	10
Pickering & Co., Inc.	57
Presto Recording Corp.	31
Professional Directory	62
Radio Corp. of America	33, 34
Rauland-Borg Corp.	54
Reeves Soundcraft Corp.	5
Rek-O-Kut Co.	6
Sams, Howard W. & Co.	60
Shallcross Mfg. Co.	1
Shure Brothers, Inc.	4
Turner Co., The	44
U. S. Recording Co.	62
United Transformer Corp.	Cover 4
Wexco, Inc.	65

PARTRIDGE WILLIAMSON OUTPUT TRANSFORMER Built to the original specification

De-luxe model now available from stock from all important Radio Stores throughout the U.S.A. (Price \$26.00 duty paid)

This transformer is now accepted as the most efficient in the world. According to "Audio Engineering" (Nov. 1949), there is no U.S. equivalent. Thousands already sold in the U.S.A.

Partridge CFB Output Transformer, accepted as without rival. Series leakage induct .10 mh., primary shunt induct, 130 H., with "C" core construction and hermetically sealed. (Price \$40.00 duty paid)

The Following Stores are among those now Stocking Partridge Transformers.

Harvey Radio Co. Inc.	Terminal Radio Corporation
103 West 43rd Street,	85 Cortlandt Street,
New York 18.	New York 7.
Electronic Wholesalers	Gates Radio Company,
Inc.	2700 Polk Avenue,
2345 Sherman Ave.,	Houston Texas.
Washington, D. C.	Wholesale Radio Parts
Radio Electric Service	Co. Inc.
311 W. Baltimore St.,	
5 North Howard Street,	Baltimore 1, Maryland.
Baltimore 1, Maryland.	Sole Agents in Canada:
Gates Radio Company,	Atlas Radio Corporation,
Quincy, Illinois.	560 King Street West,
	Toronto 2-B.

If you are unable to purchase Partridge transformers in your city, write to us and mention the name of your dealer.

Fullest data, including square-wave tests, distortion curves, etc., together with list of U. S. stockists rushed Air Mail to you.

PARTRIDGE TRANSFORMERS LTD.
TOLWORTH, SURREY, ENGLAND

put 'er here,
partner!



500,000 Mail boxes in the United States are your partners in the fight against cancer.

A contribution addressed to "Cancer" in care of your local post office will help guard your family, yourself and your community.

Next time you see a mail box, "put 'er there, partner!"... as generously as you can.

AMERICAN CANCER SOCIETY

Here is my contribution of \$ _____ in support of the Cancer Crusade.

Name _____

Address _____

City _____ State _____

METERS ARE ACCURATE...

TALK IS NOT...

When an important conclusion is to be reached...when a dependable comparison is to be made...among several supposedly similar products...we do not rely upon conversation, claims and mere words! WE WANT FACTS...

So, when it comes to comparing Magnetic Sound Recording Tape...words don't mean a thing, unless supported by laboratory experience. And, in view of the ease with which accurate measurements can be obtained, it seems entirely unnecessary and even hazardous to make a choice based upon the uncertainty of the spoken word or written claim.

The Reason?


There are differences in Magnetic Oxides. ORRADIO molecular lubricated oxides are more stable to coating conditions and turn out more uniform dispersions...that is one of the reasons for the growing acceptance of ORRADIO Tapes.

Be sure your next Tape has molecular lubricated oxide. You can be sure of the finest recordings possible with ORRADIO 211RPA Plastic Base Professional Tape. Available at your local Radio Parts Distributor or at your favorite Photo Supply Store.

MAKE THIS ABSOLUTELY FOOL-PROOF TEST BY ACTUAL METER READINGS:

- 1 Splice end-to-end, ORRADIO IRISH BRAND 211 RPA with any conventional tape you may be now using.
- 2 Record a 6000 cps audio signal through the splice from ORRADIO 211RPA to the "comparison" tape.
- 3 Rewind and play back with your VU meter across the output.

THE DIFFERENCE WILL BE STARTLING!

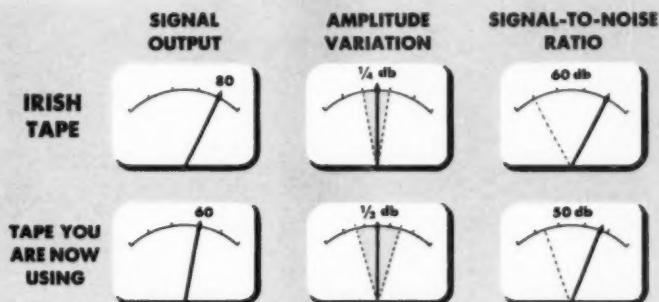

NOTE: The greater Volume Output of ORRADIO IRISH TAPE.

NOTE: The greater Amplitude Constancy of ORRADIO IRISH TAPE.

NOTE: The greater Signal-to-Noise Ratio of ORRADIO IRISH TAPE.

The performance results will be comparable at other frequencies, as well. This is metered proof of the superior quality of ORRADIO IRISH Magnetic Tapes.



SOUND RECORDING

Manufactured in U.S.A. by

ORRADIO INDUSTRIES, INC. OPELKA, ALABAMA


World's Largest Exclusive Magnetic Tape Manufacturer

ULTRA COMPACT UNITS...OUNCER UNITS

HIGH FIDELITY SMALL SIZE FROM STOCK

UTC Ultra compact audio units are small and light in weight, ideally suited to remote amplifier and similar compact equipment. High fidelity is obtainable in all individual units, the frequency response being ± 2 DB from 30 to 20,000 cycles.

True hum balancing coil structure combined with a high conductivity die cast outer case, effects good inductive shielding.

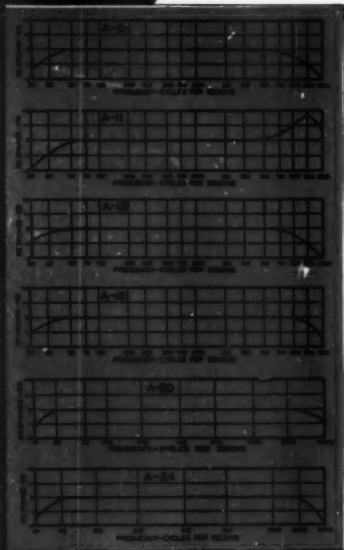

Type No.	Application	Primary Impedance	Secondary Impedance	List Price
A-10	Low impedance mike, pickup, or multiple line to grid	50, 125/150, 200/250, 333, 500/600 ohms	50 ohms	\$16.00
A-11	Low impedance mike, pickup, or line to 1 or 2 grids (multiple alloy shields for low hum pickup)	50, 200, 500	50,000 ohms	16.00
A-12	Low impedance mike, pickup, or multiple line to grids	50, 125/150, 200/250, 333, 500/600 ohms	80,000 ohms overall, in two sections	16.00
A-14	Dynamic microphone to one or two grids	30 ohms	50,000 ohms overall, in two sections	17.00
A-20	Mixing, mike, pickup, or multiple line to line	50, 125/150, 200/250, 333, 500/600 ohms	50, 125/150, 200/250, 333, 500/600 ohms	16.00
A-21	Mixing, low impedance mike, pickup, or line to line (multiple alloy shields for low hum pickup)	50, 200/250, 500/600	50, 200/250, 500/600	18.00
A-16	Single plate to single grid	15,000 ohms	60,000 ohms, 2:1 ratio	15.00
A-17	Single plate to single grid	As above	As above	17.00
A-18	Single plate to two grids	15,000 ohms	80,000 ohms overall, 2:3:1 turn ratio	18.00
A-19	Single plate to two grids	8 15,000 ohms	80,000 ohms overall, 2:3:1 turn ratio	18.00
A-24	Single plate to multiple line	15,000 ohms	50, 125/150, 200/250, 333, 500/600 ohms	16.00
A-25	Single plate to multiple line	15,000 ohms	50, 125/150, 200/250, 333, 500/600 ohms	17.00
A-26	Push pull low level plates to multiple line	30,000 ohms plate to plate	50, 125/150, 200/250, 333, 500/600 ohms	16.00
A-27	Crystal microphone to multiple line	100,000 ohms	50, 125/150, 200/250, 333, 500/600 ohms	16.00
A-30	Audio choke	250 henrys @ 5 MA 6000 ohms D.C., 65 henrys @ 10 MA 1500 ohms D.C.		12.00
A-32	Filter choke	60 henrys @ 15 MA 2000 ohms D.C., 15 henrys @ 30 MA 500 ohms D.C.		10.00



TYPE A CASE
1½" x 1½" x 2" high


UTC OUNCER components represent the acme in compact quality transformers. These units, which weigh one ounce, are fully impregnated and sealed in a drawn aluminum housing 7/8" diameter...mounting opposite terminal board. High fidelity characteristics are provided, uniform from 40 to 15,000 cycles, except for O-14, O-15, and units carrying DC which are intended for voice frequencies from 150 to 4,000 cycles. Maximum level 0 DB.



OUNCER CASE

7/8" Dia. x 1½" high

Type No.	Application	Pri. Imp.	Sec. Imp.	List Price
O-1	Mike, pickup or line to 1 grid	50, 200/250 500/600	50,000	\$14.00
O-2	Mike, pickup or line to 2 grids	50, 200/250 500/600	50,000	14.00
O-3	Dynamic mike to 1 grid	7.5/30	50,000	13.00
O-4	Single plate to 1 grid	15,000	60,000	11.00
O-5	Plate to grid, D.C. in Pri.	15,000	60,000	11.00
O-6	Single plate to 2 grids	15,000	95,000	13.00
O-7	Plate to 2 grids, D.C. in Pri.	15,000	25,000	13.00
O-8	Single plate to line	15,000	50, 200/250, 500/600	14.00
O-9	Plate to line, D.C. in Pri.	15,000	50, 200/250, 500/600	14.00
O-10	Push pull plates to line	30,000 ohms plate to plate	50, 200/250, 500/600	14.00
O-11	Crystal mike to line	50,000	50, 200/250, 500/600	14.00
O-12	Mixing and matching	50, 200/250	50, 200/250, 500/600	13.00
O-13	Reactor, 300 Hys.—no D.C.; 50 Hys.—3 MA. D.C.,		6000 ohms	10.00
O-14	50:1 mike or line to grid	200	½ megohm	14.00
O-15	10:1 single plate to grid	15,000	1 megohm	14.00

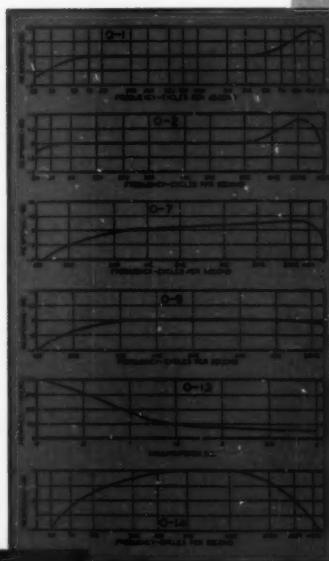

150 VARICK STREET NEW YORK 13, N. Y.
EXPORT DIVISION: 13 EAST 40th STREET, NEW YORK 16, N. Y., CABLES: "ARLAR"